



CY2318NZ CY2318ANZ

18 Output, 3.3V SDRAM Buffer for Desktop PCs with 4 DIMMs

Features


- One input to 18 output buffer/driver
- Supports up to four SDRAM DIMMs
- Two additional outputs for feedback
- I²C™ interface for individual output control
- Low skew outputs (< 200 ps)
- Up to 100 MHz operation
- Dedicated OE pin for testing
- Space-saving 48-pin SSOP package
- 3.3V operation
- The CY2318ANZ features an improved internal power-on reset circuit.

Functional Description

The CY2318 is a 3.3V buffer designed to distribute high-speed clocks in PC applications. The part has 18 outputs, 16 of which can be used to drive up to four SDRAM DIMMs, and the remaining can be used for external feedback to a PLL. The device operates at 3.3V and outputs can run up to 100 MHz, thus making it compatible with Pentium II® processors. The CY2318 can be used in conjunction with the CY2280, CY2281, CY2282 or similar clock synthesizer for a complete Pentium II motherboard solution.

The CY2318 also includes an I²C interface which can enable or disable each output clock. On power-up, all output clocks are enabled. A separate Output Enable pin facilitates testing on ATE.

Block Diagram

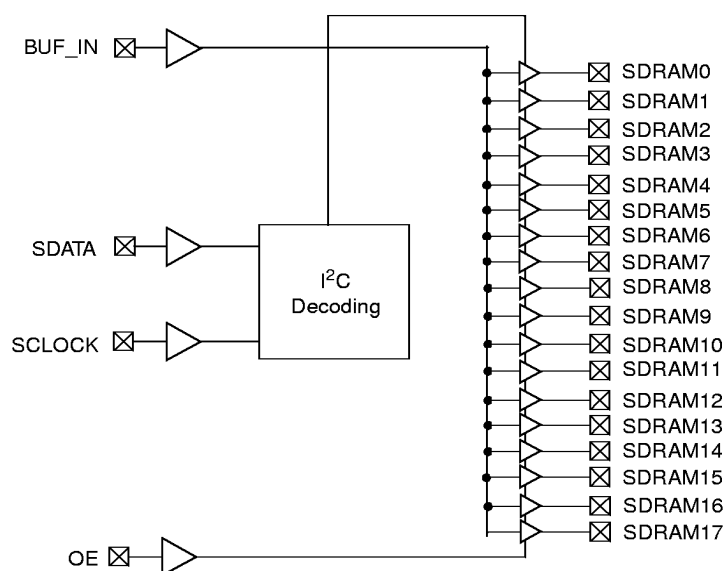

Pin Configuration

SSOP Top View

NC	1	NC
NC	2	NC
V _{DD}	3	V _{DD}
SDRAM0	4	SDRAM15
SDRAM1	5	SDRAM14
V _{SS}	6	V _{SS}
V _{DD}	7	V _{DD}
SDRAM2	8	SDRAM13
SDRAM3	9	SDRAM12
V _{SS}	10	V _{SS}
BUF_IN	11	OE
V _{DD}	12	V _{DD}
SDRAM4	13	SDRAM11
SDRAM5	14	SDRAM10
V _{SS}	15	V _{SS}
V _{DD}	16	V _{DD}
SDRAM6	17	SDRAM9
SDRAM7	18	SDRAM8
V _{SS}	19	V _{SS}
V _{DD}	20	V _{DD}
SDRAM16	21	SDRAM17
V _{SS}	22	V _{SS}
V _{DDIIC}	23	V _{SSIIC}
SDATA	24	SCLOCK

Pentium II is a registered trademark of Intel Corporation.
I²C is a trademark of Philips Corporation.



Pin Summary

Name	Pins	Description
V _{DD}	3, 7, 12, 16, 20, 29, 33, 37, 42, 46	3.3V Digital voltage supply
V _{SS}	6, 10, 15, 19, 22, 27, 30, 34, 39, 43	Ground
V _{DDIIC}	23	I ² C Voltage supply
V _{SSIIC}	26	Ground for I ² C
BUF_IN	11	Input clock (5V Tolerant)
$\overline{OE}$	38	Output Enable (active LOW), Three-state outputs when asserted ^[1]
SDATA	24	I ² C data input ^[1]
SCLK	25	I ² C clock input ^[1]
SDRAM [0–3]	4, 5, 8, 9	SDRAM byte 0 clock outputs
SDRAM [4–7]	13, 14, 17, 18	SDRAM byte 1 clock outputs
SDRAM [8–11]	31, 32, 35, 36	SDRAM byte 2 clock outputs
SDRAM [12–15]	40, 41, 44, 45	SDRAM byte 3 clock outputs
SDRAM [16–17]	21, 28	SDRAM clock outputs usable for feedback
N/C	1, 2, 47, 48	Reserved for future modifications, do not connect in system

Note:

1. Internal pull-up resistor to V_{DD} (value > 100 kohms).

Device Functionality

OE	SDRAM [0-17]
0	Hi-Z
1	1 x BUF_IN



Serial Configuration Map

- The Serial bits will be read by the clock driver in the following order:

Byte 0 - Bits 7, 6, 5, 4, 3, 2, 1, 0

Byte 1 - Bits 7, 6, 5, 4, 3, 2, 1, 0

.

.

Byte N - Bits 7, 6, 5, 4, 3, 2, 1, 0

- Reserved and unused bits should be programmed to "0".
- I²C Address for the CY2318 is:

A6	A5	A4	A3	A2	A1	A0	R/W
1	1	0	1	0	0	1	----

Byte 0:SDRAM Active/Inactive Register (1 = Active, 0 = Inactive), Default = Active

Bit	Pin #	Description
Bit 7	18	SDRAM7 (Active/Inactive)
Bit 6	17	SDRAM6 (Active/Inactive)
Bit 5	14	SDRAM5 (Active/Inactive)
Bit 4	13	SDRAM4 (Active/Inactive)
Bit 3	9	SDRAM3 (Active/Inactive)
Bit 2	8	SDRAM2 (Active/Inactive)
Bit 1	5	SDRAM1 (Active/Inactive)
Bit 0	4	SDRAM0 (Active/Inactive)

Byte 1: SDRAM Active/Inactive Register (1 = Active, 0 = Inactive), Default = Active

Bit	Pin #	Description
Bit 7	45	SDRAM15 (Active/Inactive)
Bit 6	44	SDRAM14 (Active/Inactive)
Bit 5	41	SDRAM13 (Active/Inactive)
Bit 4	40	SDRAM12 (Active/Inactive)
Bit 3	36	SDRAM11 (Active/Inactive)
Bit 2	35	SDRAM10 (Active/Inactive)
Bit 1	32	SDRAM9 (Active/Inactive)
Bit 0	31	SDRAM8 (Active/Inactive)

Byte 2: SDRAM Active/Inactive Register (1 = Active, 0 = Inactive), Default = Active

Bit	Pin #	Description
Bit 7	28	SDRAM17 (Active/Inactive)
Bit 6	21	SDRAM16 (Active/Inactive)
Bit 5	--	Reserved, drive to 0
Bit 4	--	Reserved, drive to 0
Bit 3	--	Reserved, drive to 0
Bit 2	--	Reserved, drive to 0
Bit 1	--	Reserved, drive to 0
Bit 0	--	Reserved, drive to 0



Maximum Ratings

Supply Voltage to Ground Potential -0.5 to +7.0V
DC Input Voltage (except BUF_IN) -0.5V to $V_{DD}+0.5$
DC Input Voltage (BUF_IN) -0.5V to 7.0V

Storage Temperature -65°C to +150°C
Max. Soldering Temperature (10 sec) +260°C
Junction Temperature +150°C
Static Discharge Voltage >2000V
(per MIL-STD-883, Method 3015)

Operating Conditions

Parameter	Description	Min.	Max.	Unit
V_{DD}	Supply Voltage	3.135	3.465	V
T_A	Operating Temperature (Ambient Temperature)	0	70	°C
C_L	Load Capacitance	20	30	pF
C_{IN}	Input Capacitance		7	pF

Electrical Characteristics Over the Operating Range

Parameter	Description	Test Conditions	Min.	Max.	Unit
V_{IL}	Input LOW Voltage ^[2]	For all pins except I ² C		0.8	V
V_{ILiic}	Input LOW Voltage	For I ² C pins only		0.7	V
V_{IH}	Input HIGH Voltage ^[2]		2.0		V
I_{IL}	Input LOW Current (BUF_IN input)	$V_{IN} = 0V$	-10	10	μA
I_{IL}	Input LOW Current (Except BUF_IN Pin)	$V_{IN} = 0V$		100	μA
I_{IH}	Input HIGH Current	$V_{IN} = V_{DD}$	-10	10	μA
V_{OL}	Output LOW Voltage ^[3]	$I_{OL} = 25\text{ mA}$		0.4	V
V_{OH}	Output HIGH Voltage ^[3]	$I_{OH} = -36\text{ mA}$	2.4		V
I_{DD}	Supply Current ^[3]	Unloaded outputs, 100 MHz		200	mA
I_{DD}	Supply Current	Loaded outputs, 100 MHz		360	mA
I_{DD}	Supply Current ^[3]	Unloaded outputs, 66.67 MHz		150	mA
I_{DD}	Supply Current	Loaded outputs, 66.67 MHz		230	mA
I_{DDS}	Supply Current	BUF_IN = V_{DD} or V_{SS} , all other inputs at V_{DD}		500	μA

Switching Characteristics^[4]


Parameter	Name	Test Conditions	Min.	Typ.	Max.	Unit
	Maximum Operating Frequency				100	MHz
	Duty Cycle ^[3,5] = $t_2 \div t_1$	Measured at 1.5V	45.0	50.0	55.0	%
t_3	Rising Edge Rate ^[3]	Measured between 0.4V and 2.4V	0.9	1.5	4.0	V/ns
t_4	Falling Edge Rate ^[3]	Measured between 2.4V and 0.4V	0.9	1.5	4.0	V/ns
t_5	Output to Output Skew ^[3]	All outputs equally loaded		150	200	ps
t_6	SDRAM Buffer LH Prop. Delay ^[3]	Input edge greater than 1V/ns	1.0	3.5	5.0	ns
t_7	SDRAM Buffer HL Prop. Delay ^[3]	Input edge greater than 1V/ns	1.0	3.5	5.0	ns
t_8	SDRAM Buffer Enable Delay ^[3]	Input edge greater than 1V/ns	1.0	5	12	ns
t_9	SDRAM Buffer Disable Delay ^[3]	Input edge greater than 1V/ns	1.0	20	30	ns

Notes:


- BUF_IN input has a threshold voltage of $V_{DD}/2$.
- Parameter is guaranteed by design and characterization. Not 100% tested in production.
- All parameters specified with loaded outputs.
- Duty cycle of input clock is 50%. Rising and falling edge rate is greater than 1V/ns.

Switching Waveforms


Duty Cycle Timing

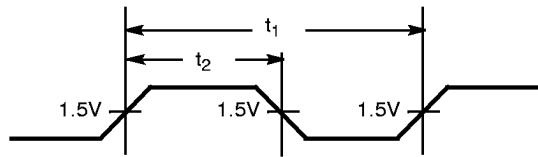


All Outputs Rise/Fall Time




Output-Output Skew

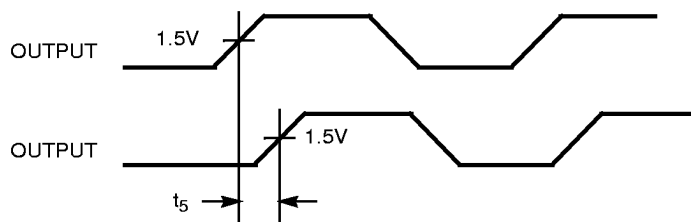


SDRAM Buffer LH and HL Propagation Delay

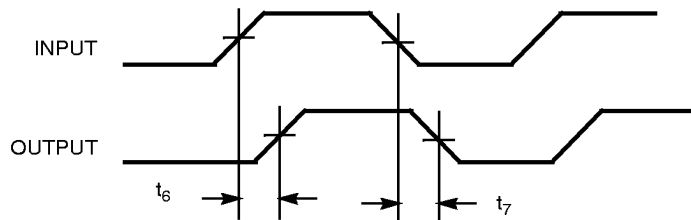


SDRAM Buffer Enable and Disable Times

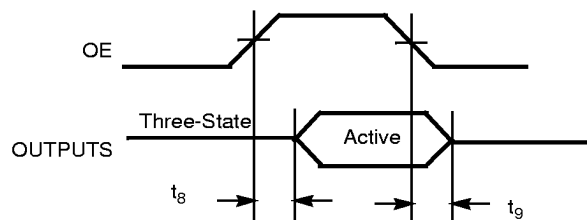

Test Circuit

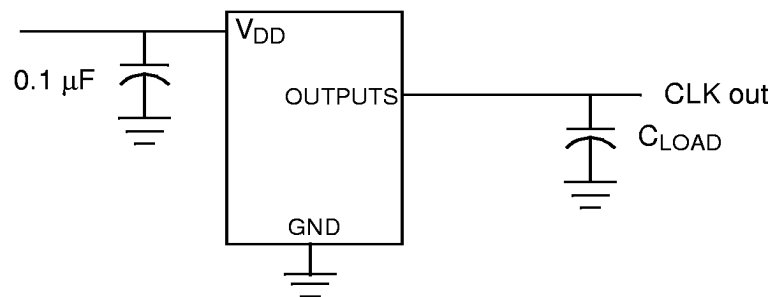

Application Circuit

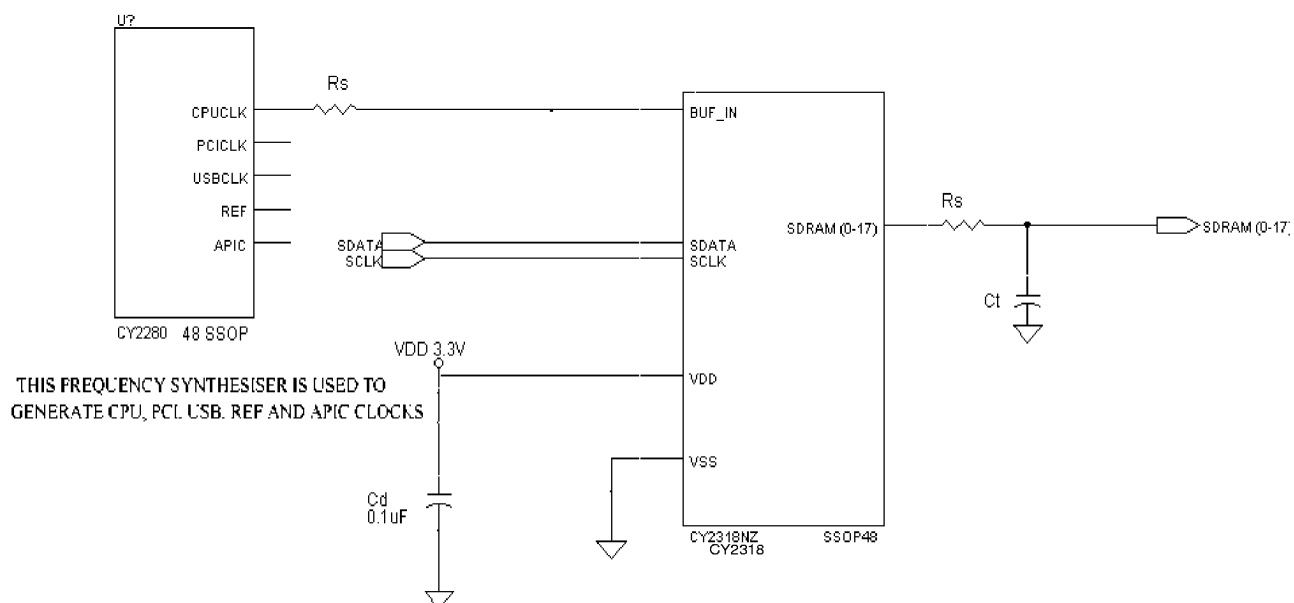

C_d = DECOUPLING CAPACITOR

C_t = OPTIONAL EMI-REDUCING CAPACITORS

R_s = SERIES TERMINATING RESISTORS

Ordering Information

Ordering Code	Package Name	Package Type	Operating Range
CY2318ANZPVC-1	O48	48-pin SSOP	Commercial
CY2318NZPVC-1	O48	48-pin SSOP	Commercial

Document #: 38-00608-D

Package Diagram

48-Lead Shrink Small Outline Package O48

