



Quartz Crystal Sockets

X2/UC moulded in Nylon PF
For crystals type 10XJ style 'B'
having pins .125" dia. spaced 3-18 12-70

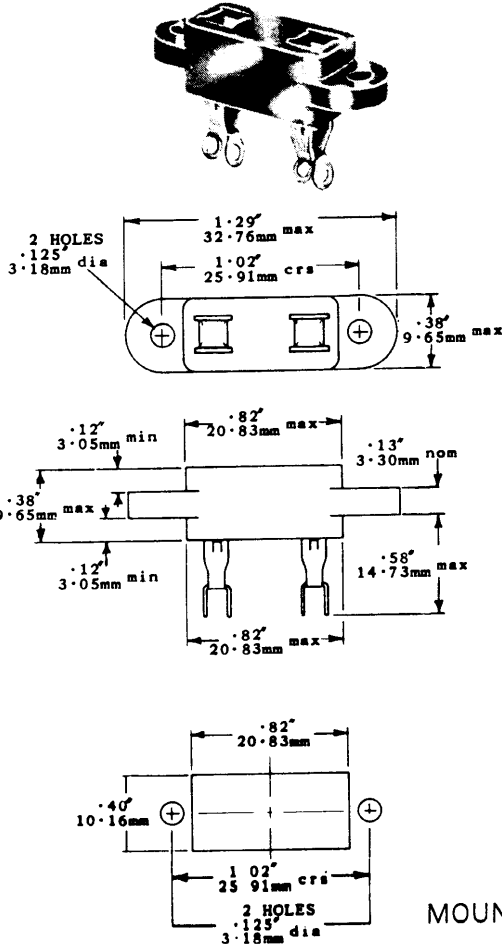


X3/UA moulded in Nylon PF
For crystals types 10X and 10XJ
styles 'A' and 'B'
having pins .125" dia. spaced 3-18 .50" or .75" 12-70 19-05

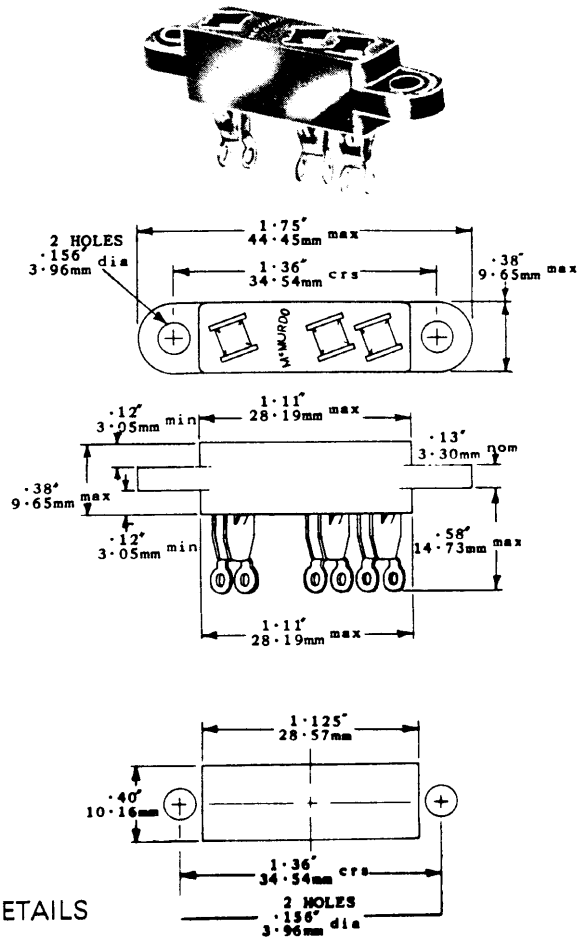


MOUNTING DETAILS

N2/UE (with solder tails)
N2/UE P.C. (with printed wiring tails)
Moulded in Nylon subminiature style for crystal 'K'
having pins .040" dia spaced 1-02 4-88

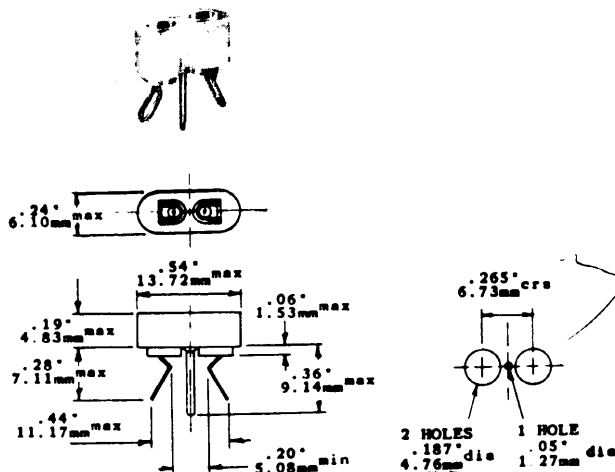

414-153

N2/UE P.C.



MOUNTING DETAILS

