
SURFACE MOUNT SCHOTTKY BARRIER DIODE

Features

· Low Forward Voltage



Absolute Maximum Ratings (T_a = 25 °C)

Parameter		Symbol	Value	Unit	
	SD103AW		40		
Peak Repetitive Reverse Voltage	SD103BW	V _{RRM}	30	V	
	SD103CW		20		
Average Forward Rectified Current		I _{F(AV)}	350	mA	
Non-Repetitive Peak Forward Surge Current at t ≤ 1 s		I _{FSM}	2	А	
Power Dissipation		P _{tot}	400	mW	
Operating and Storage Temperature Range		T_{j},T_{s}	- 65 to + 125	°C	

Characteristics at $T_a = 25 \ ^{\circ}C$

Parameter		Symbol	Min.	Тур.	Max.	Unit
Reverse Breakdown Voltage						
at I _R = 10 µA	SD103AW	V _{(BR)R}	40	-	-	V
	SD103BW		30	-	-	
	SD103CW		20	-	-	
Reverse Leakage Current						
at V _R = 30 V	SD103AW	I _R	-	-	5	μA
at V _R = 20 V	SD103BW		-	-	5	
at V _R = 10 V	SD103CW		-	-	5	
Forward Voltage						
at I _F = 20 mA		V _F	-	-	0.37	V
at I _F = 200 mA			-	-	0.6	
Total Capacitance		6		50		~F
at $V_R = 0 V$, f = 1 MHz		C _T	-	50	-	pF
Reverse Recovery Time at $I_F = I_R = 50$ mA to 200 mA , Recover	to 0.1 I _R	t _{rr}	-	10	-	ns








Ň



Dated : 17/11/2006

SD103AW...SD103CW

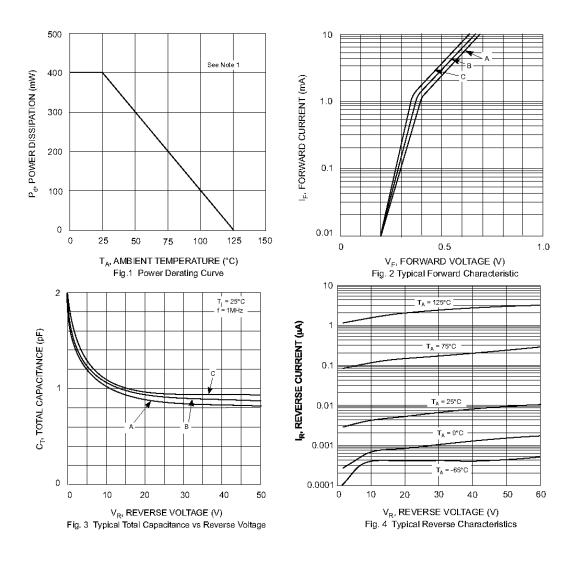








Dated : 17/11/2006

SD103AW...SD103CW

PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-123

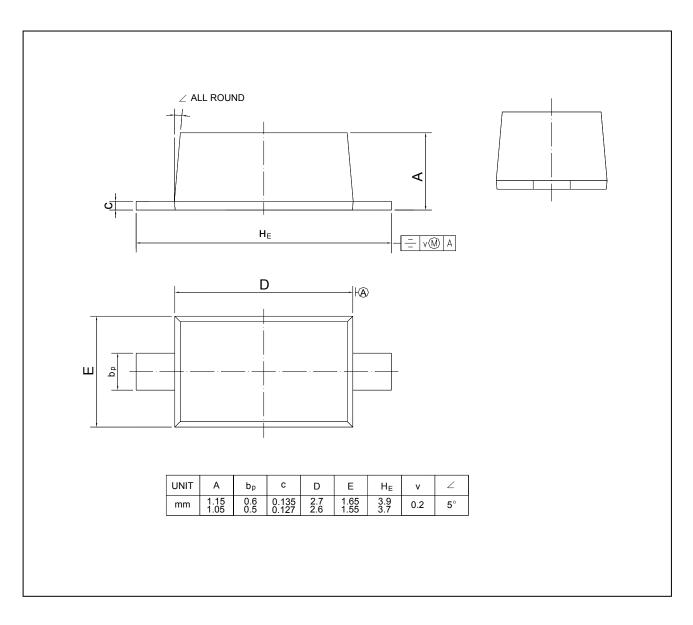







Dated : 17/11/2006