



4.25mm PITCH 2 PIN BATTERY CONNECTOR SPRING TYPE



060133MB Series

Specifications:

- Insulator Material : Black Thermo Plastic UL94V-O
- Operating Type Range : -40°C TO +105°C
- Terminal Material : Brass
- Platings : Contact Gold Plated
- Max. Current Rating : 2.0A
- Max. Voltage Rating : 12V AC
- Dielectric Strength : 250V AC For 60 Seconds

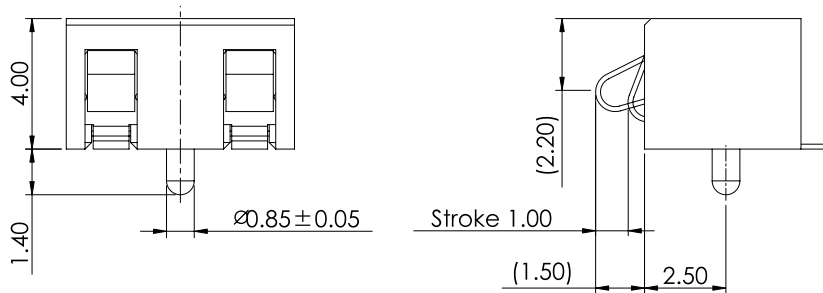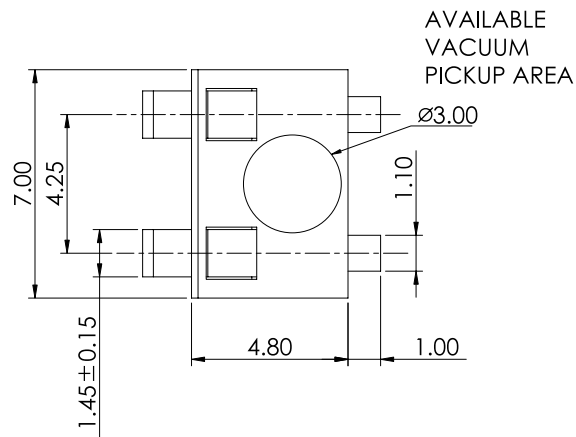


Order Information

060133MB002□□00ZL

1 2 3 4 5

1. 'B' : Right Angle SMT Type
 2. No. of pins.
 3. Plating
 4. Color 'Z' : Black
 5. Package
 'L' : Reel Package Without Cap
- Reference Page 11

Recommended P.C.B Layout



Mobile

BATTERY