

Jameco Part number 139491

MODEL NO.: 40TR12B (CASE:ALUMINUM/ BLACK)


TRANSMITTER UNIT:

Center Frequency (KHz)	: 40.0 ± 1.0
Sound Pressure Level (0 dB = 0.0002 μbar)	: 112dB/40 ± 1.0KH /10V SN/30cm /Min.
Band Width (KHz) Min.	: 5.0 / 100 dB
Capacitance (PF)	: 2000 ± 20%

RECEIVER UNIT:

Center Frequency (KHz)	: 40.0 ± 1.0
Sensitivity Min. (0 dB vs 1V μbar)	: 67dB/40 ± 1.0KH (R=3.9KΩ)
Band Width (KHz) Min.	: 5.0 / (at -75 dB)
Capacitance (PF)	: 2000 ± 20%

OUTLINE DIMENSION :




- A= 12.7 ± 0.2
- B= 9.4 ± 0.4
- C= 6.2 ± 0.8
- D= 8.5 ± 0.2

Unit:mm



• TEST CIRCUIT :

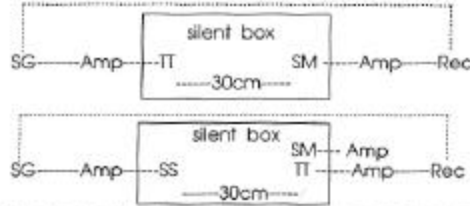

- TT : test transducer
- Rec : recorder
- SM : std. microphone
- Amp : amplifier
- SG : signal generator
- TT : test transducer
- Rec : recorder
- SM : std. microphone
- Amp : amplifier
- SG : signal generator
- SS : std. speaker
- R : resistance

MODEL NO.: 40TR12B (CASE:PLASTIC/BLACK)

TRANSMITTER UNIT:

