


Schottky Powermod

FST15380 – FST153100

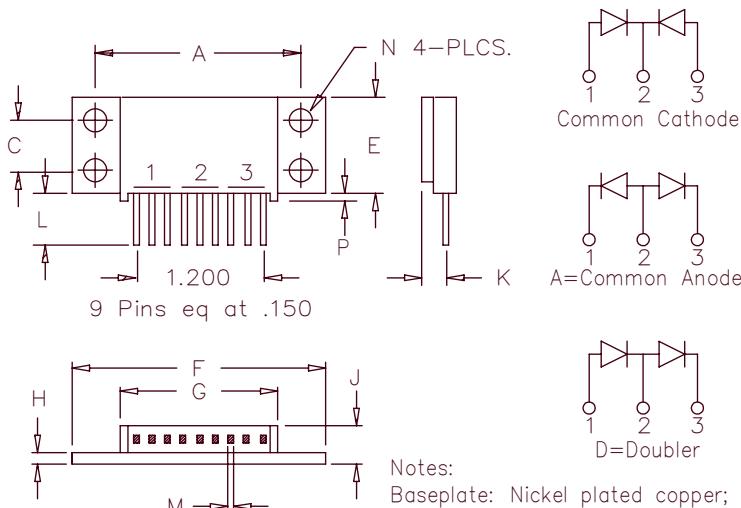

Dim.	Inches		Millimeter		
	Minimum	Maximum	Minimum	Maximum	Notes
A	1.995	2.005	50.67	50.93	
C	0.495	0.506	12.57	12.83	
E	0.990	1.010	25.15	25.65	
F	2.390	2.410	60.71	61.21	
G	1.490	1.510	37.85	38.35	
H	0.120	0.130	3.05	3.30	
J	—	0.400	—	10.16	
K	0.240	0.260	6.10	6.60 to Lead C	
L	0.490	0.510	12.45	12.95	
M	0.040	.050	1.02	1.27	Square
N	0.175	0.195	4.45	4.95	Dia
P	0.032	0.052	0.81	1.32	

Microsemi Catalog Number	Industry Part Number	Working Reverse Voltage	Peak Reverse Voltage	Repetitive Peak Reverse Voltage
FST15380*	153CMQ080	80V	80V	
FST15390*		90V	90V	
FST153100*	153CMQ100	100V	100V	

*Add the Suffix A for Common Anode, D for Doubler

- Schottky barrier rectifier
- Guard ring for reverse protection
- V_{RRM} – 80 to 100 Volts
- High surge capacity
- Reverse energy tested
- Electrically isolated baseplate
- ROHS Compliant

Electrical Characteristics

Average forward current per pkg	$I_{F(AV)}$	150 Amps
Average forward current per leg	$I_{F(AV)}$	75 Amps
Maximum surge current per leg	I_{FSM}	1200 Amps
Max repetitive peak reverse current per leg	$I_{R(OV)}$	2 Amps
Max peak forward voltage per leg	V_{FM}	.72 Volts
Max peak forward voltage per leg	V_{FM}	.94 Volts
Max peak reverse current per leg	I_{RM}	20 mA
Max peak reverse current per leg	I_{RM}	1.5 mA
Typical junction capacitance per leg	C_J	1500 pF

$T_C = 120^\circ\text{C}$, Square wave, $R_{\theta JC} = 0.5^\circ\text{C}/\text{W}$
$T_C = 120^\circ\text{C}$, Square wave, $R_{\theta JC} = 1.0^\circ\text{C}/\text{W}$
8.3 ms, half sine $T_J = 175^\circ\text{C}$
$f = 1 \text{ KHz}, 25^\circ\text{C}, 1\mu\text{sec}$ Square wave
$ I_{FM} = 75\text{A}: T_J = 125^\circ\text{C}^*$
$ I_{FM} = 75\text{A}: T_J = 25^\circ\text{C}^*$
$V_{RRM}, T_J = 125^\circ\text{C}^*$
$V_{RRM}, T_J = 25^\circ\text{C}$
$V_R = 5.0\text{V}, T_J = 25^\circ\text{C}$

*Pulse test: Pulse width 300 μsec , Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T_{STG}	-55°C to 175°C
Operating junction temp range	T_J	-55°C to 175°C
Maximum thermal resistance per leg	$R_{\theta JC}$	1.0°C/W Junction to case
Maximum thermal resistance per pkg	$R_{\theta JC}$	0.5°C/W Junction to case
Typical thermal resistance (greased)	$R_{\theta CS}$	0.1°C/W Case to sink
Mounting torque		15 – 20 inch pounds maximum
Weight		2.5 ounces (71 grams) typical

FST15380 – FST153100

Figure 1
Typical Forward Characteristics – Per Leg

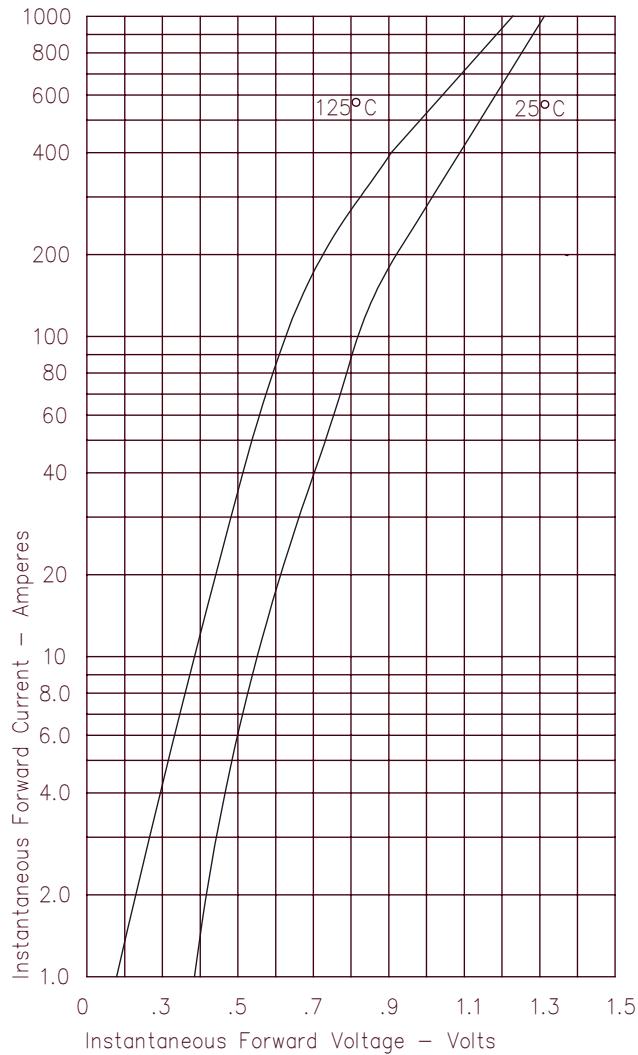


Figure 2
Typical Reverse Characteristics – Per Leg

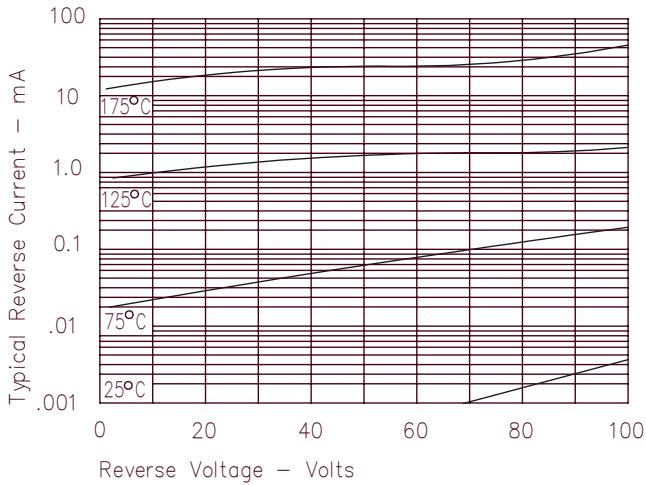


Figure 3
Typical Junction Capacitance – Per Leg

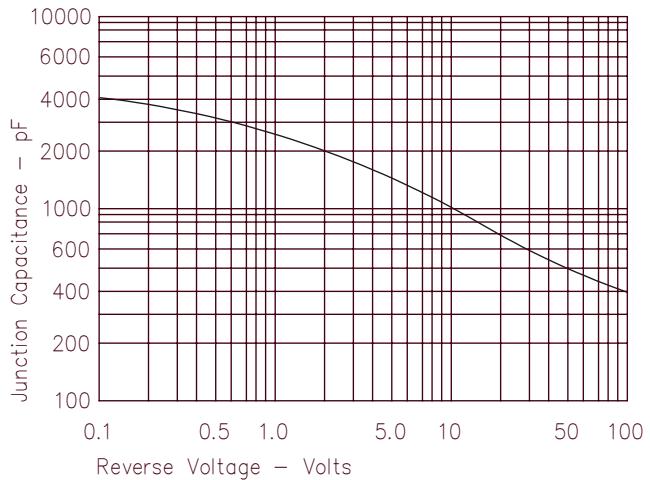


Figure 4
Forward Current Derating – Per Leg

