

INTRODUCTION:

Adam Tech DJ Series Circular DIN Jacks continue to be a popular interface for many applications. They are especially suitable for applications that require reliable transfer of low level signals. Available in a wide selection of positions they feature a choice of an all plastic body or a plastic body with metal face shield. Mounting selections include Right Angle or Vertical PCB mount and Panel Mount with or without mounting flange. Adam Tech DJ series jacks features an exclusive high reliability contact design which utilizes a dual wipe, extended fork contact. The jacks overall contact area is increased primarily in the mating area which helps maintain a constant contact pressure for superior electrical performance.

FEATURES:

Wide range of styles
Offered in 3 thru 13 positions
Standard and shielded versions available
Excellent for Low Level signal applications

MATING PLUGS:

All industry standard circular DIN plugs.

SPECIFICATIONS:

Material:

Standard insulator: PBT glass filled, rated UL94V-0
Optional Hi-Temp insulator: Nylon 6T, rated UL94V-0
Insulator Color: Black
Contacts: Brass
Shield: Copper Alloy, Bright Nickel plated

Contact Plating:

Tin over Copper underplate overall

Electrical:

Operating voltage: 20V DC max.
Current rating: 2 Amps max
Contact resistance: 20 mΩ max. initial
Insulation resistance: 500 MΩ min.
Dielectric withstanding voltage: 1000V AC for 1 minute

Mechanical:

Insertion force: 15 lb max.
Withdrawal force: 0.8 lb min
Mating durability: 5000 cycles min.

Temperature Rating:

Operating temperature: -55°C to +85°C
Soldering process temperature:
Standard insulator: 235°C
Hi-Temp insulator: 260°C

PACKAGING:


Anti-ESD plastic trays

APPROVALS AND CERTIFICATIONS:


UL Recognized & CSA Certified, File no. E224053




ORDERING INFORMATION RIGHT ANGLE PC BOARD MOUNT

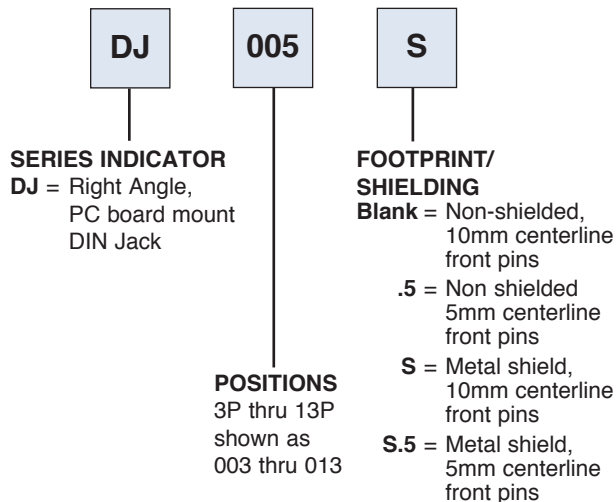


STRAIGHT PC BOARD MOUNT AND PANEL MOUNT VERSIONS

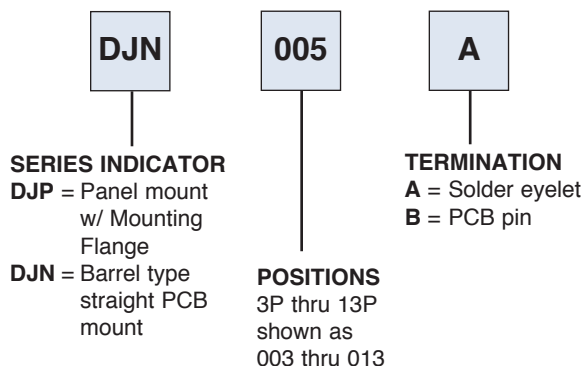

DIN JACK SHIELDED 5 POSITION

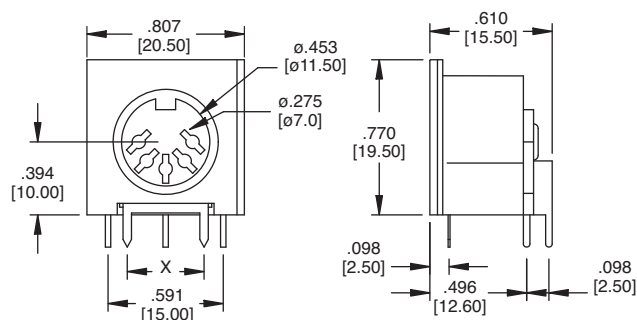


X = PITCH .197 [5.00] OR .394 [10.00]




DJ-005-S.5


DJ-005-S



DIN JACK NON-SHIELDED 5 POSITION

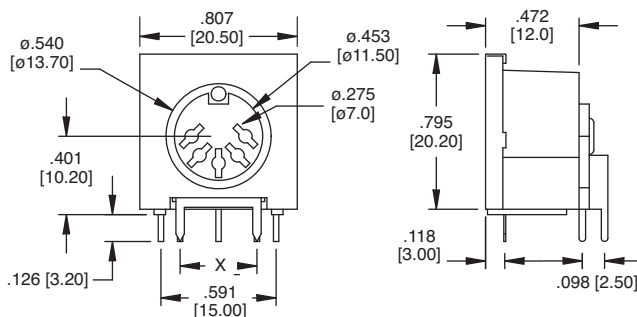


X = PITCH .197 [5.00] OR .394 [10.00]




DJ-005-.5

DJ-005




DIN JACKS NON-SHIELDED, POSITIONS: 3P, 4P, 6P, 7P, 8P

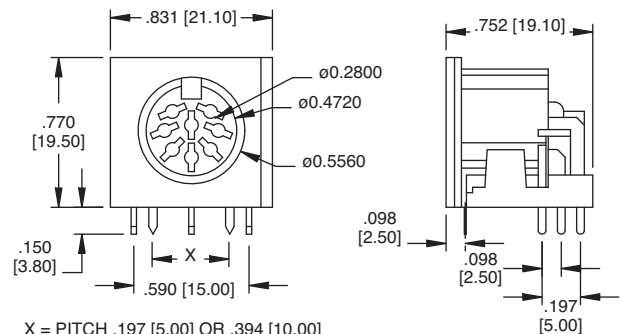

X = PITCH .197 [5.00] OR .394 [10.00]




DJ-008



Recommended PCB Layout


DIN JACK SHIELDED, POSITIONS: 3P, 4P, 6P, 7P, 8P

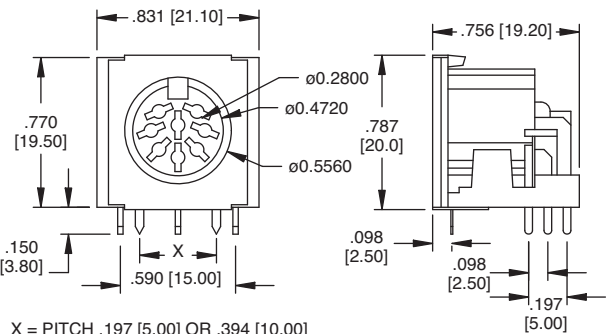

X = PITCH .197 [5.00] OR .394 [10.00]




DJ-008-S




Recommended PCB Layout

MATING FACE CONFIGURATIONS



3 Position



4 Position



5 Position



6 Position




7 Position



8 Position


DJP SERIES
PANEL MOUNT DIN JACK WITH
SOLDER EYELETS

DJP-008-A

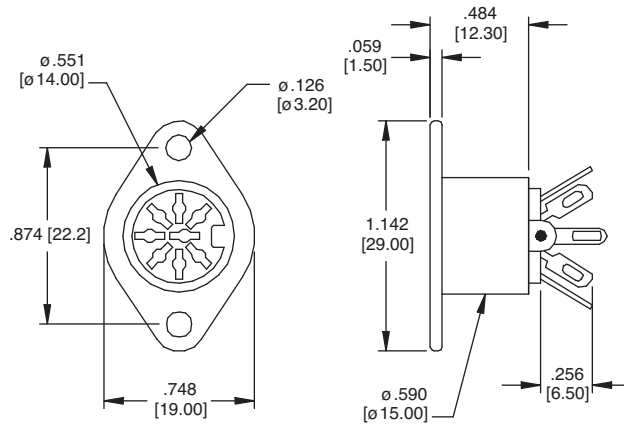

DJP SERIES
PCB MOUNT DIN JACK


DJP-008-B

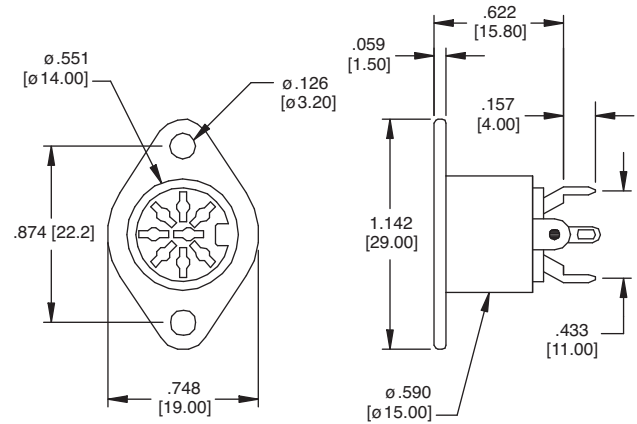

DJN SERIES
PCB MOUNT DIN JACK




DJN-005-B

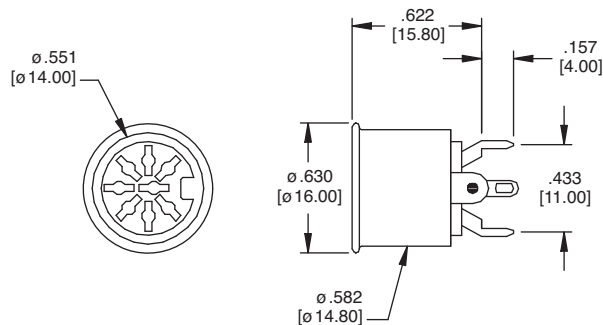


3 Position




4 Position




5 Position




6 Position




7 Position




8 Position



DJN Series (Type A)

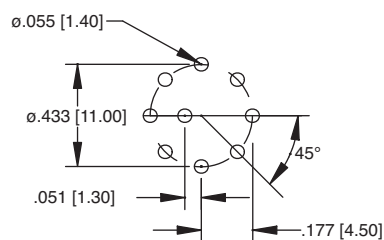

DJP Series

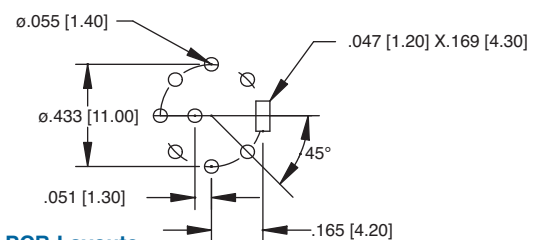

Recommended PCB Layouts