

**RCP2150M30 is LTCC Directional Coupler with Gold (Au) Plated in easy to surface mount for wireless communication, 1900~2300MHz.**


**Product Characteristics**

- **Low Loss**
- **High Reliability**
- **Good thermal management**

**Electrical Specifications**

Frequency (MHz)	Coupling (dB)	Insertion Loss (dB)	Directivity (dB)	VSWR (Max)	Power Cap. (Watts)	Temp. range (°C)
1900~2300	30 ± 1.5	0.2	18	1.2	200	-55 ~ +85

**Mechanical Outline**

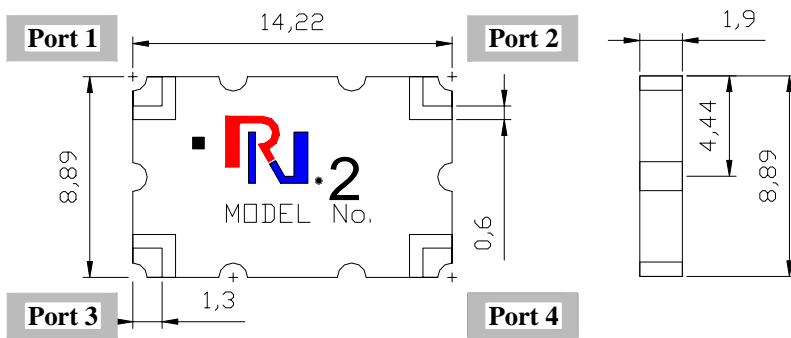

**Pin Configuration**

Port 1	Input
Port 2	Output
Port 3	Coupled
Port 4	Isolated

**Performance**

