

RoHS Compliant Product
A suffix of "-C" specifies halogen or lead -free


DESCRIPTION

The SGSC4558 is a monolithic integrated circuit designed for dual operational amplifier.


FEATURES

- No frequency compensated required
- No latch-up
- Large common mode and differential voltage range
- Parameter tracking over temperature range
- Gain and phase match between amplifiers
- Internally frequency compensated
- Low noise input transistors


PACKAGE DIMENSIONS

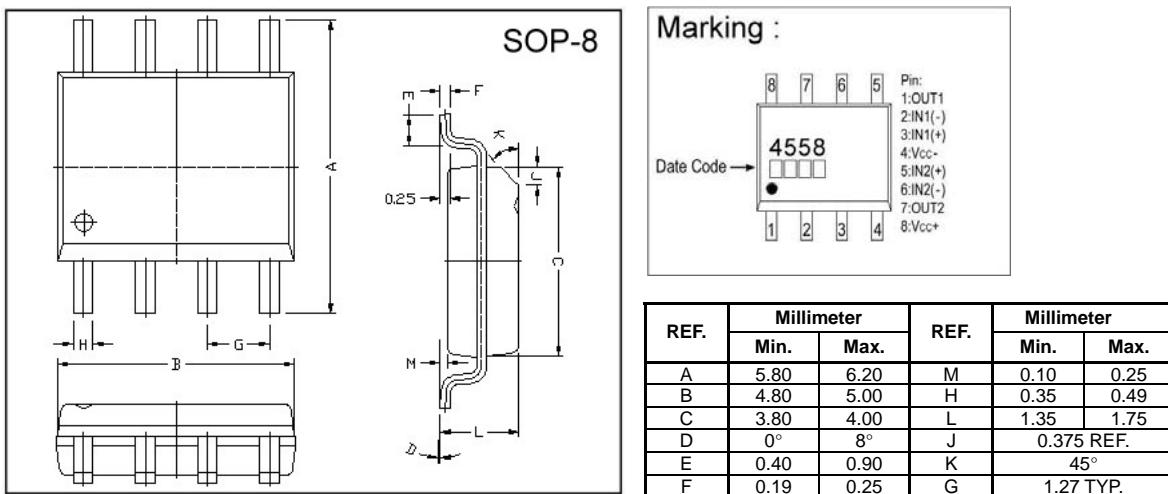

PIN CONFIGURATIONS

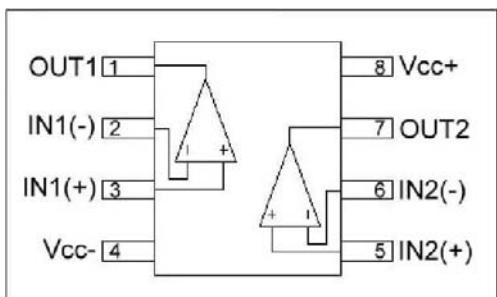

BLOCK DIAGRAMS

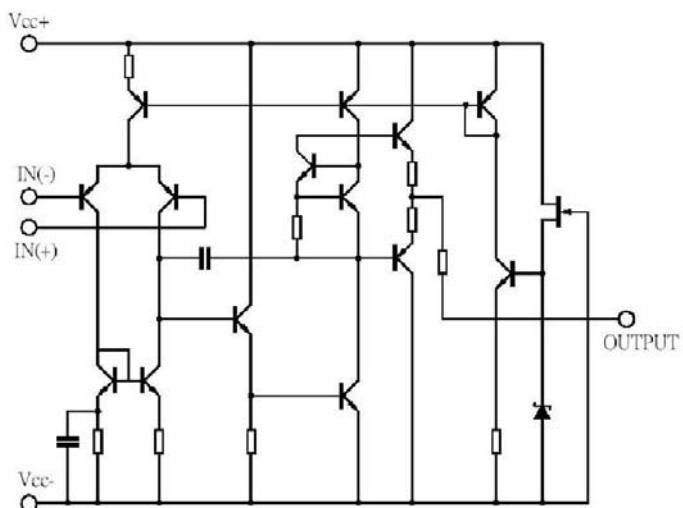

ABSOLUTE MAXIMUM RATINGS

| Parameter | Value | Units |
|---|-----------------|-------|
| Supply Voltage (V _{cc}) | ±22 | V |
| Differential Input Voltage (V _{i(DIFF)}) | ±18 | V |
| Input Voltage (V _i) | ±15 | V |
| Power Dissipation (P _D) | 400 | mW |
| Operating & Junction Temperature (T _{OPR} , T _{STG}) | 0~+70, -65~+150 | °C |

ELECTRICAL CHARACTERISTICS

(V_{cc}=15V, V_{EE}=-15V, T_A=25°C)

| Characteristics | Symbol | Min. | Typ. | Max. | Units | Test Conditions |
|----------------------------------|----------------------------------|------|-------|------|-------|--|
| Supply Current, all Amp, no load | I _{CC} | - | 2.3 | 4.5 | mA | |
| Input Offset Current | I _{IO} | - | 5 | 200 | nA | |
| Input Bias Current | I _{BIAS} | - | 30 | 500 | nA | |
| Input Offset Voltage | V _{IO} | - | 2 | 6 | mV | R _S <10kΩ |
| Output Voltage Swing | V _{O(P-P)} | - | 12 | 14 | V | R _L ≥10kΩ |
| Common Mode Input Voltage | V _{i(R)} | ±12 | ±13 | - | V | |
| Large Signal Voltage Gain | G _V | 20 | 200 | - | V/mV | V _{O(P-P)} =±10V, R _L ≤2kΩ |
| Common Mode Rejection Ratio | CMRR | 70 | 90 | - | dB | R _S ≤10kΩ |
| Supply Voltage Rejection Ratio | PSRR | 76 | 90 | - | dB | R _S ≤10kΩ |
| Power Consumption | P _C | - | 70 | 170 | mV | |
| Slew Rate | SR | 1.2 | 2.2 | - | V/us | V _i =±10V, R _L ≥2kΩ, C _L ≤100pF |
| Rise Time | T _{RIS} | - | 0.3 | - | us | V _i =±20mV, R _L ≥2kΩ, C _L ≤100pF |
| Overshoot | OS | - | 15 | - | % | V _i =±20mV, R _L ≥2kΩ, C _L ≤100pF |
| Input Resistance | R _i | 0.3 | 2 | - | MΩ | |
| Output Resistance | R _O | - | 75 | - | Ω | |
| Total Harmonic Distortion | THD | - | 0.008 | - | % | f=1kHz, A _V =20dB, R _L =2kΩ, V _O = 2V _{PP} , C _L =100pF |
| Channel Separation | V _{O1} /V _{O2} | - | 120 | - | dB | |

FREQUENCY CHARACTERISTICS

(V_{cc}=15V, V_{EE}=-15V, T_A=25°C)

| Parameter | Symbol | Min. | Typ. | Max. | Units | Test Conditions |
|----------------------|--------|------|------|------|-------|-----------------|
| Unity Gain Bandwidth | BW | 2.0 | 2.8 | - | MHz | |

CHARACTERISTIC CURVE

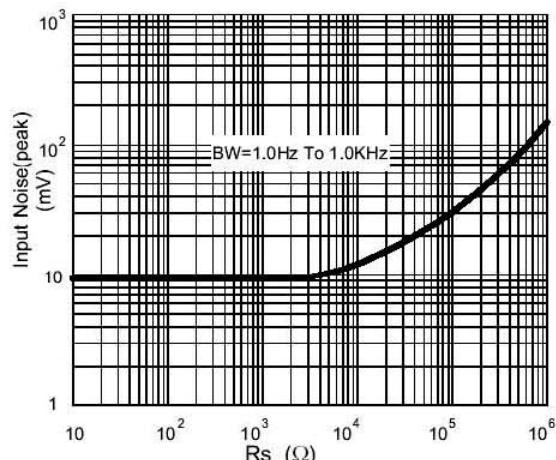


Fig 1. Burst Noise vs. R_s

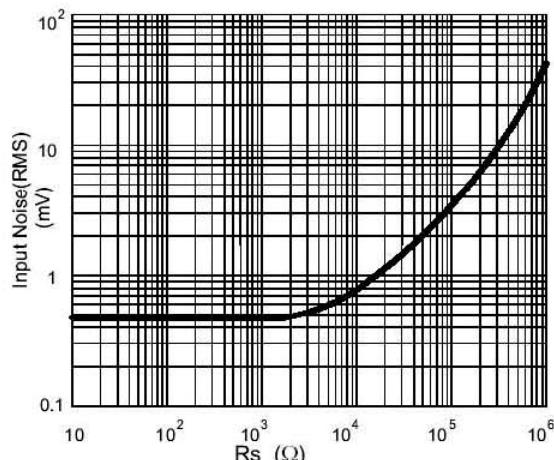


Fig 2. RMS Noise vs. R_s

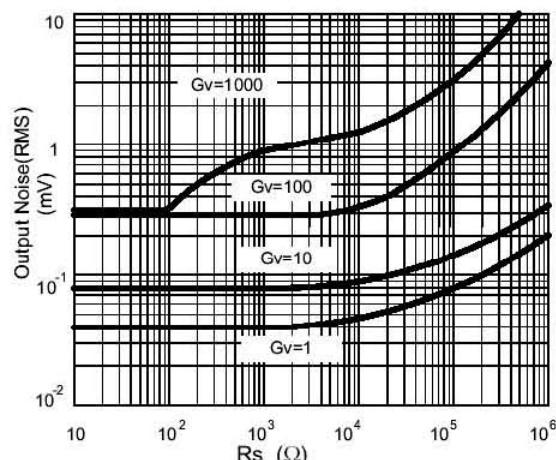


Fig 3. Output Noise vs. R_s

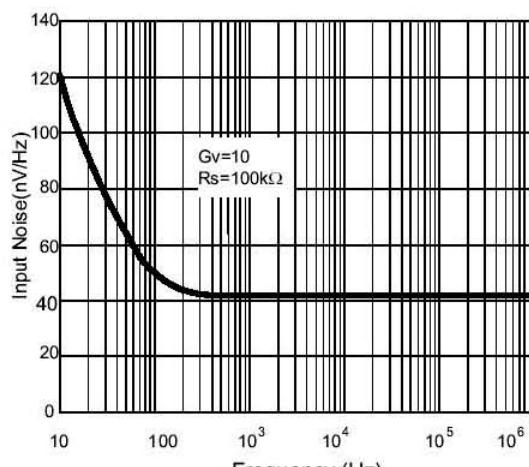


Fig 4. Spectral Noise vs. Density

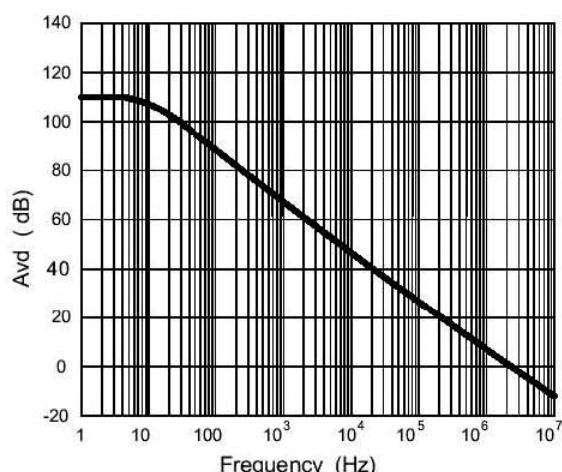


Fig 5. Open Loop Frequency Response

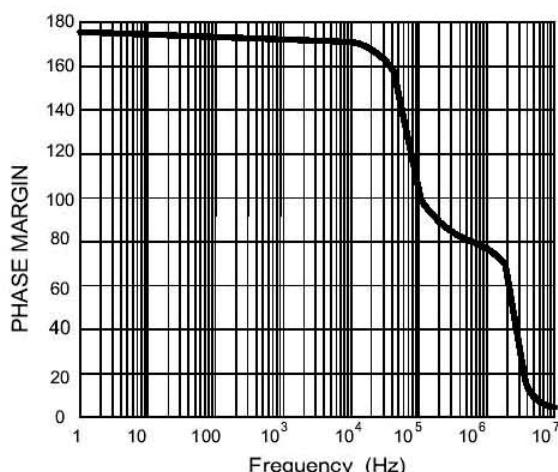


Fig 6. Phase Margin vs. Frequency

CHARACTERISTIC CURVE (cont'd)

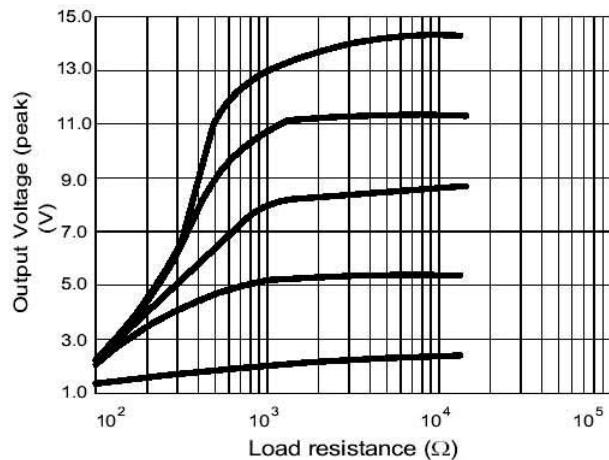


Fig 7. Positive Output Voltage Swing
vs. Load Resistance

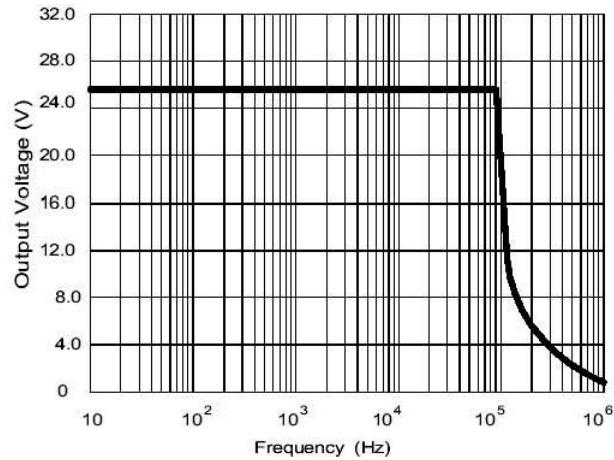


Fig 8. Power Bandwidth (Large Signal)