


Super LLD II (For PFC circuit) (current discontinuous mode)

LOW LOSS SUPER HIGH SPEED RECTIFIER


■ Outline drawings, mm

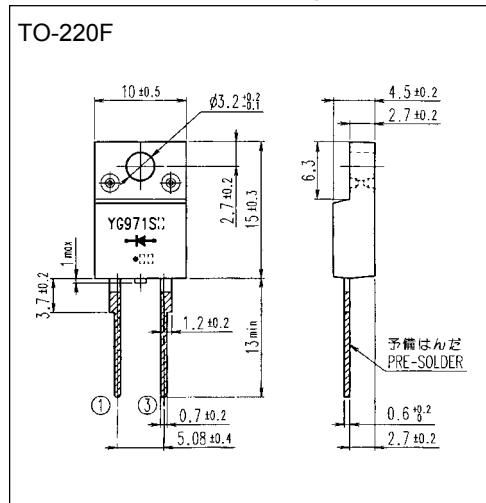

■ Features

- Insulated package by fully molding
 - Super high speed switching
 - High reliability by planer design

■ Connection diagram

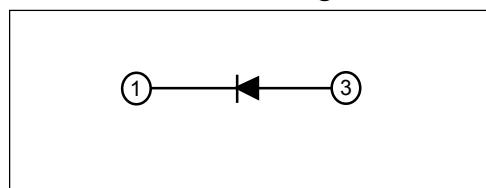

■ Applications

- PFC circuit (current continuous mode)

■ Maximum ratings and characteristics

- Maximum ratings

Item	Symbol	Conditions	Rating	Unit
Repetitive peak reverse voltage	V _{RRM}		600	V
Isolating voltage	V _{iso}	Terminals-to-Case, AC. 1min.	1500	V
Average output current	I _o	Square wave duty=1/2, T _c =89°C	8	A
Non-Repetitive surge current	I _{FSM}	Sine wave 10ms, 1shot	70	A
Operating junction temperature	T _j		150	°C
Storage temperature	T _{stg}		-40 to +150	°C

- Electrical characteristics (Ta=25°C Unless otherwise specified)

Item	Symbol	Conditions	Characteristics	Unit
Forward voltage	V_F	$I_F=8A$	Max	1.55
Reverse current	I_R	$V_R=V_{RRM}$	Max.	10.0
Reverse recovery time	t_{rr}	$I_F=0.1A, I_R=0.2A, I_{rec}=0.05A$	Max.	50.0
Thermal resistance	$R_{th(j-c)}$	Junction to case	Max.	4.5
				$^{\circ}C/W$

- Mechanical characteristics

Mouunting torque	Recommended torque	0.3 to 0.5	N·m
Approximate mass		2.0	g

■ Characteristics

