

AN6609N, AN6609NS

DC Motor Forward/Reverse Dual Speed Electronic Governor

Overview

The AN6609N and AN6609NS are the electronic governor ICs which incorporate the forward/reverse rotation and double speed controls of the DC motors used for radio/cassette tape recorder, and the functions such as fast forward, rewind, brake, and pause. They are also available for controlling the video tape deck mechanisms such as the VCRs and DATs.


The AN6609N and AN6609NS are identical with each other except the operating logic by 3-bit input.

Features


- Operating supply voltage range : $V_{CC}=8V$ to $16V$
- Stable reference voltage ($1.27V$) and easy speed adjustment
- Large starting torque and maximum control torque
- Built-in power transistor
- High-density mounting allowed by the SO package
- Forward/reverse constant speed and double speed controls, and fast forward, brake, and pause functions available by 3-bit input

Applications

VCRs, cassette decks, radio/cassette tape recorders, car cassette tape players, tape loading DC motor control such as DATs

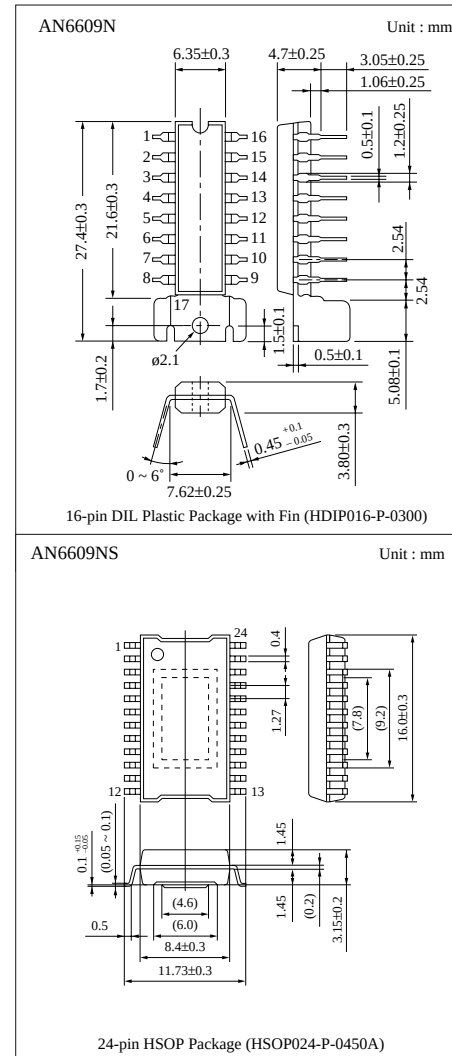

Block Diagram

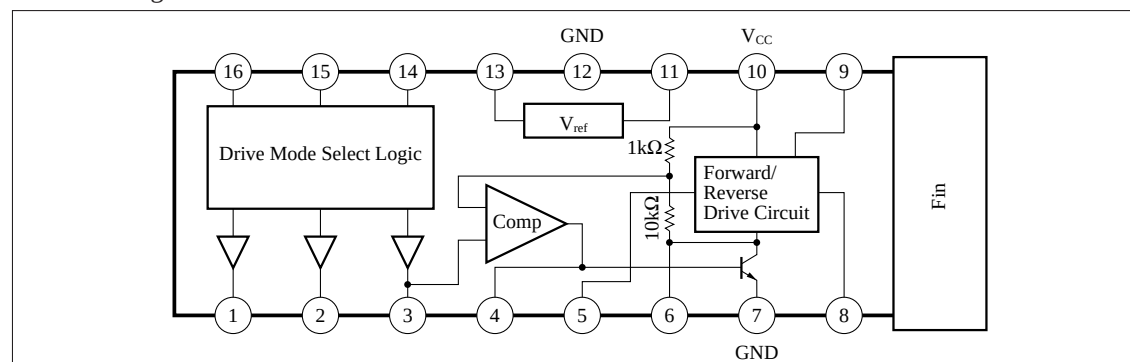

■ Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Supply voltage	V _{CC}	18	V
Supply current	I _{CC}	1800 ^{Note 1)}	mA
Power dissipation	P _D	2 ^{Note 2)}	W
Operating ambient temperature	T _{opr}	−20 to + 70	°C
Storage temperature	T _{stg}	−50 to + 150	°C

Note 1) $t \leq 200\text{ms}$

Note 2) Mounting on PCB (20mm × 20mm of copperfoil is used for heat sink)


■ Recommended Operating Range (Ta=25°C)

Parameter	Symbol	Range
Operating supply voltage range	V _{CC}	8V to 16V

■ Electrical Characteristics (Ta=25°C)

Parameter	Symbol	Condition	min	typ	max	Unit
Bias current at no load	I_{bias}	$V_{\text{CC}}=12\text{V}$	—	7	15	mA
Reference voltage	V_{ref}	$V_{\text{CC}}=12\text{V}$	1.15	1.27	1.4	V
Rated load start voltage	$V_{\text{CC(s)}}$	Supply voltage with which a motor starts rotating	6.5	—	—	V
Rated r.p.m.	N_{L}	$V_{\text{CC}}=12\text{V}$, $N=1600\text{rpm}$	−8.75	—	8.75	%
R.p.m. characteristics on load change	DN_{L}	$V_{\text{CC}}=8\text{V}$, $I_{\text{L}}=55\text{mA}$ to 120mA	−100	—	100	rpm
R.p.m. characteristics on voltage change	DN_{U}	$V_{\text{CC}}=8\text{V}$ to 16V , $N=1600\text{rpm}$	−22	0	22	rpm
Double speed forward/reverse r.p.m. difference	DN_{Logi}	$V_{\text{CC}}=12\text{V}$, $N=3200\text{rpm}$	−3	0	3	%
Output saturation voltage 1	$V_{\text{sat (1)}}$	$V_{\text{CC}}=8\text{V}$, $I_{\text{O}}=1\text{A}$	—	—	2	V
Output saturation voltage 2	$V_{\text{sat (2)}}$	$V_{\text{CC}}=8\text{V}$, $I_{\text{O}}=1\text{A}$	—	—	1.5	V
R.p.m. characteristics on temperature change	DN_{A}	$V_{\text{CC}}=12\text{V}$, $T_{\text{a}}=-10^{\circ}\text{C}$ to $+60^{\circ}\text{C}$	—	100	—	ppm/ $^{\circ}\text{C}$
R.p.m. drift characteristics by time	DN_{T}	$V_{\text{CC}}=12\text{V}$, $t=15\text{s}$ to 10ms	—	0.4	—	%

■ Application Circuit

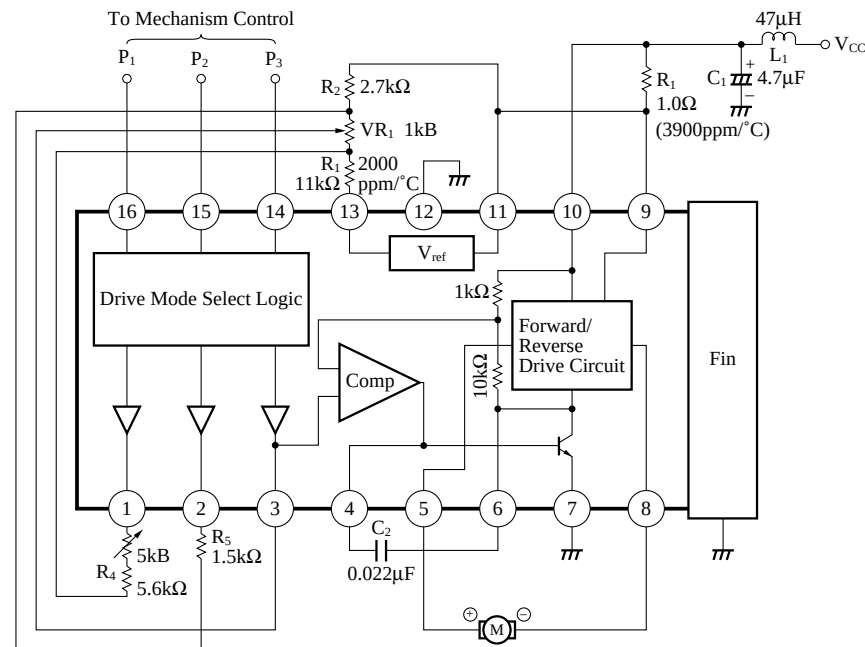

Request for your special attention and precautions in using the technical information and semiconductors described in this material

- (1) An export permit needs to be obtained from the competent authorities of the Japanese Government if any of the products or technologies described in this material and controlled under the "Foreign Exchange and Foreign Trade Law" is to be exported or taken out of Japan.
- (2) The technical information described in this material is limited to showing representative characteristics and applied circuit examples of the products. It does not constitute the warranting of industrial property, the granting of relative rights, or the granting of any license.
- (3) The products described in this material are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this material are subject to change without notice for reasons of modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the guaranteed values, in particular those of maximum rating, the range of operating power supply voltage and heat radiation characteristics. Otherwise, we will not be liable for any defect which may arise later in your equipment.
Even when the products are used within the guaranteed values, redundant design is recommended, so that such equipment may not violate relevant laws or regulations because of the function of our products.
- (6) When using products for which dry packing is required, observe the conditions (including shelf life and after-unpacking standby time) agreed upon when specification sheets are individually exchanged.
- (7) No part of this material may be reprinted or reproduced by any means without written permission from our company.

Please read the following notes before using the datasheets

- A. These materials are intended as a reference to assist customers with the selection of Panasonic semiconductor products best suited to their applications.
Due to modification or other reasons, any information contained in this material, such as available product types, technical data, and so on, is subject to change without notice.
Customers are advised to contact our semiconductor sales office and obtain the latest information before starting precise technical research and/or purchasing activities.
- B. Panasonic is endeavoring to continually improve the quality and reliability of these materials but there is always the possibility that further rectifications will be required in the future. Therefore, Panasonic will not assume any liability for any damages arising from any errors etc. that may appear in this material.
- C. These materials are solely intended for a customer's individual use.
Therefore, without the prior written approval of Panasonic, any other use such as reproducing, selling, or distributing this material to a third party, via the Internet or in any other way, is prohibited.