

General Description:

The Durel® D356A Lamp Driver is part of a family of switch-mode IC drivers intended to reduce EL system cost, improve performance and to simplify the design, specification, and manufacture of EL backlighting systems. This driver is intended to provide adequate power for most watches, data banks and cellular phone backlighting applications.

Data Sheet D356A Electroluminescent Lamp Driver IC



MSOP-8

Features

- High Efficiency
- Small Package Size
- Low Voltage Operation
- Adjustable Output Frequency
- High AC Voltage Output
- Drives up to 20in² EL Lamps

Applications


- Watches
- Cellular / PHS Phones
- Pagers
- Data Banks
- LCD Backlighting

Lamp Driver Specifications:


(V₊=3.0V, CLF=5.0nF, L=1.8mH/3Ω, E=3.0V, Load B*, T_a=25°C, unless otherwise specified)

Parameter	Symbol	Minimum	Typical	Maximum	Unit	Conditions
Supply Current	I		23	30	mA	
Standby Current			10	1000	nA	E = GND
Enable Current			50	75	μA	E = 3.0V
Enable Voltage On	E	0.9			V	
Enable Voltage Off				0.3	V	
Lamp Frequency	LF	230	310	390	Hz	
Output Voltage	VOUT	110	135		V _{pp}	

* Load B

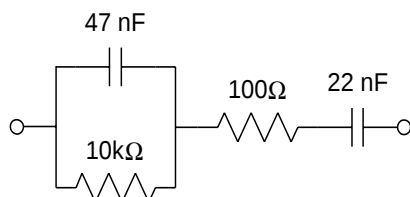

Typical Waveform

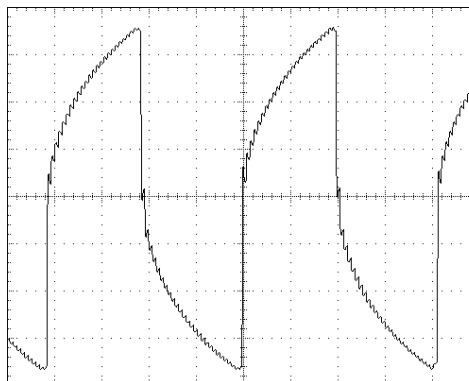

Absolute Maximum Ratings:

Parameter	Symbol	Minimum	Maximum	Unit	Comments
Supply voltage				V	
Operating range	V+	1.0	7.0		
Withstand range		-0.5	10.0		
Output Voltage	Vout		220	V _{pp}	Peak to peak voltage
Enable voltage	E	-0.5	7.0	V	
Operating temperature	T _a	-40	85	°C	
Storage temperature	T _s	-65	150	°C	
Solder Temperature		245	300	°C	5 second soak


Note: The absolute maximum ratings are stress ratings only. Functional operation of the device at these ratings or any other conditions above those indicated in the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect life of lamp or driver.

Physical Data:


Pad Center Locations			MSOP Pin-outs	Function
Name	X _{μm}	Y _{μm}		
GND	-292	-497	1	Power Ground
L-	505	-497	2	Negative power connection to inductor
VOUT	647	-275	3	Output voltage to EL lamp
L+	647	8	4	Positive power connection to inductor
V+	647	178	5	System power input
CLF1	655	339	6	Capacitor input to low frequency oscillator
CLF2	461	342	7	Capacitor input to low frequency oscillator
E	-569	327	8	System enable

Notes:

1. Dimensions are in microns, unless otherwise noted.
2. Bond pads are typically 100 x 100.
3. Die thickness is 330 +/- 25 (13 +/- 1 mil).
4. Pad center coordinates are relative to origin on center of die.
5. Die size is 1170 x 1560.
6. Base of die should be grounded.

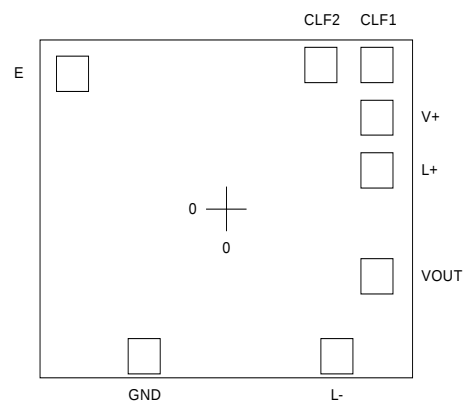

Block Diagram of the Inverter Circuitry:

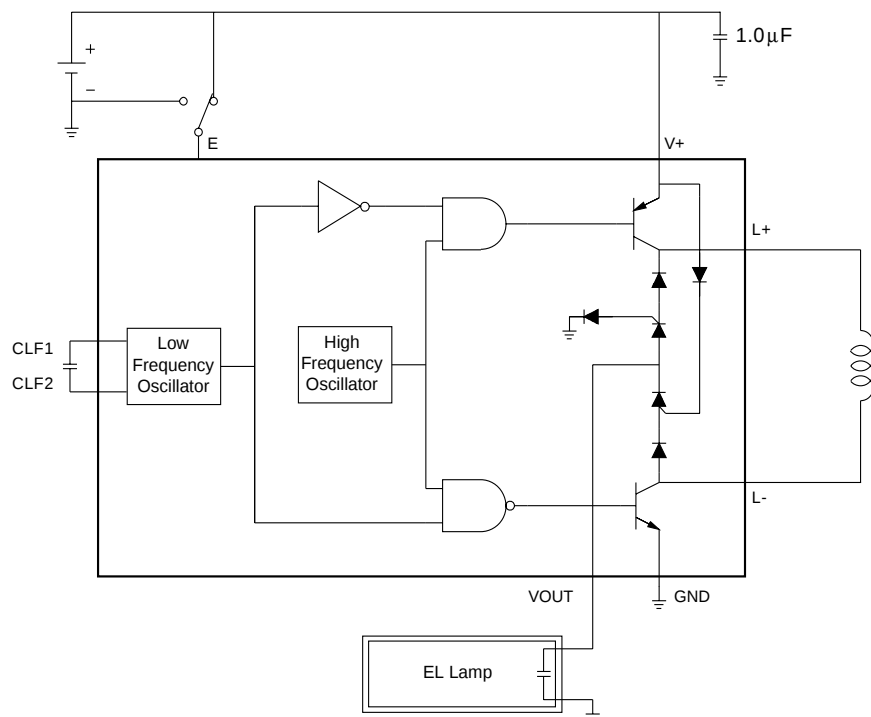


Typical D356A EL Driver Configuration:

1.5 V Analog Watch

Typical Output


Brightness = 2.6 fL (8.9 Cd/m²)
 Lamp Frequency = 220 Hz
 Supply Current = 11mA
 V_{pp} = 160
 Load = 1in² Durel 3 Blue-green EL

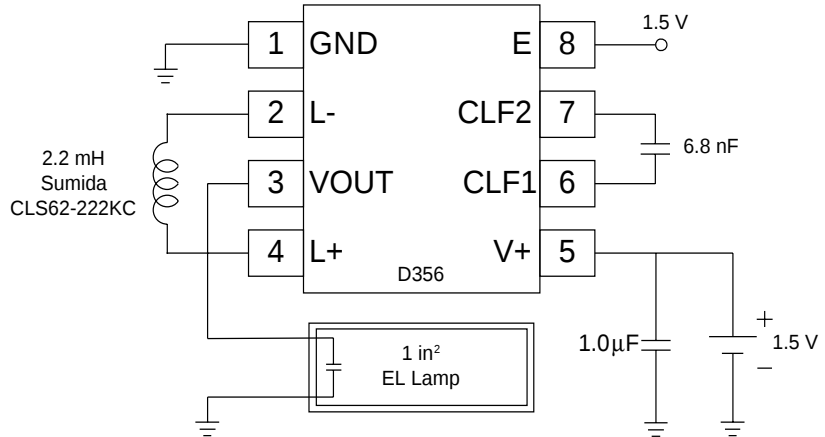

3.0 V Cellular LCD/Digital Watch

Typical Output

Brightness = 7.5 fL (25.6 Cd/m²)
 Lamp Frequency = 475 Hz
 Supply Current = 13mA
 V_{pp} = 200
 Load = 1in² Durel 3 Blue-green EL

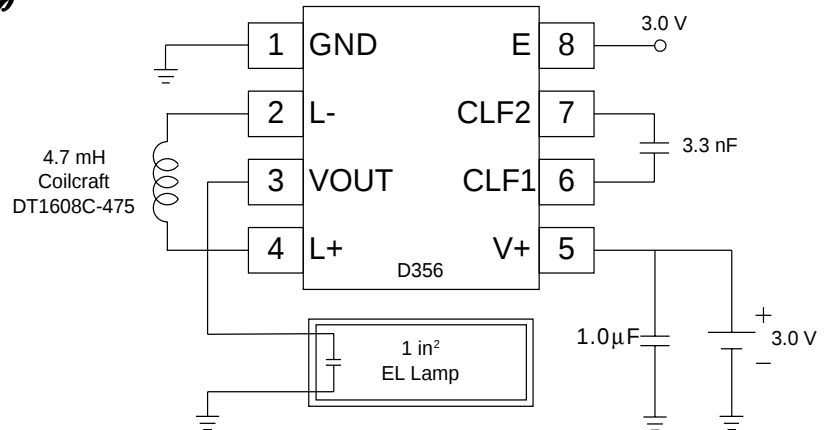


5.0 V PDA

Typical Output

Brightness = 6.1fL (20.8 Cd/m²)
 Lamp Frequency = 360 Hz
 Supply Current = 18mA
 V_{pp} = 190
 Load = 4in² Durel 3 Blue-green EL

A 100Ω resistor in series with the lamp may be necessary to reduce electrical noise.

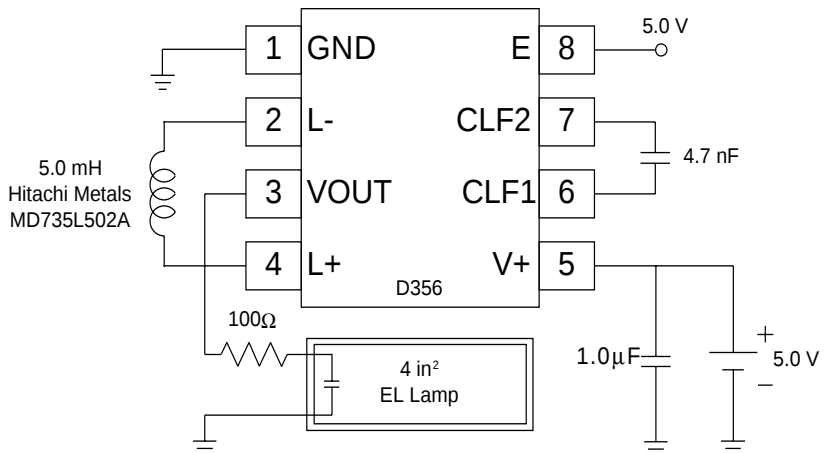


Ordering Information:

The D356A inverter is available as bare die in probed wafer form or in die trays, and in a standard MSOP-8 plastic package per tube or per tape and reel. A Durel D356A Designer's Kit is available for evaluating and identifying the optimum component values for your application.


Description	MSOP-8					
	Min.		Typical		Max.	
	mm.	in.	mm.	in.	mm.	in.
A	0.94	0.037	1.02	0.040	1.09	0.043
A1	0.05	0.002	0.10	0.004	0.15	0.006
b	0.20	0.008	0.33	0.013	0.46	0.018
D1	2.84	0.112	3.00	0.118	3.15	0.124
e	0.43	0.017	0.65	0.026	0.83	0.033
E	4.70	0.185	4.90	0.193	5.11	0.201
E1	2.84	0.112	3.00	0.118	3.25	0.128

MSOPs are marked with direct logo part number (356A) and wafer lot number. Marking orientation is bottom closest to pin 1 side.

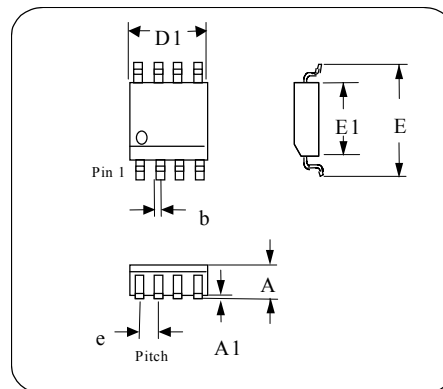


MSOPs in Tubes: 1DDD356AA-M01

Tube-length = 320 mm (12.6 in). 100 units per tube.




MSOPs in Tape & Reel: 1DDD356AA-M02

Embossed tape on 360 mm diameter reel per EIA-481-2. 2500 units per reel. Quantity marked on reel label.

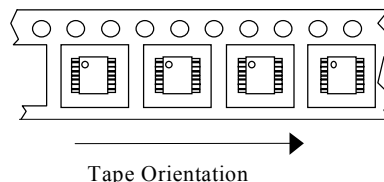

Die in Trays: 1DDD356AA-B02

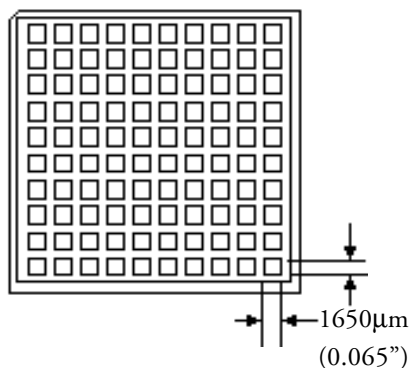

- Die tray size: 2 inch square
- Total number of pockets: 100
- Pocket depth: 610µm (0.024")

ISO 9001 Certified

DUREL Corporation

2225 W. Chandler Blvd.
Chandler, AZ 85224-6155
Tel: (480) 917-6000
FAX: (480) 917-6049
Website: <http://www.durel.com>

*The DUREL name and logo are registered trademarks of DUREL CORPORATION.
The D356A inverter is covered by US patent #5,313,141. Corresponding foreign patents are issued and pending.
This information is not intended to and does not create any warranties, express or implied, including any warranty of merchantability or fitness for a particular purpose. The relative merits of materials for a specific application should be determined by your evaluation.*