





## Product Description

Sirenza Microdevices' SGC-2486Z is a high performance SiGe HBT MMIC amplifier utilizing a Darlington configuration with a patented active bias network. The active bias network provides stable current over temperature and process Beta variations. Designed to run directly from a 3V supply, the SGC-2486Z does not require a dropping resistor as compared to typical Darlington amplifiers. The SGC-2486Z is designed for high linearity 3V gain block applications that require small size and minimal external components. It is internally matched to 50 ohms.

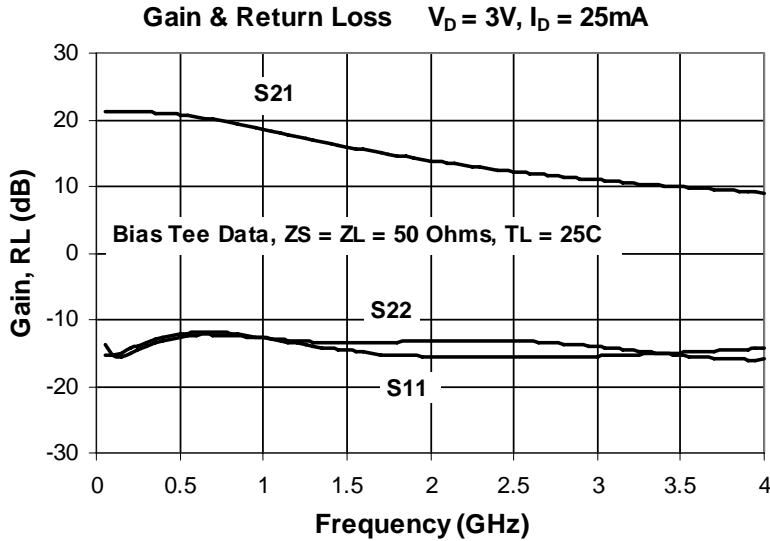

# SGC-2486Z

## 50-4000 MHz Active Bias Silicon Germanium Cascadable Gain Block



### Product Features

- Single Fixed 3V Supply
- No Dropping Resistor Required
- Patented Self-Bias Circuitry
- $P_{1dB} = 10.8 \text{ dBm}$  at 1950 MHz
- $OIP_3 = 23.5 \text{ dBm}$  at 1950 MHz
- Robust 100V ESD, Class 1C HBM

### Applications

- PA Driver Amplifier
- Cellular, PCS, GSM, UMTS, WCDMA
- IF Amplifier
- Wireless Data, Satellite

Symbol	Parameters	Units	Frequency	Min.	Typ.	Max.
G	Small Signal Gain	dB	850 MHz	18.4	19.9	21.4
			1950 MHz	13.1	14.6	16.1
			2400 MHz		12.3	
$P_{1dB}$	Output Power at 1dB Compression	dBm	850 MHz		10.5	
			1950 MHz	9.8	10.8	
			2400 MHz		10.1	
$OIP_3$	Output Third Order Intercept Point	dBm	850 MHz		23.0	
			1950 MHz	21.5	23.5	
			2400 MHz		25.0	
IRL	Input Return Loss	dB	1950 MHz	11.0	15.0	
ORL	Output Return Loss	dB	1950 MHz	9.5	13.5	
NF	Noise Figure	dB	1930 MHz		3.3	4.3
$V_D$	Device Operating Voltage	V			3	
$I_D$	Device Operating Current	mA		21	25	29
$R_{th, j-l}$	Thermal Resistance (junction to lead)	$^{\circ}C/W$			205	
<b>Test Conditions:</b> $V_D = 3.0V$ $I_D = 25mA$ Typ. $T_L = 25^{\circ}C$ $OIP_3$ Tone Spacing = 1MHz						
Bias Tee Data $Z_S = Z_L = 50 \text{ Ohms}$ $T_L = 25^{\circ}C$ Pout per tone = -5 dBm						

The information provided herein is believed to be reliable at press time. Sirenza Microdevices assumes no responsibility for inaccuracies or omissions. Sirenza Microdevices assumes no responsibility for the use of this information, and all such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. Sirenza Microdevices does not authorize or warrant any Sirenza Microdevices product for use in life-support devices and/or systems. Copyright 2007 Sirenza Microdevices, Inc.. All worldwide rights reserved.


**Typical RF Performance at Key Operating Frequencies (Bias Tee)**

Symbol	Parameter	Unit	Frequency (MHz)					
			100	500	850	1950	2400	3500
G	Small Signal Gain	dB	21.5	21.0	19.9	14.6	12.3	9.6
OIP <sub>3</sub>	Output Third Order Intercept Point	dBm	22.0	22.5	23.0	23.5	25.0	23.0
P <sub>1dB</sub>	Output Power at 1dB Compression	dBm	13.4	10.7	10.5	10.8	10.1	8.8
IRL	Input Return Loss	dB	14.5	11.5	12.5	15.0	16.5	15.0
ORL	Output Return Loss	dB	14.5	12.0	12.5	13.5	14.0	14.0
S <sub>12</sub>	Reverse Isolation	dB	23.5	25.0	24.5	20.0	19.0	17.5
NF	Noise Figure	dB	2.8	2.8	3.1	3.3	3.6	4.4


**Test Conditions:** V<sub>D</sub> = 3V I<sub>D</sub> = 25mA OIP<sub>3</sub> Tone Spacing = 1MHz, Pout per tone = -5 dBm  
 T<sub>L</sub> = 25°C Z<sub>S</sub> = Z<sub>L</sub> = 50 Ohms

**Typical Performance with Bias Tee, V<sub>D</sub> = 3V, I<sub>D</sub> = 25mA**

**OIP3 vs. Frequency (-5dBm/tone, 1MHz spacing)**

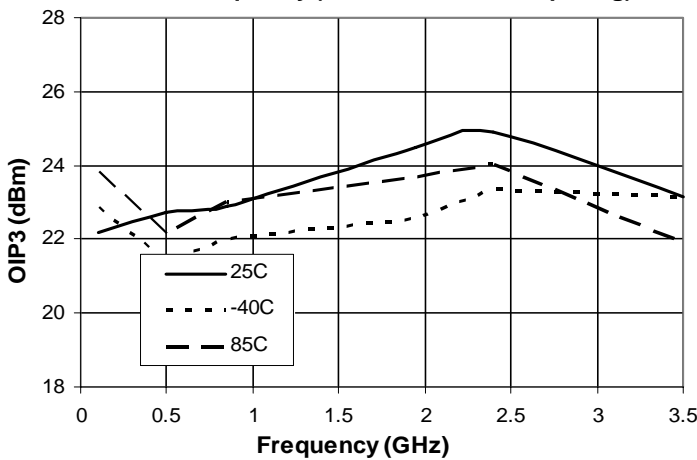

**P1dB vs. Frequency**

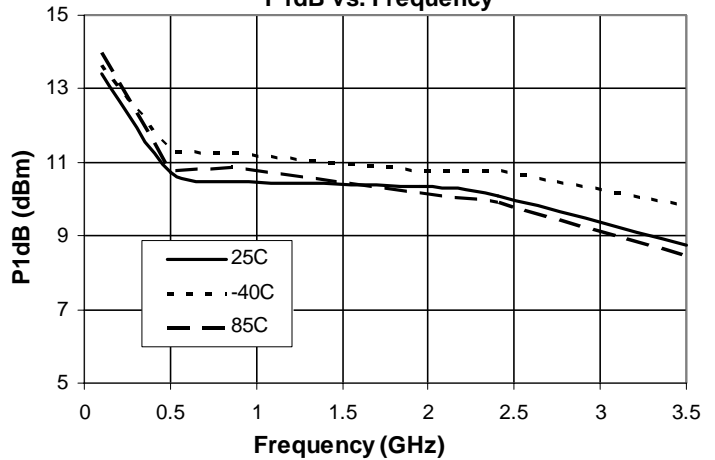

**Absolute Maximum Ratings**

Parameter	Absolute Limit
Max Device Current (I <sub>CE</sub> )	55 mA
Max Device Voltage (V <sub>CE</sub> )	4.5 V
Max. RF Input Power* (See Note)	+18 dBm
Max. Junction Temp. (T <sub>J</sub> )	+150°C
Operating Temp. Range (T <sub>L</sub> )	-40°C to +85°C
Max. Storage Temp.	+150°C

\*Note: Load condition, Z<sub>L</sub> = 50 Ohms

Operation of this device beyond any one of these limits may cause permanent damage. For reliable continuous operation, the device voltage and current must not exceed the maximum operating values specified in the table on page one.

Bias Conditions should also satisfy the following expression:

$$I_D V_D < (T_J - T_L) / R_{TH}, \text{ j-l } \quad T_L = T_{LEAD}$$

**Reliability & Qualification Information**

Parameter	Rating
ESD Rating - Human Body Model (HBM)	Class 1C
Moisture Sensitivity Level	MSL 1







This product qualification report can be downloaded at [www.sirenza.com](http://www.sirenza.com)




**Caution: ESD sensitive**


Appropriate precautions in handling, packaging and testing devices must be observed.

Typical Performance with Bias Tee,  $V_D = 3V$ ,  $I_D = 25mA$

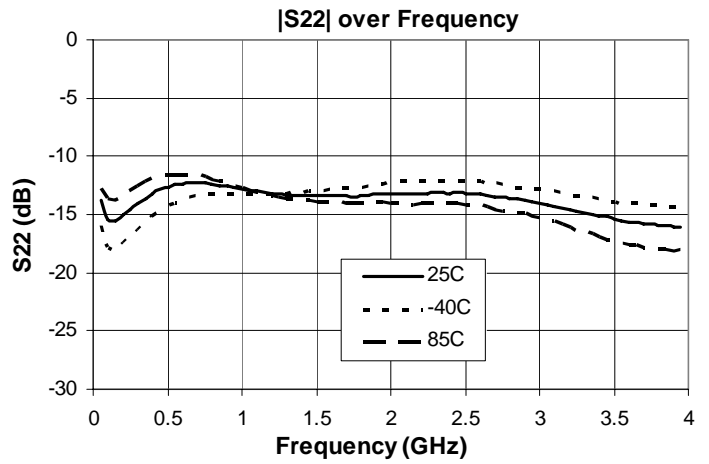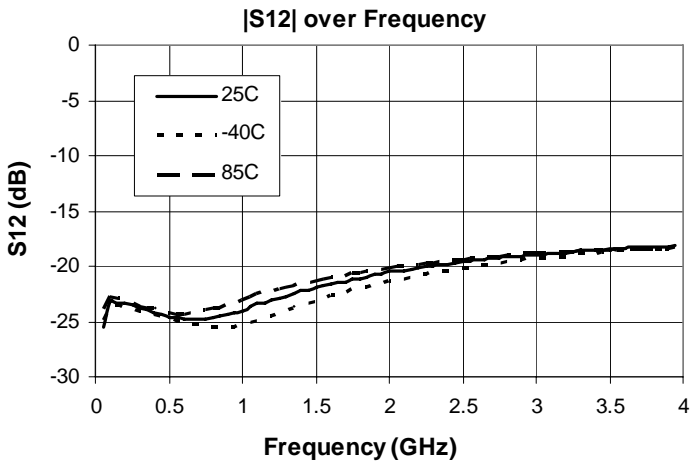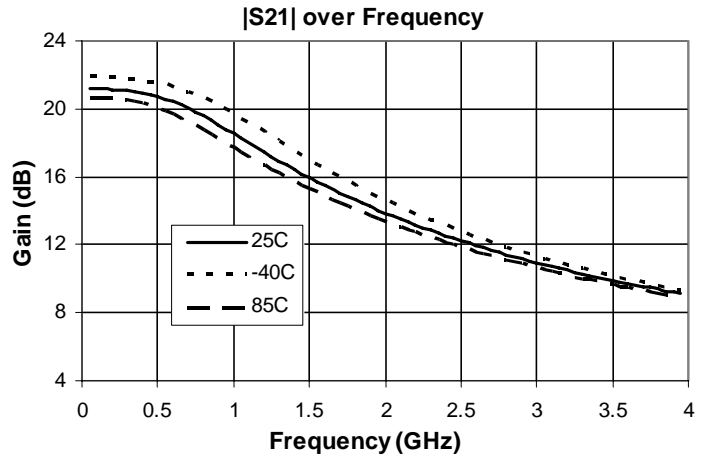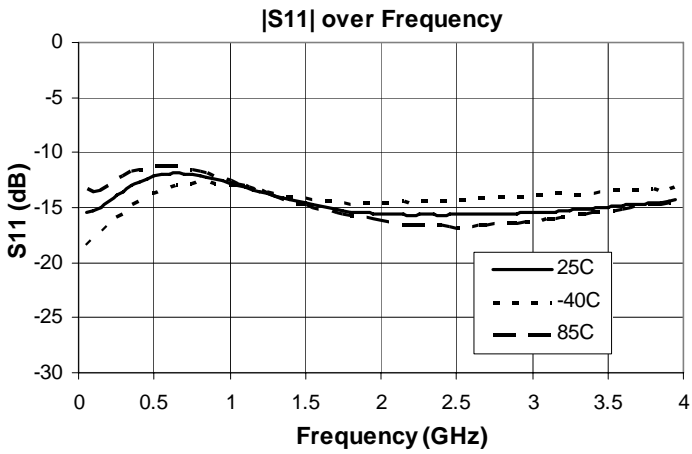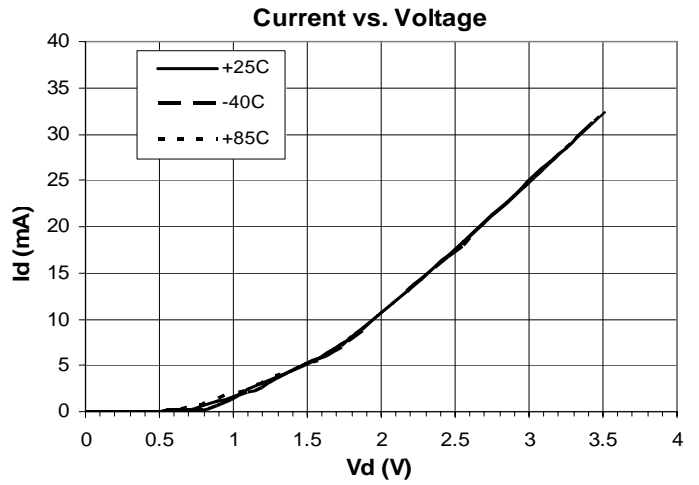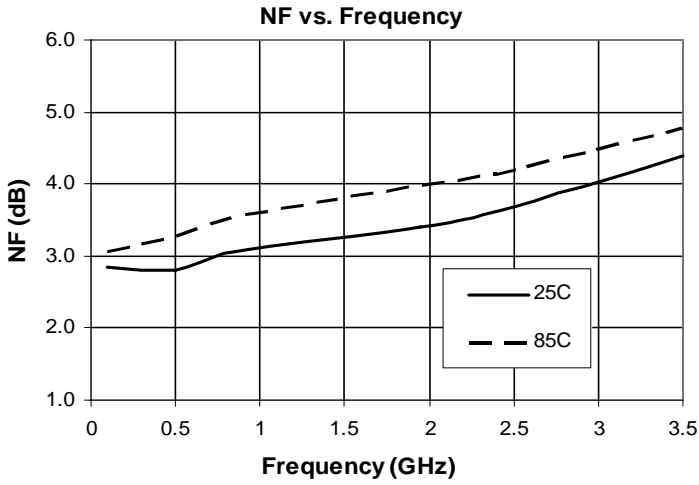


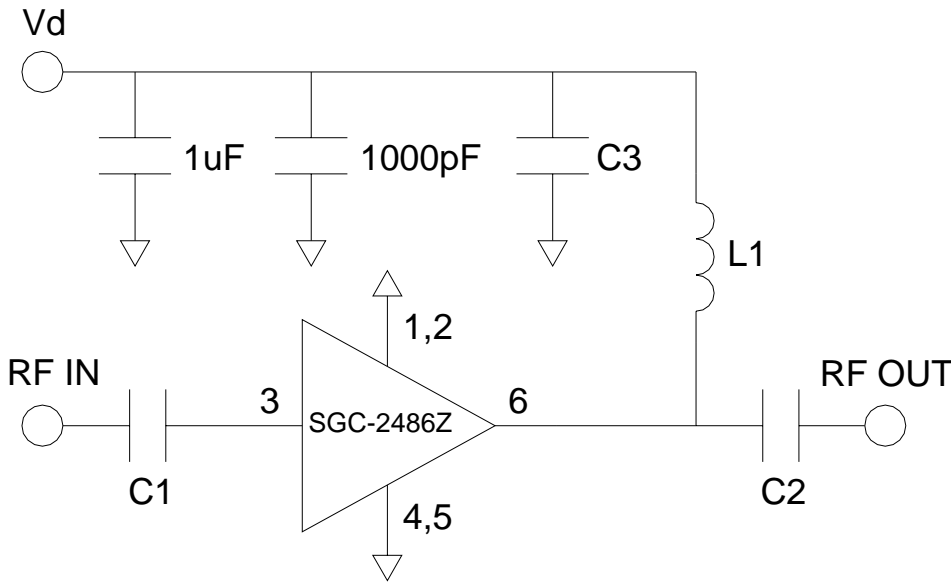

Application Circuit Element Values		
Reference Designator	100-2000MHz	2000-4000MHz
C1	1000pF	2.7pF
C2	100pF	6.8pF
C3	100pF	6.8pF
L1	150nH	39nH

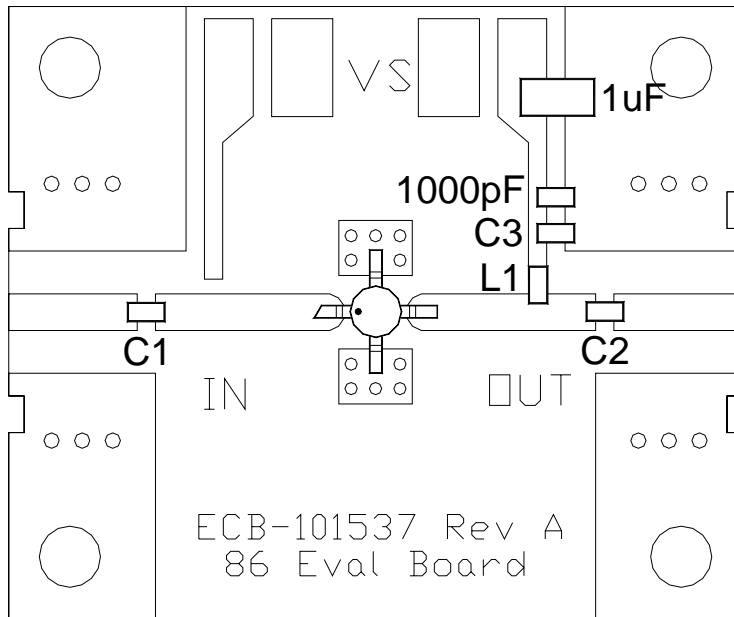

Part Identification Marking & Pinout




Pin #	Function	Description
1	RF IN	RF input pin. This pin requires the use of an external DC blocking capacitor chosen for the frequency of operation
2,4	GND	Connection to ground. Use via holes as close to the device ground leads as possible to reduce ground inductance and achieve optimum RF performance
3	RF OUT / DC BIAS	RF output and bias pin. This pin requires the use of an external DC blocking capacitor chosen for the frequency of operation.

Part / Evaluation Board Ordering Information			
Part Number	Description	Reel Size	Devices / Reel
SGC-2486Z	Lead Free, RoHs Compliant	13"	3000
SGC-2486Z-EVB1	100-2000 MHz Evaluation Board	N/A	N/A
SGC-2486Z-EVB2	2000-4000 MHz Evaluation Board	N/A	N/A

**86 PCB Pad Layout**

Dimensions in inches [millimeters]

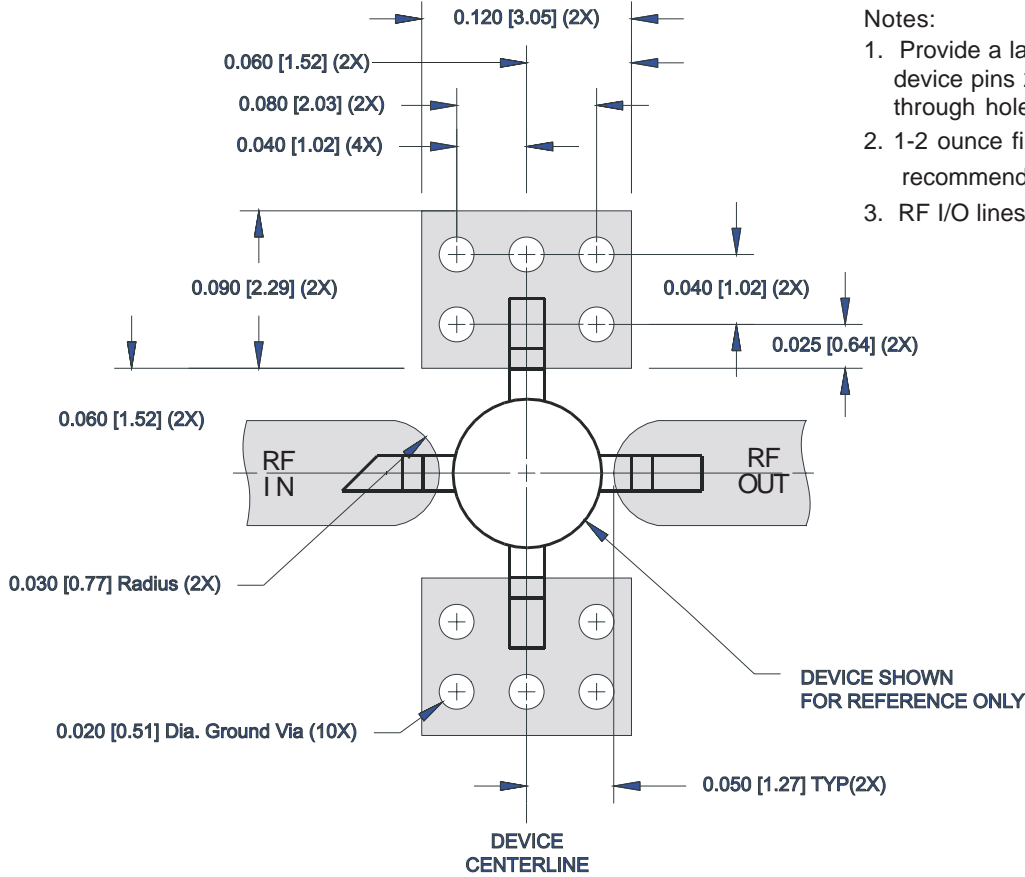

Notes:

1. Provide a large ground pad area under device pins 2 and 4 with several plated-through holes placed as shown.
2. 1-2 ounce finished copper thickness is recommended.
3. RF I/O lines are 50Ω

**86 Nominal Package Dimensions**

Dimensions in inches [millimeters]

A link to the 86 package outline drawing with full dimensions and tolerances may be found on the product web page at [www.sirenza.com](http://www.sirenza.com).

