


## SCHOTTKY BARRIER DIODE

### ■ Outline drawings, mm

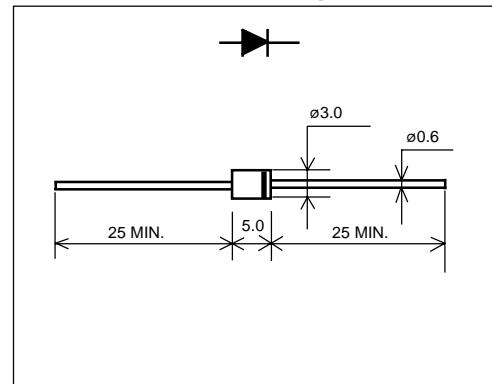


### ■ Features

- Low VF
- Super high speed switching
- High reliability by planer design

### ■ Applications

- High speed switching

### ■ Marking

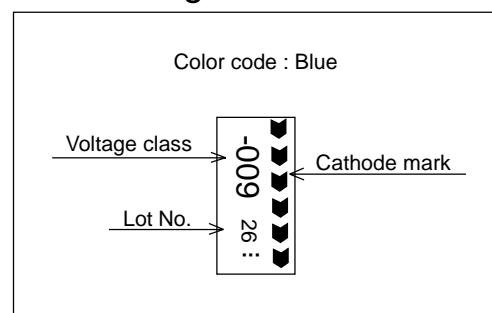

### ■ Maximum ratings and characteristics

- Absolute maximum ratings

Item	Symbol	Conditions	Rating	Unit
Repetitive peak reverse voltage	V <sub>RRM</sub>		90	V
Average forward current	I <sub>F(AV)</sub>	Square wave, duty=1/2 Ta=25°C	1.0*	A
Surge current	I <sub>FSM</sub>	Sine wave 10ms	30	A
Operating junction temperature	T <sub>j</sub>		-40 to +150	°C
Storage temperature	T <sub>stg</sub>		-40 to +150	°C


\*:P.C board mounting (land 10x10mm)

- Electrical characteristics (Ta=25°C Unless otherwise specified )


Item	Symbol	Conditions	Max.	Unit
Forward voltage drop	V <sub>FM</sub>	I <sub>FM</sub> =1.0A	0.9	V
Reverse current	I <sub>RRM</sub>	V <sub>R</sub> =V <sub>RRM</sub>	1.0	mA

## ■ Characteristics


Forward Characteristic (typ.)

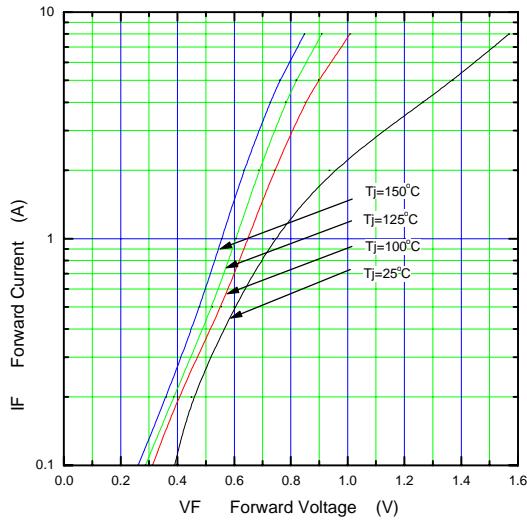


Reverse Characteristic (typ.)

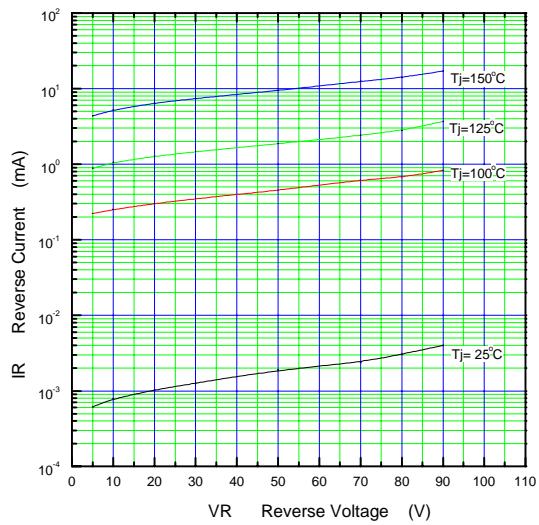


Forward Power Dissipation

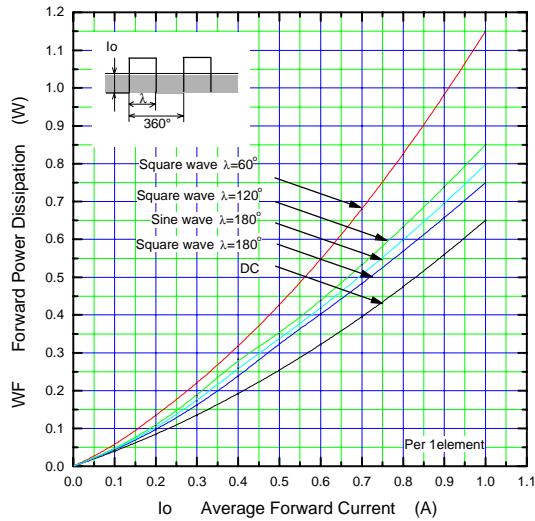

Reverse Power Dissipation

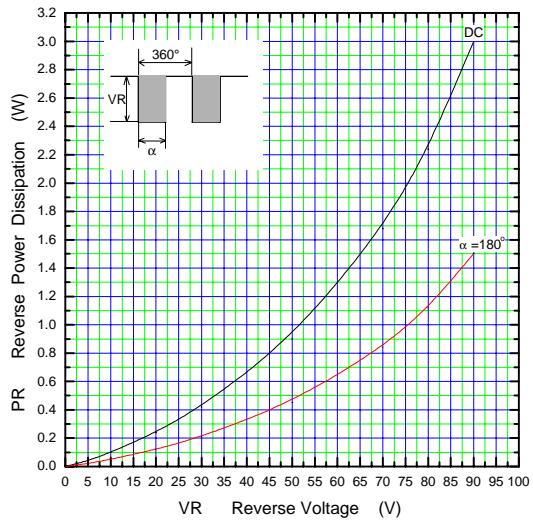

Current Derating (Io-Ta)

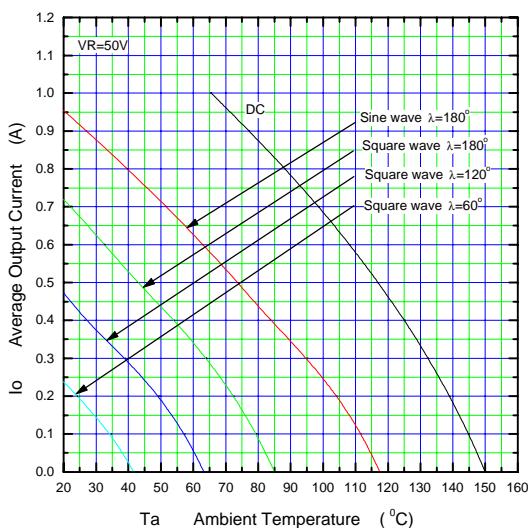

Current Derating (Io-Tl)

