
21052 Specifications

This chapter describes the mechanical and electrical specifications of the 21052.

7.1 Mechanical Specifications

The following sections describe the mechanical specifications of the 21052.

7.1.1 21052 Package

The 21052 is packaged in a 160-pin PQFP. Table 7–1 lists the mechanical specifications, and Figure 7–1 shows the package dimensions of the 21052.

Table 7–1 Lead Counts and Dimensional Attributes


Symbol	Limit	Dimensions in Millimeters
LL	REF	1.6
e	BSC	0.65
L	MIN	0.65
L	MAX	1.03
A	MAX	4.5
A1	MIN	0.25
A2	MIN	3.17
A2	MAX	3.67
b	MIN	0.22
b	MAX	0.38
c	MIN	0.12
c	MAX	0.23

(continued on next page)

Table 7–1 (Cont.) Lead Counts and Dimensional Attributes

Symbol	Limit	Dimensions in Millimeters
ccc	—	0.1
ddd	—	0.13
ttt	—	0.25
D	BSC	31.2
D1	BSC	28
E	BSC	31.2
E1	BSC	28
R	MIN	0.13
R	MAX	0.3

Figure 7-1 Package Dimensions

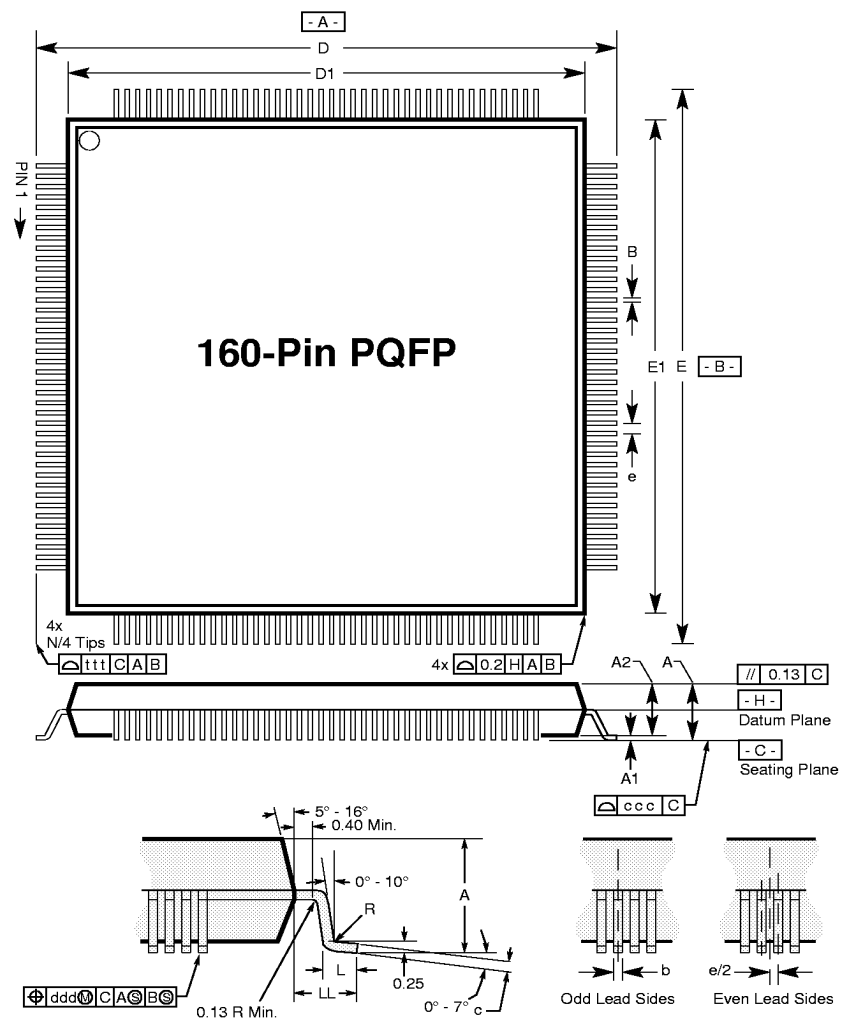

LJ-04449.A15

7.1.2 Absolute Maximum Ratings

This section lists the absolute maximum ratings.

V_{DD}	3.0 V–3.6 V
T_J	100°C
T_A	70°C
P_{WC}	0.85 W
Storage temperature	–55°C to 125°C

7.2 Electrical Specifications

The following sections describe the electrical specifications of the 21052.

7.2.1 Interface Signal DC Electrical Specifications

Table 7–2 defines the dc parameters met by all 21052 signals.

Table 7–2 DC Specifications

Symbol	Parameter	Condition	Minimum	Maximum	Units
V_{ih}	Input high voltage	–	0.475 V_{DD}	5.5 V	V
V_{il}	Input low voltage	–	–0.5	0.325 V_{DD}	V
I_{ih}	Input high leakage current ¹	$V_{in} = 2.7$ V	–	70	μA
I_{il}	Input low leakage current ¹	$0 < V_{in} < V_{DD}$	–	±10	μA
V_{oh} ²	Output high voltage	$I_{out} = -500$ μA	0.9 V_{DD}	–	V
V_{oh5V} ³	Output high voltage	$I_{out} = -2$ mA	2.4	–	V
V_{ol} ²	Output low voltage	$I_{out} = 1500$ μA	–	0.1 V_{DD}	V
V_{ol5V} ^{3, 4}	Output low voltage	$I_{out} = 6$ mA or $I_{out} = 3$ mA	0.55	–	V
C_{in}	Input pin capacitance	–	–	10	pF

(continued on next page)

Table 7–2 (Cont.) DC Specifications

Symbol	Parameter	Condition	Minimum	Maximum	Units
C_{IDSEL}	p_idsel pin capacitance	–	–	8	pF
C_{clk}	p_clk , s_clk pin capacitance	–	5	12	pF

Footnotes:

1. Input high leakage current and input low leakage current include I_{ozl} or I_{ozh} leakage current for bidirectional signals.
2. For 3.3-volt signaling environment.
3. For 5.5-volt signaling environment.
4. Most output low voltage signals have 3 mA of current. The following output low voltage signals have 6 mA of low output current:

p_frame_l	p_trdy_l	p_irdy_l	p_devsel_l
p_stop_l	p_serr_l	p_perr_l	p_lock_l
s_frame_l	s_trdy_l	s_irdy	s_devsel_l
s_stop_l	s_perr_l	s_lock_l	

7.2.2 Interface Signal AC Timing Specifications

Table 7–3 and Figure 7–2 show the **p_clk** and **s_clk** ac timing.

Table 7–3 p_clk and s_clk AC Timing

Symbol	Parameter	Minimum	Maximum	Units	Notes
T_{cyc}	xclk cycle time	30	–	ns	–
T_{high}	xclk high time	12	–	ns	@1.5 V and @1 V/ns
T_{low}	xclk low time	12	–	ns	@1.5 V and @1 V/ns
	Slew rate	1	4	V/ns	0.4 to 2.4 V
T_{skew}	Delay from p_clk to s_clk	0	7	ns	@ 1.5 V


(continued on next page)

Table 7-3 (Cont.) p_clk and s_clk AC Timing

Symbol	Parameter	Minimum	Maximum	Units	Notes
T_{sclr}	p_clk rising to s_clk_o<4:0> rising	0	5	ns	@1.5 V ¹
T_{sclf}	p_clk falling to s_clk_o<4:0> falling	0	5	ns	@1.5 V ¹

¹Measured with 30 pF lumped load.

Figure 7-2 p_clk and s_clk AC Timing

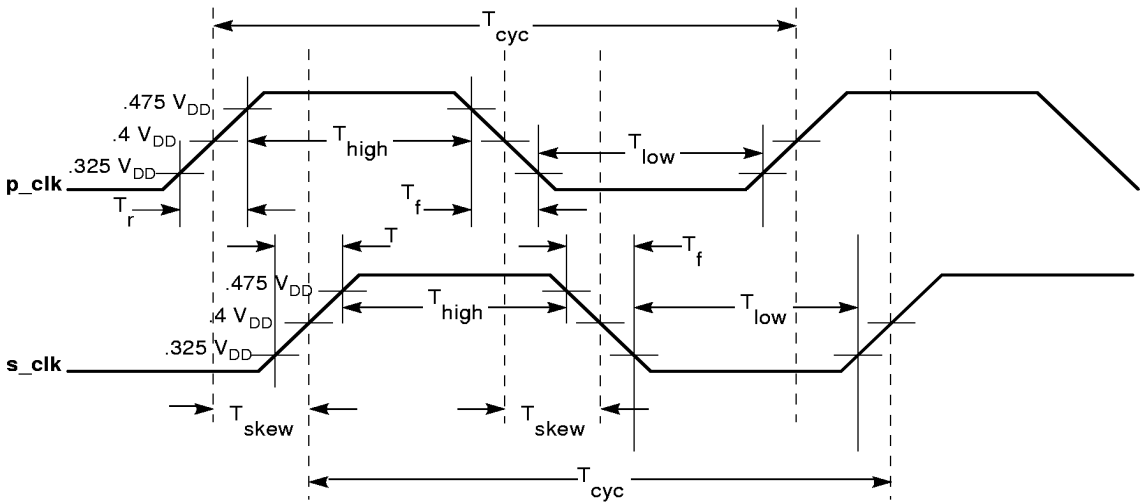

LJ-04450.A15

7.2.3 Input Signal AC Timing Specifications

Table 7–4 and Figure 7–3 show the input signal ac timings, and Table 7–5 shows the timing specifications for **xrst_l**.

Table 7–4 Input Signal AC Timings

Symbol	Parameter	Minimum	Maximum	Units
T_{val}	xclk -to- xsignal valid delay— bused signals ^{1, 2, 3}	2	11	ns
T_{val} (ptp)	xclk -to- xsignal valid delay— point-to-point ^{1, 2, 3}	2	12	ns
T_{on}	Float-to-active delay ¹	2	—	ns
T_{off}	Active-to-float delay ¹	—	28	ns
T_{su}	Input setup time to xclk — bused signals ^{1, 3}	7	—	ns
T_{su} (ptp)	Input setup time to xclk — point-to-point ^{1, 3}	10, 12	—	ns
T_h	Input signal hold time from xclk ¹	0	—	ns

¹All primary interface signals are used by **p_clk** and all secondary interface signals are used by **s_clk**.

²Minimum times measured with 0-pF equivalent load. Maximum times measured with 50-pF equivalent load.

³Point-to-point signals are **p_req_l**, **s_req_l<3:0>**, **p_gnt_l**, **s_gnt_l<3:0>**, and **s_cfn_l**.
All other PCI signals are shared.
All **xgnt_l** signals and **s_cfn_l** have a setup time of 10 ns.
xreq_l has a setup time of 12 ns.

Figure 7–3 AC Timing Waveforms

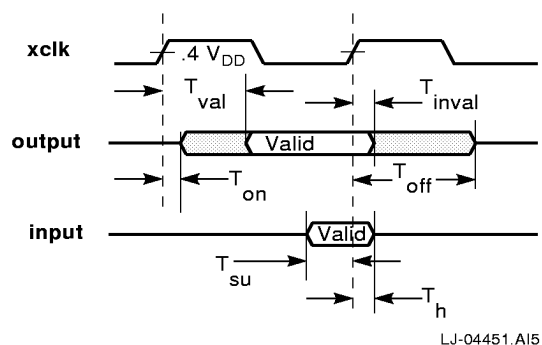


Table 7–5 xrst_l Timing Specifications

Symbol	Parameter	Minimum	Maximum	Units
T_{prot}	p_rst_l active time after power stable	1	–	μs
$T_{prot-clk}$	p_rst_l active time after p_clk stable	100	–	μs
$T_{prot-off}$	p_rst_l active to output float delay	–	40	ns
T_{rst}	s_rst_l active after p_rst_l assertion	–	40	ns
T_{rst-on}	s_rst_l active time after s_clk stable	100	–	μs
$T_{rst-off}$	s_rst_l active to secondary output float delay	–	40	ns