


1. CONFIGURATION & DIMENSIONS :

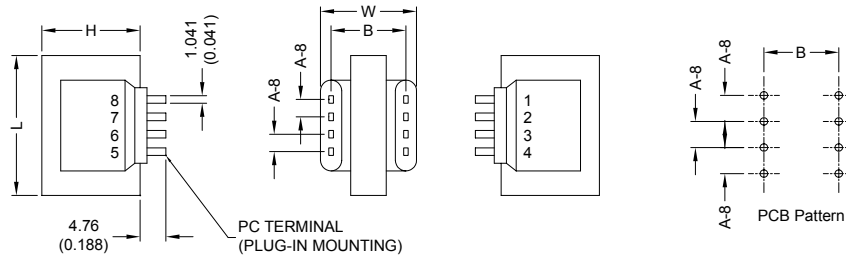


TYPE DPC 8 PINS

UNIT : mm (inch)

SIZE (VA)	L	W	H	A-8 8 PIN	B	WT. (gram)	OPTIONAL BRACKET *		
							NO.	MW	MD
4.4	41.28 (1.625)	31.75 (1.250)	34.93 (1.375)	6.35 (0.250)	27.94 (1.100)	197.86	---	---	---

2. SCHEMATIC :

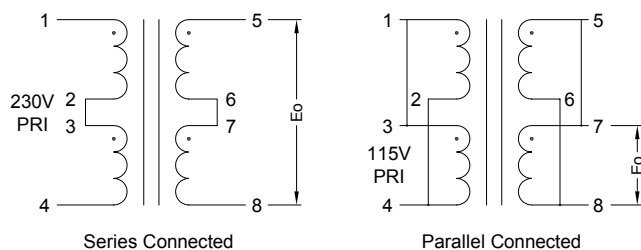

3. ELECTRICAL CHARACTERISTICS (@ 25°C) :

- a. Primary Voltage AC 115/230 V 50/60 Hz .
- b. No Load Primary Current Less Than 30mA .
- c. Secondary Voltage (±5%) Series AC - V .
Parallel AC - V .
- d. Secondary Load Current Series 440mA .
Parallel 880mA .
- e. Full Load Primary Current Less Than - mA .
- f. Full Load Secondary Voltage (±5%) Series 10.00V .
Parallel 5.00V .
- g. DC Resistance
Pin 1-2 Primary-1 = 277 Ohm .
Pin 3-4 Primary-2 = 332 Ohm .
Pin 5-6 Secondary = - Ohm .
Pin 7-8 = - Ohm .
- h. Insulation Resistance DC 500V 100Meg Ohm Of More .
- i. Withstand Voltage (Hi-Pot) AC 1500V 60Hz 1 Minutes .
- j. Temperature Rise Less Than 60 Deg C .
- k. Core Size EI-41 x 13.50 m/m .

l. Turns & Wire Gauge

Primary-1	Pin 1-2	Turns	Diameter	mm
Primary-2	Pin 3-4	Turns	Diameter	mm
Secondary-1	Pin 5-6	Turns	Diameter	mm
Secondary-2	Pin 7-8	Turns	Diameter	mm



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

17.03.2008