


SMD 14-Pin 5 Tap TTL Compatible Active Delay Lines

TAP DELAYS ±5% or ±2 nS	TOTAL DELAYS ±5% or ±2 nS	PART NUMBER	TAP DELAYS ±5% or ±2 nS	TOTAL DELAYS ±5% or ±2 nS	PART NUMBER
5, 10, 15, 20	25	EPA073-25	80, 160, 240, 320	400	EPA073-400
6, 12, 18, 24	30	EPA073-30	84, 168, 252, 336	420	EPA073-420
7, 14, 21, 28	35	EPA073-35	88, 176, 264, 352	440	EPA073-440
8, 16, 24, 32	40	EPA073-40	90, 180, 270, 360	450	EPA073-450
9, 18, 27, 36	45	EPA073-45	94, 188, 282, 376	470	EPA073-470
10, 20, 30, 40	50	EPA073-50	100, 200, 300, 400	500	EPA073-500
12, 24, 36, 48	60	EPA073-60	110, 220, 330, 440	550	EPA073-550
15, 30, 45, 60	75	EPA073-75	120, 240, 360, 480	600	EPA073-600
20, 40, 60, 80	100	EPA073-100	130, 260, 390, 520	650	EPA073-650
25, 50, 75, 100	125	EPA073-125	140, 280, 420, 560	700	EPA073-700
30, 60, 90, 120	150	EPA073-150	150, 300, 450, 600	750	EPA073-750
35, 70, 105, 140	175	EPA073-175	160, 320, 480, 640	800	EPA073-800
40, 80, 120, 160	200	EPA073-200	170, 340, 510, 680	850	EPA073-850
45, 90, 135, 180	225	EPA073-225	180, 360, 540, 720	900	EPA073-900
50, 100, 150, 200	250	EPA073-250	190, 380, 570, 760	950	EPA073-950
60, 120, 180, 240	300	EPA073-300	200, 400, 600, 800	1000	EPA073-1000
70, 140, 210, 280	350	EPA073-350			


Delay times referenced from input to leading edges at 25°C, 5.0V.

DC Electrical Characteristics					
Parameter	Test Conditions	Min	Max	Unit	
V _{OH}	High-Level Output Voltage	V _{CC} = min. V _{IL} = max. I _{OH} = max	2.7		V
V _{OL}	Low-Level Output Voltage	V _{CC} = min. V _{IH} = min. I _{OL} = max	0.5		V
V _{IK}	Input Clamp Voltage	V _{CC} = min. I _I = I _{IK}	-1.2		V
I _{IH}	High-Level Input Current	V _{CC} = max. V _{IN} = 2.7V	50		µA
		V _{CC} = max. V _{IN} = 5.25V	1.0		mA
I _{IL}	Low-Level Input Current	V _{CC} = max. V _{IN} = 0.5V	-2		mA
I _{OS}	Short Circuit Output Current	V _{CC} = max. V _{OUT} = 0. (One output at a time)	-40	-100	mA
I _{CCH}	High-Level Supply Current	V _{CC} = max. V _{IN} = OPEN	75		mA
I _{CCL}	Low-Level Supply Current	V _{CC} = max. V _{IN} = 0	75		mA
T _{RO}	Output Rise Time	T _d ≤ 500 nS (0.75 to 2.4 Volts) T _d > 500 nS	4	5	nS
N _H	Fanout High-Level Output	V _{CC} = max. V _{OH} = 2.7V	20 TTL LOAD		
N _L	Fanout Low-Level Output	V _{CC} = max. V _{OL} = 0.5V	10 TTL LOAD		

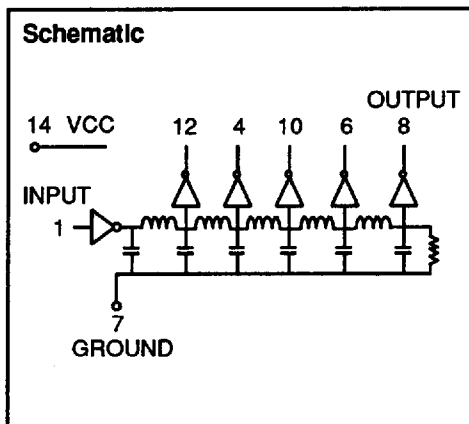

Recommended Operating Conditions				
Parameter	Operating Conditions	Min	Max	Unit
V _{CC}	Supply Voltage	4.75	5.25	V
V _{IH}	High-Level Input Voltage	2.0		V
V _{IL}	Low-Level Input Voltage		0.8	V
I _{IK}	Input Clamp Current		-18	mA
I _{OH}	High-Level Output Current		-1.0	mA
I _{OL}	Low-Level Output Current		20	mA
PW*	Pulse Width of Total Delay	40		%
d*	Duty Cycle		40	%
T _A	Operating Free-Air Temperature	0	+70	°C

*These two values are inter-dependent.

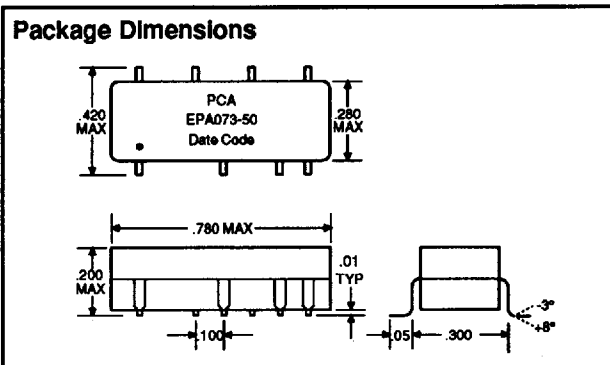

Input Pulse Test Conditions @ 25° C			
Parameter	Test Conditions	Unit	Value
E _{IN}	Pulse Input Voltage	Volts	3.2
PW	Pulse Width % of Total Delay	%	110
T _{RI}	Pulse Rise Time (0.75 - 2.4 Volts)	nS	2.0
F _{RR}	Pulse Repetition Rate @ T _d ≤ 200 nS	MHz	1.0
	Pulse Repetition Rate @ T _d > 200 nS	KHz	100
V _{CC}	Supply Voltage	Volts	5.0

PCA ELECTRONICS INC.

16799 SCHOENBORN ST.
SEPULVEDA, CA 91343
TEL: (818) 892-0761
FAX: (818) 894-5791
TWX: (910) 496-1525