

# PC315 Series

Opaque\*, Mini-Flat Package, High  
Sensitivity Photocoupler

T-41-85

## ■ Features

1. High current transfer ratio  
(CTR : MIN. 600% at  $I_F = 1\text{mA}$ ,  $V_{CE} = 2\text{V}$ )
2. Opaque type, mini-flat package  
PC315 (1-channel) PC3D15 (2-channel)  
PC3Q15 (4-channel)
3. Subminiature type  
(The volume is smaller than that of our conventional DIP type by as far as 30%).)
4. Isolation voltage between input and output  
 $V_{ISO} : 2,500\text{VRms}$

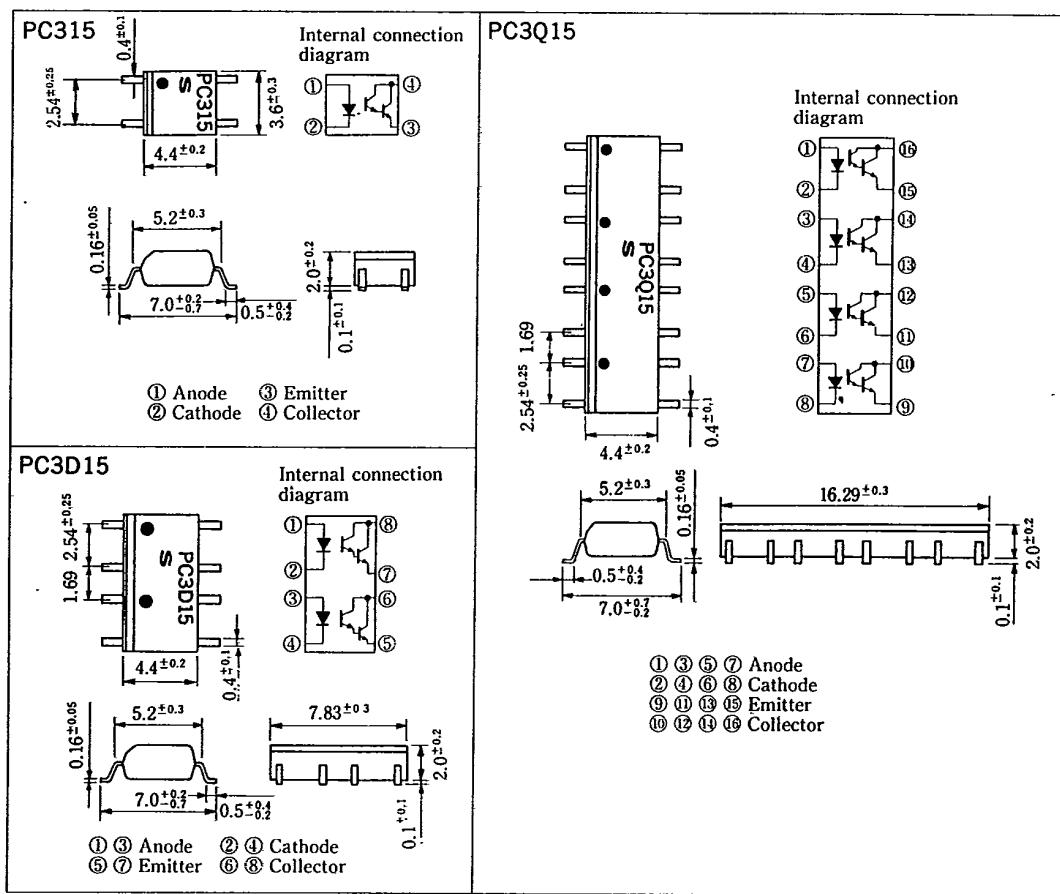
\* Employs double transfer mold technology.

## ■ Applications

1. Hybrid substrates that require high density mounting
2. Programmable controllers

## ■ Outline Dimensions

(Unit : mm)



Photocouplers

**Absolute Maximum Ratings**

(Ta=25°C)

T-41-85

Parameter		Symbol	Rating	Unit
Input	Forward current	I <sub>F</sub>	50	mA
	*1 Peak forward current	I <sub>FM</sub>	1	A
	Reverse voltage	V <sub>R</sub>	6	V
	Power dissipation	P	70	mW
Output	Collector-emitter voltage	V <sub>CEO</sub>	35	V
	Emitter-collector voltage	V <sub>ECD</sub>	6	V
	Collector current	I <sub>C</sub>	80	mA
	Collector power dissipation	P <sub>C</sub>	150	mW
	Total power dissipation	P <sub>tot</sub>	170	mW
	*2 Isolation voltage	V <sub>ISO</sub>	2,500	Vrms
	Operating temperature	T <sub>opr</sub>	-30 ~ +100	°C
	Storage temperature	T <sub>stg</sub>	-40 ~ +125	°C
*3 Soldering temperature		T <sub>sol</sub>	260	°C

\*1 Pulse width ≤ 100 μs, Duty ratio = 0.001

\*2 RH = 40 ~ 60%, AC for 1 minute

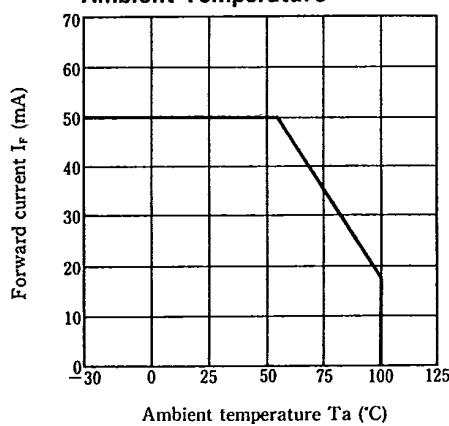
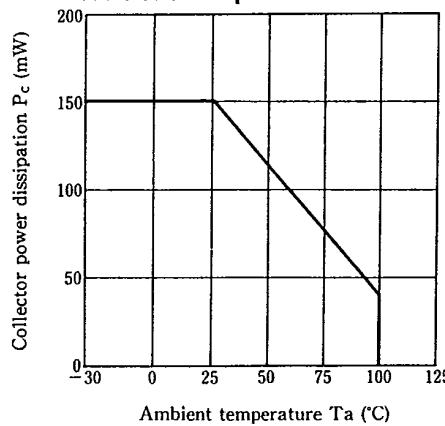
\*3 For 10 seconds

**Electro-optical Characteristics**

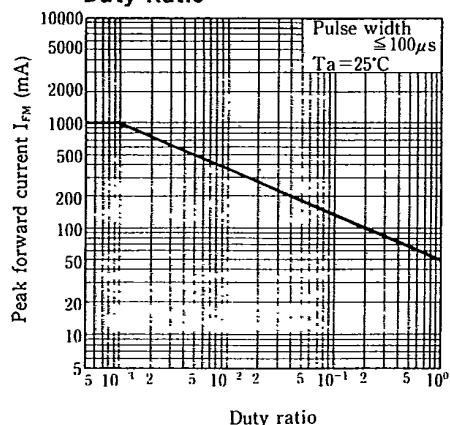
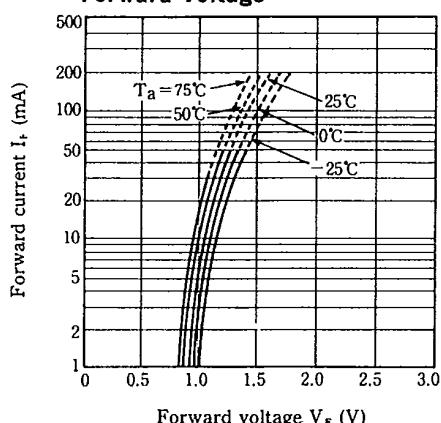
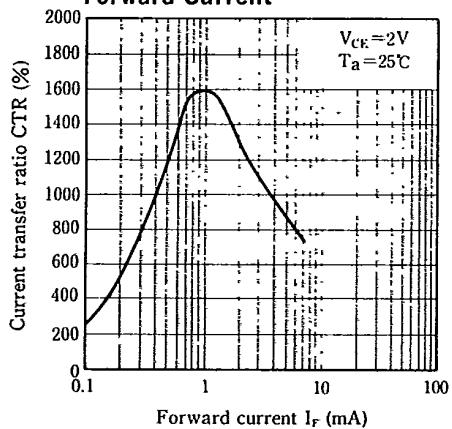
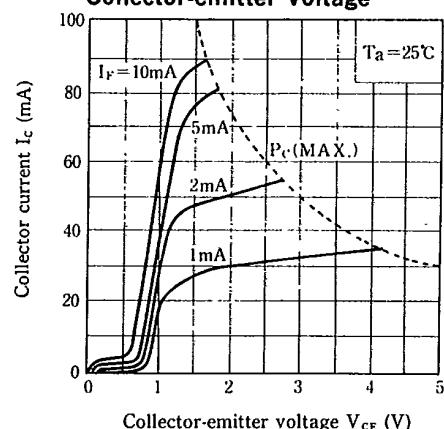
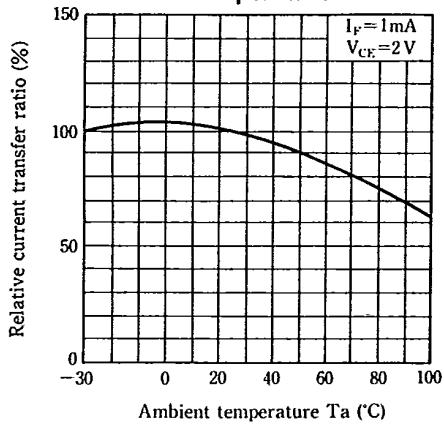
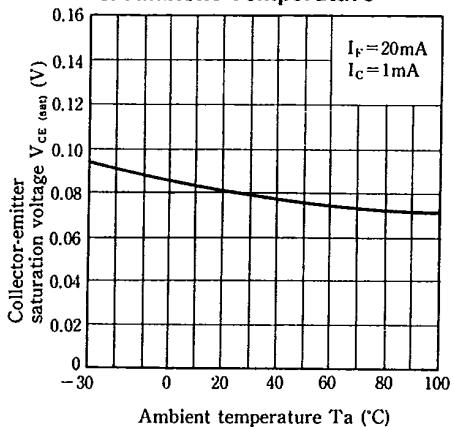
(Ta=25°C)

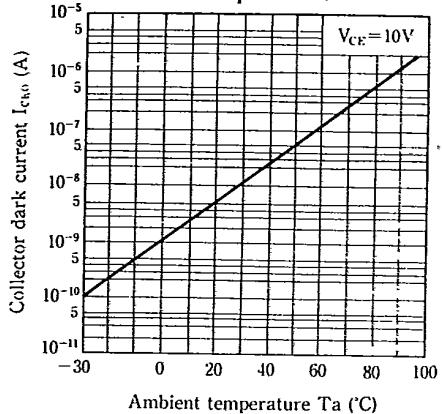
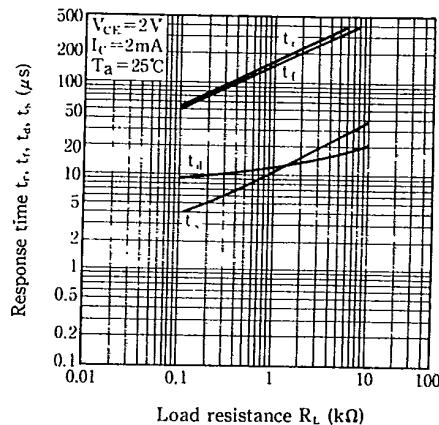
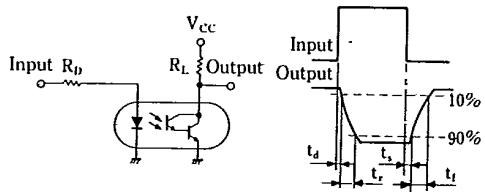
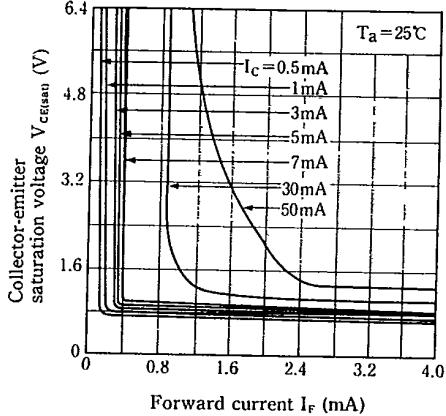
Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V <sub>F</sub>	I <sub>F</sub> =20mA	—	1.2	1.4	V
	Reverse current	I <sub>R</sub>	V <sub>R</sub> =4V	—	—	10	μA
	Terminal capacitance	C <sub>t</sub>	V=0, f=1kHz	—	30	250	pF
Output	Collector dark current	I <sub>CEO</sub>	V <sub>CE</sub> =10V, I <sub>F</sub> =0	—	—	10 <sup>-6</sup>	A
	Current transfer ratio	CTR	I <sub>F</sub> =1mA, V <sub>CE</sub> =2V	600	1,600	7,500	%
Transfer characteristics	Collector-emitter saturation voltage	V <sub>CE(sat)</sub>	I <sub>F</sub> =20mA, I <sub>C</sub> =1mA	—	0.8	1.0	V
	Isolation resistance	R <sub>ISO</sub>	DC500V, RH=40 ~ 60%	5×10 <sup>10</sup>	10 <sup>11</sup>	—	Ω
	Floating capacitance	C <sub>f</sub>	V=0, f=1MHz	—	0.6	1.0	pF
	Response time (Rise)	t <sub>r</sub>	V <sub>CE</sub> =2V, I <sub>C</sub> =2mA	—	60	300	μs
	Response time (Fall)	t <sub>f</sub>	R <sub>L</sub> =100Ω	—	53	250	μs

6

**Fig. 1 Forward Current vs. Ambient Temperature****Fig. 2 Collector Power Dissipation vs. Ambient Temperature**

SHARP

**Fig. 3 Peak Forward Current vs. Duty Ratio****Fig. 4 Forward Current vs. Forward Voltage****Fig. 5 Current Transfer Ratio vs. Forward Current****Fig. 6 Collector Current vs. Collector-emitter Voltage****Fig. 7 Relative Current Transfer Ratio vs. Ambient Temperature****Fig. 8 Collector-emitter Saturation Voltage vs. Ambient Temperature**

**Fig. 9 Collector Dark Current vs. Ambient Temperature****Fig. 10 Response Time vs. Load Resistance****Test Circuit for Response Time****Fig. 11 Collector-emitter Saturation Voltage vs. Forward Current****6****Package Specification of PC300 Series (1-ch type)**

Model No.	Sales Unit	Package Specifications	Diameter of Reel	Tape Width
PC3 * * Z	1 pc.	Sleeve package (Net: 125 pcs.)	—	—
PC3 * *	3,000 pcs.	Taping package (Net: 3,000 pcs.)	φ370mm	12mm
PC3 * * T	750 pcs.	Taping package (Net: 750 pcs.)	φ178mm	12mm