

701 2779

701 2780

701 2792


NTN Bearings (UK) Ltd.

For New Technology Network

NTN®

NTN corporation

Data Sheet 626

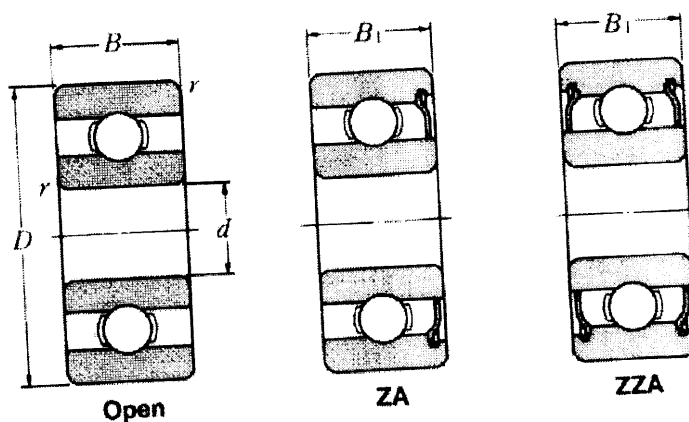

Dimensions

$d = 6.000 \text{ mm}, 0.2362 \text{ in.}$
 $D = 19.000 \text{ mm}, 0.7480 \text{ in.}$
 $B = 6.000 \text{ mm}, 0.2362 \text{ in.}$
 $B_1 = 6.000 \text{ mm}, 0.2362 \text{ in.}$

Load Ratings

$C_r = 2340 \text{ N}, 525 \text{ lbf}$
 $C_{or} = 885 \text{ N}, 200 \text{ lbf}$

Mass = 8.1g approx.

Limiting Speeds

r/min	
Grease	Oil
34000	40000

Supplementary Symbols

626U (TM)

U = Seal Groove, (TM) = Country of origin Taiwan

626ZZCNM/5C

ZZ = Two steel shield plates, CNM = Medium group of normal clearance.

5C = Caltex RPM SRI2 grease.

626LLUCNM/1K (TM)

LLU = Two contact type rubber seals, 1K = Multemp PS No 2 grease.