

PowerMOS transistor

BUK437-500A
BUK437-500B

T-39-15

GENERAL DESCRIPTION

N-channel enhancement mode field-effect power transistor in a plastic envelope.
The device is intended for use in Switched Mode Power Supplies (SMPS), motor control, welding, DC/DC and AC/DC converters, and in general purpose switching applications.

QUICK REFERENCE DATA

SYMBOL	PARAMETER	MAX.	MAX.	UNIT
	BUK437	-500A	-500B	
V_{DS}	Drain-source voltage	500	500	V
I_D	Drain current (DC)	11	10	A
P_{tot}	Total power dissipation	180	180	W
$R_{DS(ON)}$	Drain-source on-state resistance	0.6	0.8	Ω

MECHANICAL DATA

Dimensions in mm

Net Mass: 5 g

Pinning:

- 1 = Gate
- 2 = Drain
- 3 = Source

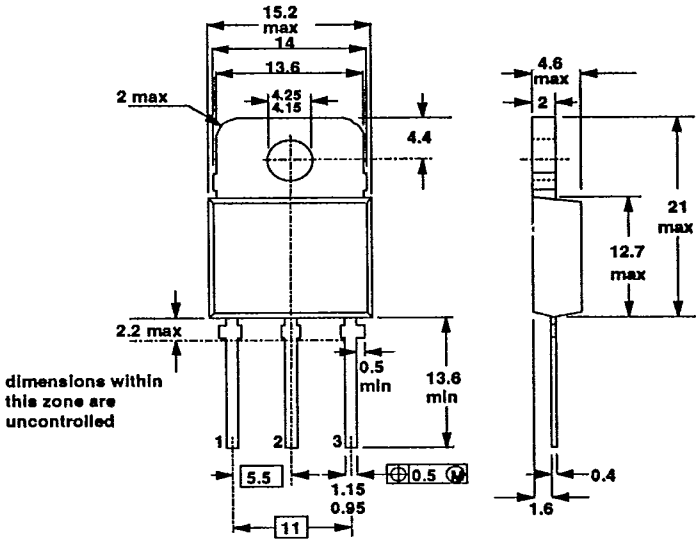



Fig.1 SOT-93; drain connected to mounting base.

- Notes
- 1. Observe the general handling precautions for electrostatic-discharge sensitive devices (ESDs) to prevent damage to MOS gate oxide.
 - 2. Accessories supplied on request: refer to Mounting instructions for SOT93 envelope.

PowerMOS transistor

BUK437-500A
BUK437-500B

T-39-15

RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134)

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{DS}	Drain-source voltage	-	-	500	V
V_{DGR}	Drain-gate voltage	$R_{GS} = 20 \text{ k}\Omega$	-	500	V
$\pm V_{GS}$	Gate-source voltage	-	-	30	V
I_D	Drain current (DC)	$T_{mb} = 25^\circ\text{C}$	-	-500A 11	A
I_D	Drain current (DC)	$T_{mb} = 100^\circ\text{C}$	-	7.0	A
I_{DM}	Drain current (pulse peak value)	$T_{mb} = 25^\circ\text{C}$	-	44	A
P_{tot}	Total power dissipation	$T_{mb} = 25^\circ\text{C}$	-	180	W
T_{stg}	Storage temperature	-	-55	150	$^\circ\text{C}$
T_j	Junction Temperature	-	-	150	$^\circ\text{C}$

THERMAL RESISTANCES

From junction to mounting base	$R_{thj-mb} = 0.69 \text{ K/W}$
From junction to ambient	$R_{thj-a} = 45 \text{ K/W}$

STATIC CHARACTERISTICS

 $T_{mb} = 25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_{(BR)DSS}$	Drain-source breakdown voltage	$V_{GS} = 0 \text{ V}; I_D = 0.25 \text{ mA}$	500	-	-	V
$V_{GS(TO)}$	Gate threshold voltage	$V_{DS} = V_{GS}; I_D = 1 \text{ mA}$	2.1	3.0	4.0	V
I_{DSS}	Zero gate voltage drain current	$V_{DS} = 500 \text{ V}; V_{GS} = 0 \text{ V}; T_j = 25^\circ\text{C}$	-	2	20	μA
I_{DSS}	Zero gate voltage drain current	$V_{DS} = 500 \text{ V}; V_{GS} = 0 \text{ V}; T_j = 125^\circ\text{C}$	-	0.1	1.0	mA
I_{GSS}	Gate source leakage current	$V_{GS} = \pm 30 \text{ V}; V_{DS} = 0 \text{ V}$	-	10	100	nA
$R_{DS(ON)}$	Drain-source on-state resistance	$V_{GS} = 10 \text{ V}; I_D = 6.5 \text{ A}$	-	0.55	0.6	Ω
		BUK437-500A	-	0.7	0.8	Ω
		BUK437-500B	-			

DYNAMIC CHARACTERISTICS

 $T_{mb} = 25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
g_{fs}	Forward transconductance	$V_{DS} = 25 \text{ V}; I_D = 6.5 \text{ A}$	5.0	8.0	-	S
C_{iss}	Input capacitance	$V_{GS} = 0 \text{ V}; V_{DS} = 25 \text{ V}; f = 1 \text{ MHz}$	-	1500	1800	pF
C_{oss}	Output capacitance		-	170	270	pF
C_{rss}	Feedback capacitance		-	70	120	pF
t_{don}	Turn-on delay time	$V_{DD} = 30 \text{ V}; I_D = 2.8 \text{ A};$	-	20	40	ns
t_r	Turn-on rise time	$V_{GS} = 10 \text{ V}; R_{GS} = 50 \Omega;$	-	60	90	ns
t_{doff}	Turn-off delay time	$R_{gen} = 50 \Omega$	-	200	250	ns
t_f	Turn-off fall time		-	75	90	ns
L_d	Internal drain inductance	Measured from contact screw on tab to centre of die	-	5	-	nH
L_d	Internal drain inductance	Measured from drain lead 6 mm from package to centre of die	-	5	-	nH
L_s	Internal source inductance	Measured from source lead 6 mm from package to source bond pad	-	12.5	-	nH

PowerMOS transistor





BUK437-500A
BUK437-500B

T-39-15

REVERSE DIODE RATINGS AND CHARACTERISTICS

 $T_{mb} = 25^\circ\text{C}$ unless otherwise specified







SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I_{DR}	Continuous reverse drain current	-	-	-	11	A
I_{DRM}	Pulsed reverse drain current	-	-	-	44	A
V_{SD}	Diode forward voltage	$I_F = 11\text{ A}; V_{GS} = 0\text{ V}$	-	1.1	1.4	V
t_{rr}	Reverse recovery time	$I_F = 11\text{ A}; -di_F/dt = 100\text{ A}/\mu\text{s}; V_{GS} = 0\text{ V}; V_R = 100\text{ V}$	-	500	-	ns
Q_{rr}	Reverse recovery charge	$I_F = 11\text{ A}; -di_F/dt = 100\text{ A}/\mu\text{s}; V_{GS} = 0\text{ V}; V_R = 100\text{ V}$	-	6.0	-	μC

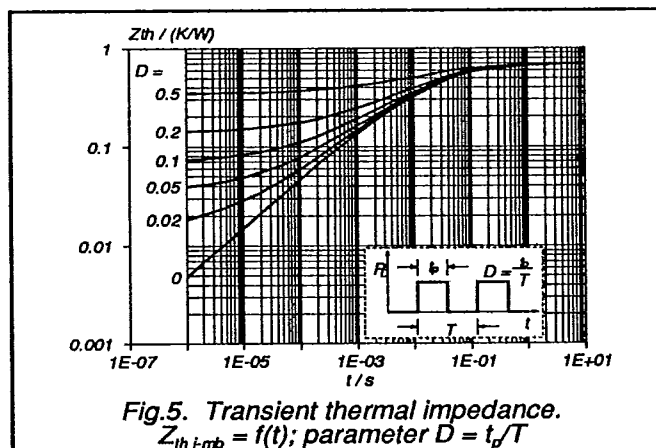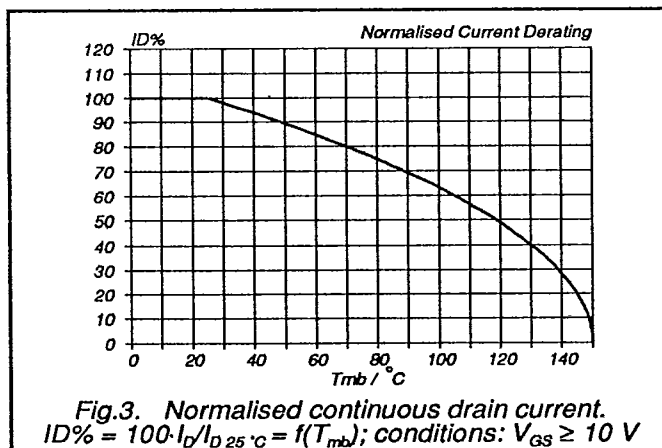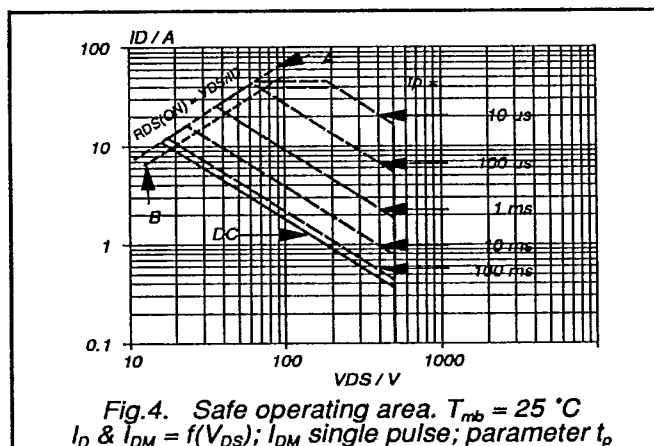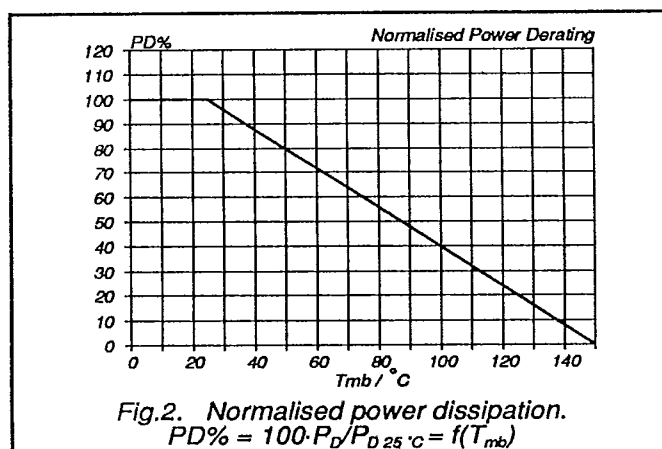

PowerMOS transistor

BUK437-500A
BUK437-500B

T-39-15

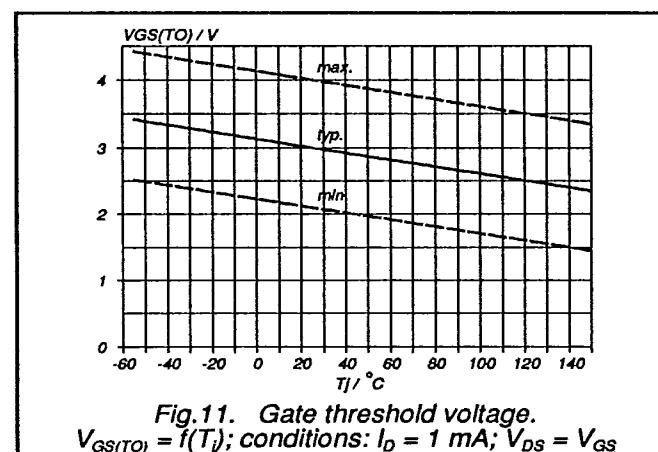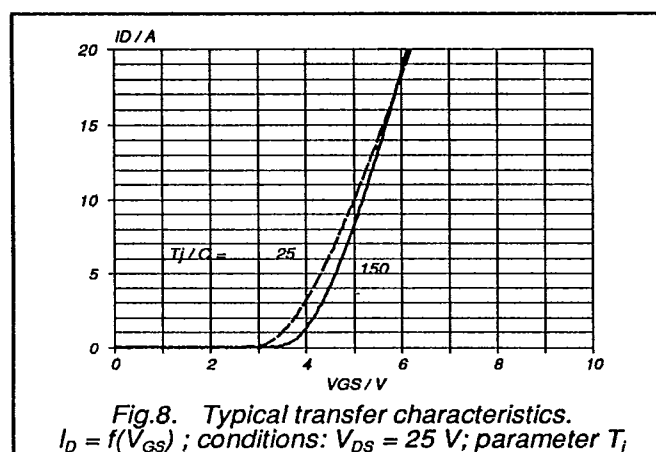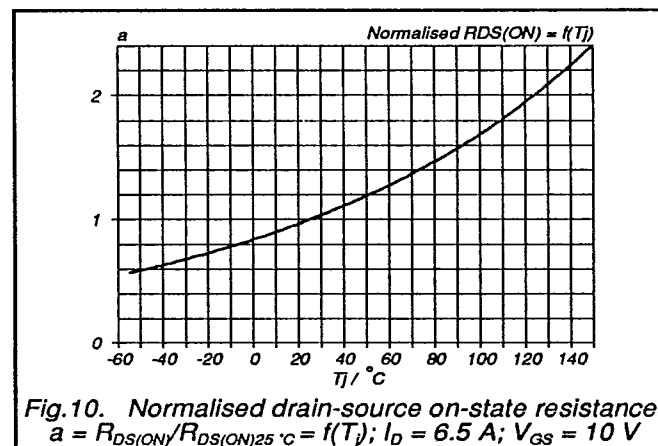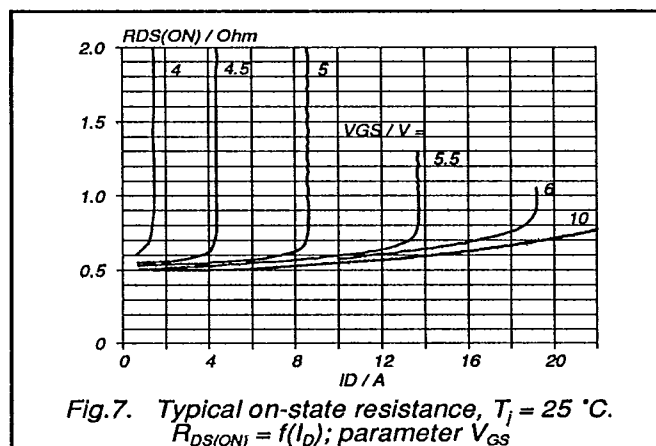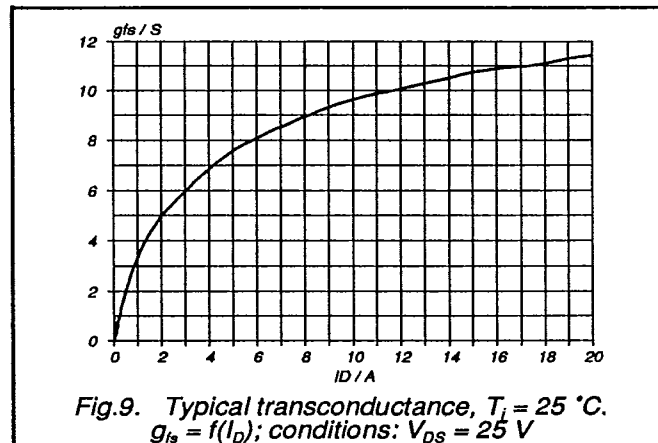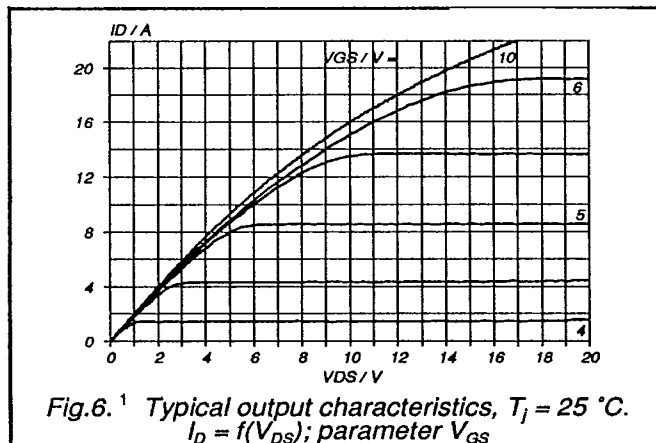

PowerMOS transistor

BUK437-500A
BUK437-500B

T-39-15

