

SANYO

No. ※ 4663

LC36256AL, AML-70W/85W/10W/12W**256 K (32768 words × 8 bits) SRAM****Preliminary****Overview**

The LC36256AL, AML-70W/85W/10W/12W are fully asynchronous silicon gate CMOS static RAMs with an 32768 words × 8 bits.

This series has $\overline{CE}$ chip enable pin for device select/nonselect control and an $\overline{OE}$ output enable pin for output control, and features high speed, a wide temperature operating range, as well as low power dissipation.



For these reasons, the series is especially suited for use in systems requiring high speed, low power, and battery backup, and it is easy to expand memory capacity.

Features

- Access time
 - 70 ns (max.) : LC36256AL-70W, LC36256AML-70W
 - 85 ns (max.) : LC36256AL-85W, LC36256AML-85W
 - 100 ns (max.) : LC36256AL-10W, LC36256AML-10W
 - 120 ns (max.) : LC36256AL-12W, LC36256AML-12W
- Low current dissipation
 - During standby
 - 2 μ A (max.) / $T_a = 25^\circ\text{C}$
 - 5 μ A (max.) / $T_a = -10$ to $+40^\circ\text{C}$
 - 25 μ A (max.) / $T_a = -10$ to $+70^\circ\text{C}$
 - During data retention
 - 1 μ A (max.) / $T_a = 25^\circ\text{C}$
 - 2 μ A (max.) / $T_a = -10$ to $+40^\circ\text{C}$
 - 10 μ A (max.) / $T_a = -10$ to $+70^\circ\text{C}$
 - During operation (DC)
 - 10 mA (max.)
- Single 5 V power supply: 5 V $\pm 10\%$
- Data retention power supply voltage: 2.0 to 5.5 V
- No clock required (Fully static memory)
- All input/output levels are TTL compatible
- Common input/output pins, with three output states
- Packages
 - DIP 28-pin plastic package : LC36256AL
 - SOP 28-pin plastic package : LC36256AML

Package Dimensions

unit: mm

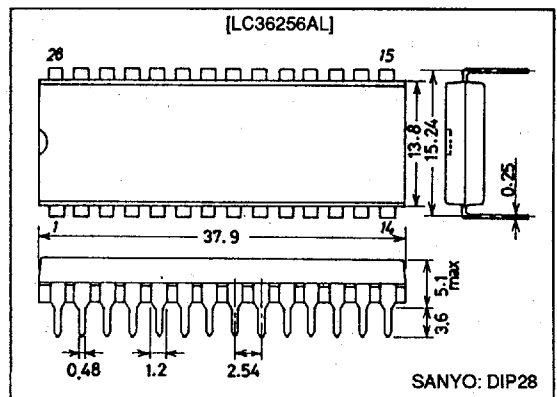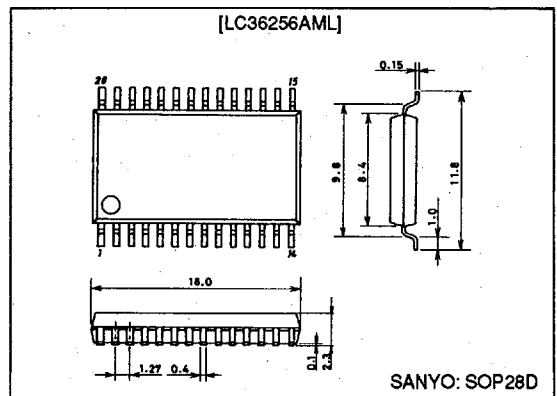3012A-DIP28**3187-SOP28D****SANYO Electric Co., Ltd. Semiconductor Business Headquarters**

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

Specifications

Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V_{CC} max		7.0	V
Input pin voltage	V_{IN}		-0.5^* to $V_{CC} + 0.5$	V
I/O pin voltage	V_{IO}		-0.5^* to $V_{CC} + 0.5$	V
Allowable power dissipation	P_d max	LC36256AL	1.0	W
		LC36256AML	0.7	W
Operating temperature range	T_{opr}		-10 to $+70$	$^\circ\text{C}$
Storage temperature range	T_{stg}		-55 to $+150$	$^\circ\text{C}$

* -3.0 V when pulse width is less than 50 ns

DC Recommended Operating Ranges at $T_a = -10$ to $+70^\circ\text{C}$

Parameter	Symbol	min	typ	max	Unit
Power supply voltage	V_{CC}	4.5	5.0	5.5	V
Input high level voltage	V_{IH}	2.2		$V_{CC} + 0.3$	V
Input low level voltage	V_{IL}	-0.3^*		$+0.8$	V

* -3.0 V when pulse width is less than 50 ns

DC Electrical Characteristics at $T_a = -10$ to $+70^\circ\text{C}$, $V_{CC} = 5\text{ V} \pm 10\%$

Parameter	Symbol	Conditions			min	typ*	max	Unit
Input leakage current	I _{LI}	V _{IN} = 0 to V _{CC}			-0.5		+0.5	μA
I/O leakage current	I _{LO}	V _{CE} = V _{IH} or V _{OE} = V _{IH} , V _{IO} = 0 to V _{CC}			-0.5		+0.5	μA
Output high level voltage	V _{OH}	I _{OH} = -1.0 mA			2.4			V
Output low level voltage	V _{OL}	I _{OL} = 2.1 mA					0.4	V
Operating supply current (DC)	I _{CCA1}	V _{CE} ≤ 0.2 V, V _{IN} ≤ 0.2 V or V _{IN} ≥ V _{CC} - 0.2 V				1	5	mA
	I _{CCA2}	V _{CE} = V _{IL} , I _{IO} = 0 mA				3	10	mA
Average operating supply current	I _{CCA3}	min cycle Duty = 100% I _{IO} = 0 mA	Access time	70 ns		30	50	mA
				85 ns		25	50	
				100 ns		23	50	
				120 ns		20	50	
Standby supply current	I _{CCS1}	V _{CE} ≥ V _{CC} - 0.2 V		-10 to +70°C			25	μA
				-10 to +40°C			5	
				25°C		0.5	2	
	I _{CCS2}	V _{CE} = V _{IH}				0.4	2	mA

* Reference values at $V_{CC} = 5\text{ V}$, $T_a = 25^\circ\text{C}$

Input/Output Capacitance at $T_a = 25^\circ\text{C}$, $f = 1\text{ MHz}$

Parameter	Symbol	Conditions	min	typ	max	Unit
Input/output capacitance	C_{IO}	$V_{IO} = 0\text{ V}$			8	pF
Input capacitance	C_{IN}	$V_{IN} = 0\text{ V}$			6	pF

Note: These parameters were obtained through sampling, and not full-lot measurement.

LC36256AL, AML-70W/85W/10W/12W

AC Electrical Characteristics at Ta = -10 to +70°C, VCC = 5 V ±10%

AC testing conditions

Input pulse voltage level : 0.8 V, 2.2 V
 Input rise and fall time : 5 ns
 Input - output timing level : 1.5 V
 Output load : 1 TTL gate + CL = 100 pF (85 ns/100 ns/120 ns)
 1 TTL gate + CL = 30 pF (70 ns)
 (including scope and jig capacitance)

Read Cycle


Parameter	Symbol	LC36256AL-70W LC36256AML-70W		LC36256AL-85W LC36256AML-85W		LC36256AL-10W LC36256AML-10W		LC36256AL-12W LC36256AML-12W		Unit
		min	max	min	max	min	max	min	max	
Read cycle time	t _{RC}	70		85		100		120		ns
Address access time	t _{AA}		70		85		100		120	ns
OE access time	t _{CA}		70		85		100		120	ns
OE access time	t _{OA}		35		45		50		60	ns
Output hold time	t _{OH}	20		20		20		20		ns
OE output enable time	t _{COE}	10		10		10		10		ns
OE output enable time	t _{OOE}	5		5		5		5		ns
OE output disable time	t _{COD}	0	30	0	30	0	30	0	30	ns
OE output disable time	t _{OOD}	0	30	0	30	0	30	0	30	ns

Write Cycle

Parameter	Symbol	LC36256AL-70W LC36256AML-70W		LC36256AL-85W LC36256AML-85W		LC36256AL-10W LC36256AML-10W		LC36256AL-12W LC36256AML-12W		Unit
		min	max	min	max	min	max	min	max	
Write cycle time	t _{WC}	70		85		100		120		ns
Address valid to end of write	t _{AW}	65		75		80		100		ns
Address setup time	t _{AS}	0		0		0		0		ns
Write pulse width	t _{WP}	50		50		60		70		ns
OE setup time	t _{CW}	65		75		80		100		ns
Write recovery time (WE)	t _{WR}	0		0		0		0		ns
Write recovery time (OE)	t _{WR1}	0		0		0		0		ns
Data setup time	t _{DS}	30		30		35		40		ns
Data hold time	t _{DH}	0		0		0		0		ns
WE output enable time	t _{WOE}	10		10		10		10		ns
WE output disable time	t _{WOD}	0	25	0	25	0	25	0	25	ns


Timing Chart

- Read Cycle (1): $\overline{CE} = \overline{OE} = V_{IL}$, $\overline{WE} = V_{IH}$

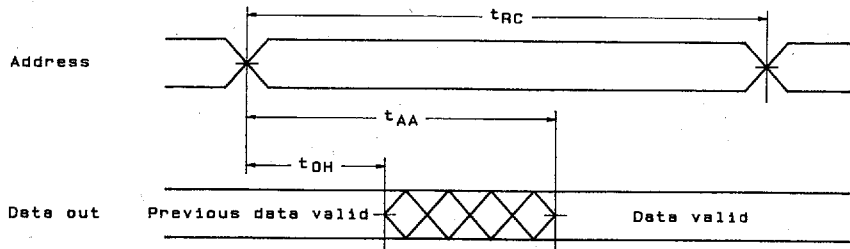


A01776

- Read Cycle (2): $\overline{WE} = V_{IH}$

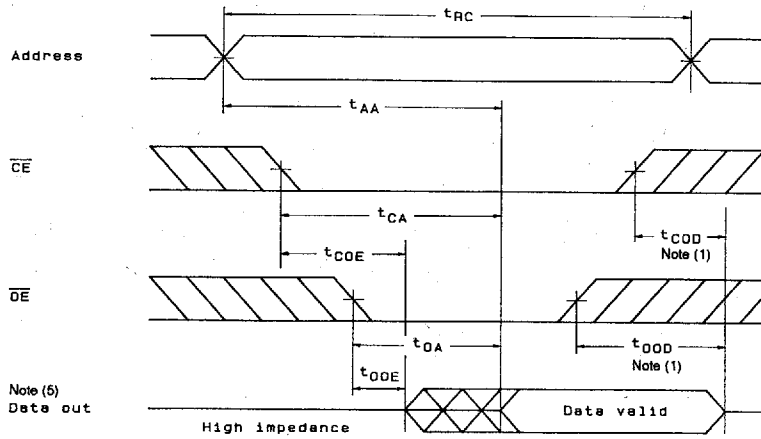


A01785

- Write Cycle (1): $\overline{WE}$ Control Note (6)

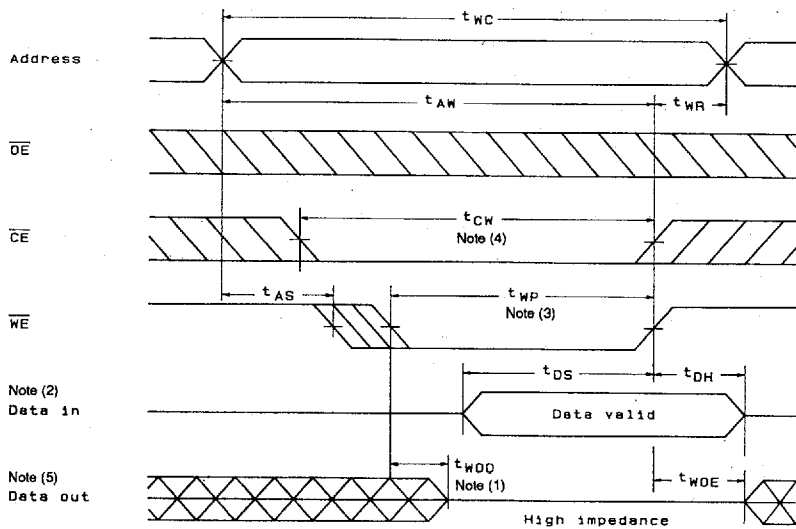

A01785

• Write Cycle (2): $\overline{\text{CE}}$ Control Note (6)

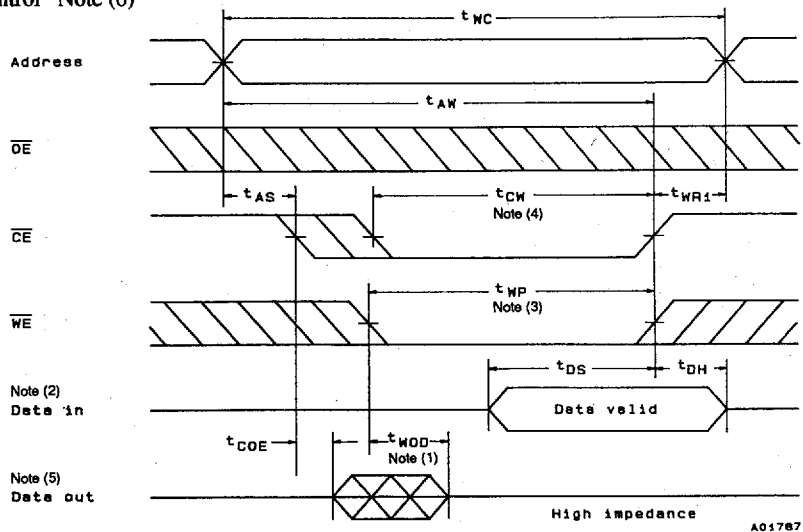

- Notes: (1) t_{COD} , t_{OOD} , and t_{WOD} are defined as the time at which the outputs becomes the high impedance state and are not referred to output voltage levels.
- (2) An external antiphase signal must not be applied when D_{OUT} is in the output state.
- (3) t_{WP} is the time interval that $\overline{\text{CE}}$ and $\overline{\text{WE}}$ are low-level and is defined as the interval from the falling of $\overline{\text{WE}}$ to the rising of $\overline{\text{CE}}$ or $\overline{\text{WE}}$ whichever is earlier.
- (4) t_{CW} is the time interval that $\overline{\text{CE}}$ and $\overline{\text{WE}}$ are low-level and is defined as the time from the falling of $\overline{\text{CE}}$ to the rising of $\overline{\text{CE}}$ or $\overline{\text{WE}}$ whichever is earlier.
- (5) D_{OUT} goes to the high-impedance state when either $\overline{\text{OE}}$ is high-level, $\overline{\text{CE}}$ is high-level, or $\overline{\text{WE}}$ is low-level.
- (6) When $\overline{\text{OE}}$ is high-level during the write cycle, D_{OUT} goes to the high-impedance state.


Data Retention Characteristics at $T_a = -10$ to $+70^\circ\text{C}$

Parameter	Symbol	Conditions	min	typ*	max	Unit
Data retention supply voltage	V_{DR}	$V_{\text{CE}} \geq V_{\text{CC}} - 0.2 \text{ V}$	2.0		5.5	V
Data retention supply current	I_{CCDR1}	$V_{\text{CC}} = 3.0 \text{ V}$, $V_{\text{CE}} \geq 2.8 \text{ V}$	-10 to $+70^\circ\text{C}$		10	μA
			-10 to $+40^\circ\text{C}$		2	
			25°C	0.25	1	
	I_{CCDR2}	$V_{\text{CC}} = 2.0$ to 5.5 V , $V_{\text{CE}} \geq V_{\text{CC}} - 0.2 \text{ V}$		0.5	25	μA
$\overline{\text{CE}}$ setup time	t_{CDR}		0			ns
$\overline{\text{CE}}$ hold time	t_{R}		t_{RC}^{**}			ns

* Reference values at $T_a = 25^\circ\text{C}$

** t_{RC} = read cycle time


Data Retention Waveform

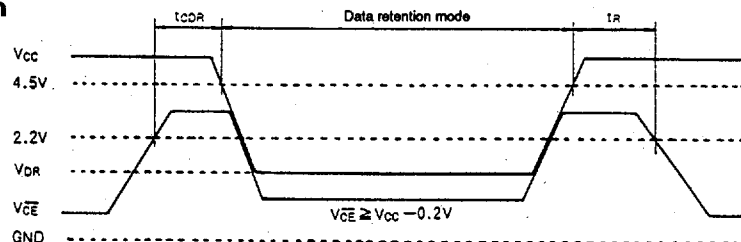

MEMORY PACKAGE DIMENSIONS


- All of Sanyo Memory package dimensions are illustrated below.
- All dimensions are in mm, and dimensions which are not followed by min. or max. are represented by typical values.
- No marking is indicated.

Package Dimensions 3012A(unit : mm)

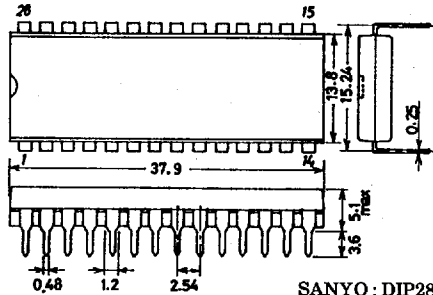


SANYO : DIP28(600mil)

Package Dimensions 3158(unit : mm)

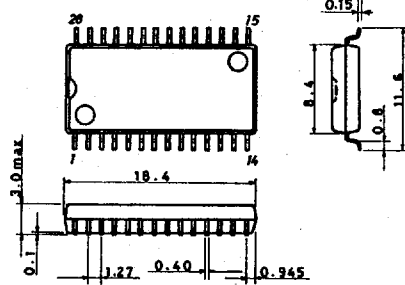


SANYO : SOP28(450mil)

Package Dimensions 3091(unit: mm)

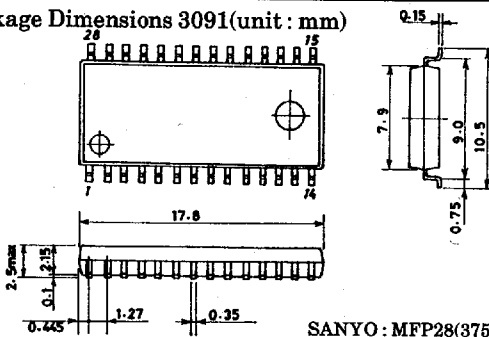


SANYO : MFP28(375mil)

Package Dimensions 3187(unit: mm)

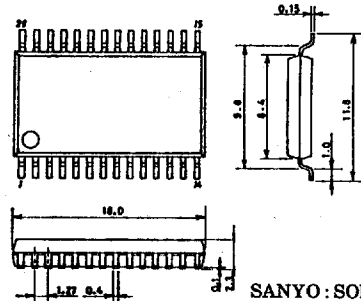


SANYO : SOP28D(450mil)

Package Dimensions 3123(unit: mm)

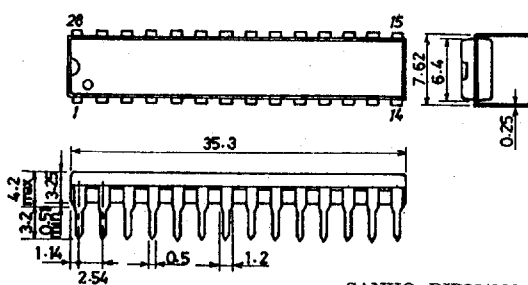


SANYO : DIP28(300mil)

Package Dimensions 3192(unit : mm)

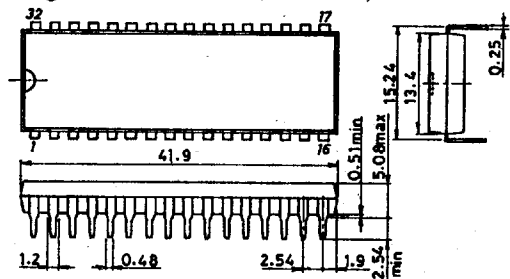


SANYO : DIP32(600mil)

Package Dimensions 3133 (unit : mm)

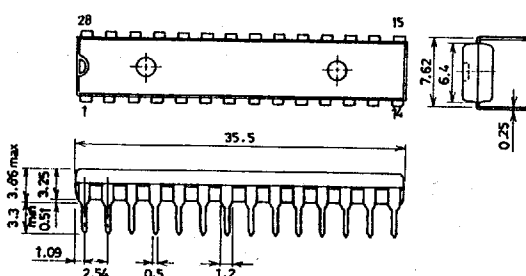


SANYO : DIP28(300mil)

Package Dimensions 3195(unit: mm)

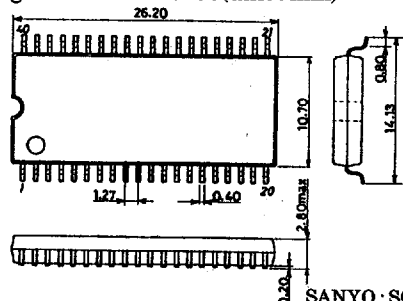


SANYO : SOP40(525mil)


Package Dimensions 3200(unit : mm)

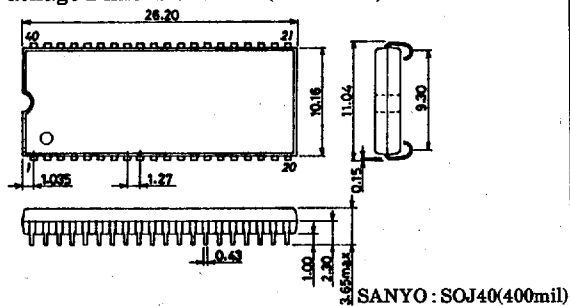

Package Dimensions 3205(unit : mm)

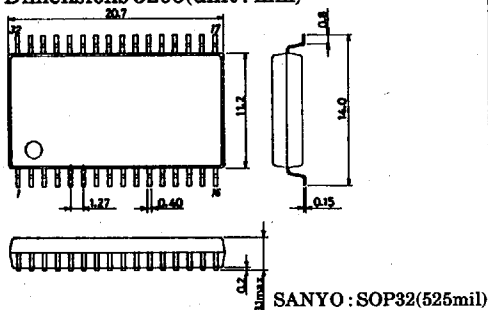

Package Dimensions 3207(unit : mm)

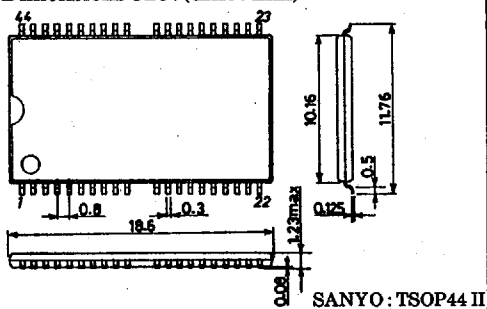

Package Dimensions 3211(unit : mm)

