TOSHIBA SCHOTTKY BARRIER RECTIFIER STACK SCHOTTKY BARRIER TYPE

20FWJ2C48M, U20FWJ2C48M


SWITCHING TYPE POWER SUPPLY APPLICATION

CONVERTER & CHOPPER APPLICATION

 $\begin{array}{lll} \bullet & \mbox{Peak Forward Voltage} & : \ V_{FM} {\leq} \, 0.47V \\ \\ \bullet & \mbox{Repetitive Peak Reverse Voltage} & : \ V_{RRM} {=} \, 30V \\ \\ \bullet & \mbox{Average Output Rectified Current} & : \ I_O {=} \, 20A \\ \end{array}$

• Low Switching Losses and Output Noise.


Unit in mm

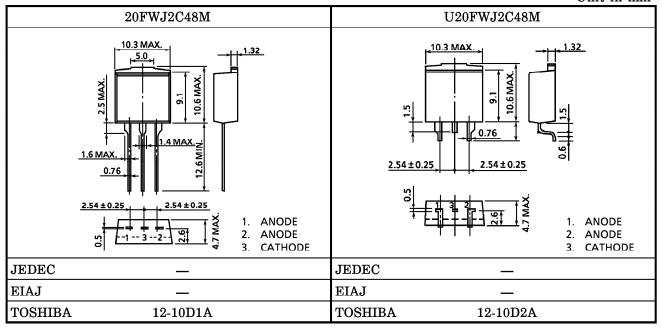

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT	
Repetitive Peak Reverse Voltage	v_{RRM}	30	V	
Average Output Rectified Current	I_{O}	20	A	
Peak One Cycle Surge Forward	Inche	200 (50Hz)	A	
Current (Sine Wave)	IFSM	220 (60Hz)		
Junction Temperature	$T_{ m j}$	-40~125	°C	
Storage Temperature Range	$\mathrm{T_{stg}}$	-40~150	°C	

POLARITY



961001EAA2


[●] TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	TYP.	MAX.	UNIT
Peak Forward Voltage	V_{FM} $I_{FM} = 10A$		_	0.47	V
Repetitive Peak Reverse Current	I_{RRM}	V _{RRM} =Rated		10	mA
Junction Capacitance	C_{j}	V_R =10V, f=1.0MHz	680		pF
Thermal Resistance	$ m R_{th(j-c)}$	DC Total, Junction to Case	_	1.5	°C/W

 $V_{\mbox{FM}},\,I_{\mbox{RRM}},\,C_{\mbox{\scriptsize j}}:\mbox{A value of one cell.}$

MARKING



%1	MARK	20FWJ2C	TYPE	20FWJ2C48M, U20FWJ2C48M			
%2	M						
*3	Lot Number						

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
 The information contained herein is subject to change without notice.

