



# Magnetic Transducer (AC)

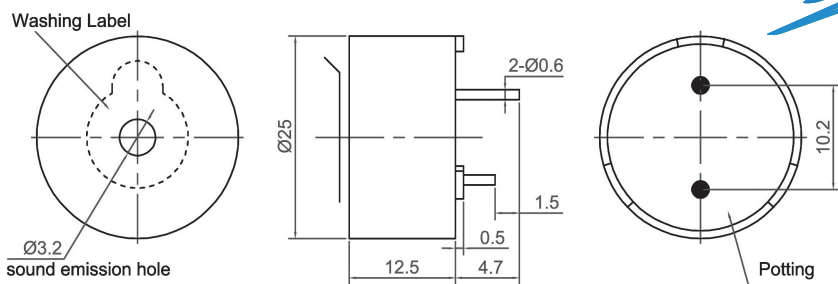

Canopus Part no.	Operating Voltage (V)	Rated Voltage (V)	Max Rated Current (mA)	Coil Resistance (W)	Min Sound Output (dBA)	Resonant Frequency (Hz)	Operating Temperature (°C)	Housing	Weight (g)
CMT2512E0730NP	3 ~ 5	5	80	27 ± 4	85 at 10cm	730	-40 ~ +85	Noryl	10
CMT2512F1000NP	3 ~ 8	6	70	36 ± 5	85 at 10cm	1000	-40 ~ +85	Noryl	10
CMT2512F1000NP	8 ~ 14	12	55	120 ± 15	85 at 10cm	1000	-40 ~ +85	Noryl	10



CANOPUS

**Your Efficient Supplier**  
[www.canopus.com.hk](http://www.canopus.com.hk)

TEL.: (852) 2806 2812

Fax: (852) 2652 2216