

REVISIONS												
LTR	DESCRIPTION	DATE (YR-MO-DA)	APPROVED									
A	Added a new vendor CAGE code 27014. Added test condition C to 4.2 and 4.3.2, step 1. Editorial changes throughout.	1989 NOV 22	<i>W. Beckman</i>									
REV												
SHEET												
REV												
SHEET												
REV STATUS OF SHEETS	REV	A	A	A	A	A	A	A	A	A	A	A
	SHEET	1	2	3	4	5	6	7	8	9	A	A
PMIC N/A	PREPARED BY <i>Jim M. Noh</i>	DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444										
STANDARDIZED MILITARY DRAWING THIS DRAWING IS AVAILABLE FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE AMSC N/A	CHECKED BY <i>Jim M. Noh</i>	MICROCIRCUIT, DIGITAL, BIPOLAR, ADVANCED LOW POWER SCHOTTKY TTL, 2-INPUT NAND DRIVERS, MONOLITHIC SILICON										
	APPROVED BY <i>William K. Beckman</i>											
	DRAWING APPROVAL DATE 05 AUGUST 1988	SIZE A	CAGE CODE 67268	5962-88693								
	REVISION LEVEL A	SHEET 1 OF 9										

DESC FORM 193
SEP 87

• U.S. GOVERNMENT PRINTING OFFICE: 1987 - 748-129/60911


5962-E1453-2

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

1. SCOPE

1.1 Scope. This drawing describes device requirements for class B microcircuits in accordance with 1.2.1 of MIL-STD-883, "Provisions for the use of MIL-STD-883 in conjunction with compliant non-JAN devices".

1.2 Part number. The complete part number shall be as shown in the following example:

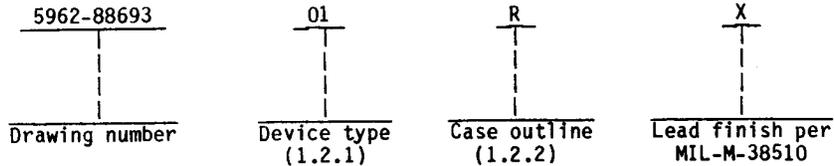

1.2.1 Device type. The device type shall identify the circuit function as follows:

Device type	Generic number	Circuit function
01	54ALS804	Hex 2-input NAND drivers

1.2.2 Case outlines. The case outlines shall be as designated in appendix C of MIL-M-38510, and as follows:

Outline letter	Case outline
R	D-8 (20-lead, 1.060" x .310" x .200"), dual-in-line package
S	F-9 (20-lead, .540" x .300" x .100"), flat package
2	C-2 (20-terminal, .358" x .358" x .100), square chip carrier package

1.3 Absolute maximum ratings.

Supply voltage range - - - - -	-0.5 V dc minimum to +7.0 V dc maximum
Input voltage range - - - - -	-1.2 V dc at -18 mA to +7.0 V dc
Storage temperature range - - - - -	-65°C to +150°C
Lead temperature (soldering, 10 seconds) - - - - -	+300°C
Junction temperature (T _J) - - - - -	+175°C
Maximum power dissipation (P _D) 1/ - - - - -	66 mW
Thermal resistance, junction-to-case (θ _{JC}) - - - - -	See MIL-M-38510, appendix C

1.4 Recommended operating conditions.

Supply voltage (V _{CC}) - - - - -	+4.5 V dc minimum to +5.5 V dc maximum
Minimum high level input voltage (V _{IH}) - - - - -	2.0 V dc
Maximum low level input voltage (V _{IL}):	
T _C = +125°C - - - - -	0.7 V dc
T _C = -55°C - - - - -	0.8 V dc
T _C = +25°C - - - - -	0.8 V dc
High level output current (I _{OH}) - - - - -	-12 mA
Low level output current (I _{OL}) - - - - -	12 mA
Case operating temperature range (T _C) - - - - -	-55°C to +125°C

1/ Maximum power dissipation is defined as V_{CC} x I_{CC}, and the device must withstand the added P_D due to the output short circuit test, e.g., I_O.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A	5962-88693
	REVISION LEVEL	SHEET 2

2. APPLICABLE DOCUMENTS

2.1 Government specification, standard, and bulletin. Unless otherwise specified, the following specification, standard, and bulletin of the issue listed in that issue of the Department of Defense Index of Specifications and Standards specified in the solicitation, form a part of this drawing to the extent specified herein.

SPECIFICATION

MILITARY

MIL-M-38510 - Microcircuits, General Specification for.

STANDARD

MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.

BULLETIN

MILITARY

MIL-BUL-103 - List of Standardized Military Drawings (SMD'S).

(Copies of the specification, standard, and bulletin required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing shall take precedence.

3. REQUIREMENTS

3.1 Item requirements. The individual item requirements shall be in accordance with 1.2.1 of MIL-STD-883, "Provisions for the use of MIL-STD-883 in conjunction with compliant non-JAN devices" and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-M-38510 and herein.

3.2.1 Terminal connections. The terminal connections shall be as specified on figure 1.

3.2.2 Truth table. The truth table shall be as specified on figure 2.

3.2.3 Test circuit and switching waveforms. The test circuit and switching waveforms shall be as specified on figure 3.

3.2.4 Case outlines. The case outlines shall be in accordance with 1.2.2 herein.

3.3 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in table I and apply over the full case operating temperature range.

3.4 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table I.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A		5962-88693
		REVISION LEVEL A	SHEET 3

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions -55°C < T _C < +125°C unless otherwise specified	1/ Group A subgroups	Limits		Unit	
				Min	Max		
High level output voltage	V _{OH}	V _{CC} = 4.5 V V _{IH} = 2.0 V V _{IL} : +25°C = 0.8 V -55°C = 0.8 V +125°C = 0.7 V 2/	I _{OH} = -0.4 mA	1, 2, 3	2.5	V	
			I _{OH} = -3.0 mA	1, 2, 3	2.4		
			I _{OH} = -12 mA	1, 2, 3	2		
Low level output voltage	V _{OL}	V _{CC} = 4.5 V V _{IH} = 2.0 V I _{OL} = 12 mA 2/	V _{IL} = 0.8 V	1,3	0.4	V	
			V _{IL} = 0.7 V	2			
Input clamp voltage	V _{IC}	V _{CC} = 4.5 V I _{IN} = -18 mA		1, 2, 3	-1.2	V	
Low level input current	I _{IL}	V _{CC} = 5.5 V, unused inputs = 4.5 V V _{IN} = 0.4 V		1, 2, 3	-0.1	mA	
High level input current	I _{IH1}	V _{CC} = 5.5 V unused inputs = 0.0 V	V _{IN} = 2.7 V	1, 2, 3	20	μA	
	I _{IH2}		V _{IN} = 7.0 V	1, 2, 3	0.1	mA	
Output current	I _O	V _{CC} = 5.5 V V _{OUT} = 2.25 V	3/	1, 2, 3	-30	-112	mA
Supply current	I _{CCH}	V _{CC} = 5.5 V	V _{IN} = 0.0 V	1, 2, 3	2.5	mA	
	I _{CCL}		V _{IN} = 4.5 V	1, 2, 3	12	mA	
Functional tests		See 4.3.1c 4/		7, 8			
Propagation delay time, from A, B to Y	t _{PLH}	V _{CC} = 4.5 V to 5.5 V C _L = 50 pF R _L = 500Ω See figure 3 5/		9, 10, 11	1	9	ns
	t _{PHL}				1	9	

See footnotes on next page.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A	5962-88693
	REVISION LEVEL	SHEET 4

DESC FORM 193A
SEP 87

* U. S. GOVERNMENT PRINTING OFFICE 1988-546-904

- 1/ Unused inputs that do not directly control the pin under test must be ≥ 2.5 V dc or < 0.4 V dc. No unused inputs shall exceed 5.5 V dc or go less than 0.0 V dc. No inputs shall be floated.
- 2/ All outputs must be tested. In the case where only one input at V_{IL} maximum or V_{IH} minimum produces the proper output state, the test must be performed with each input being selected as the V_{IL} maximum or V_{IH} minimum input.
- 3/ The output conditions have been chosen to produce a current that closely approximates one half of the true short circuit output current, I_{OS} . Not more than one output will be tested at one time and the duration of the test condition shall not exceed one second.
- 4/ Functional tests shall be conducted at input test conditions of $GND \leq V_{IL} \leq V_{OL}$ and $V_{OH} \leq V_{IH} \leq V_{CC}$.
- 5/ Propagation delay limits are based on single output switching. Unused inputs = 3.5 V dc or < 0.3 V dc.

3.5 **Marking.** Marking shall be in accordance with MIL-STD-883 (see 3.1 herein). The part shall be marked with the part number listed in 1.2 herein. In addition, the manufacturer's part number may also be marked as listed in MIL-BUL-103 (see 6.6 herein).

3.6 **Certificate of compliance.** A certificate of compliance shall be required from a manufacturer in order to be listed as an approved source of supply in MIL-BUL-103 (see 6.6 herein). The certificate of compliance submitted to DESC-ECC prior to listing as an approved source of supply shall affirm that the manufacturer's product meets the requirements of MIL-STD-883 (see 3.1 herein) and the requirements herein.

3.7 **Certificate of conformance.** A certificate of conformance as required in MIL-STD-883 (see 3.1 herein) shall be provided with each lot of microcircuits delivered to this drawing.

3.8 **Notification of change.** Notification of change to DESC-ECC shall be required in accordance with MIL-STD-883 (see 3.1 herein).

3.9 **Verification and review.** DESC, DESC's agent, and the acquiring activity retain the option to review the manufacturer's facility and applicable required documentation. Offshore documentation shall be made available onshore at the option of the reviewer.

4. QUALITY ASSURANCE PROVISIONS

4.1 **Sampling and inspection.** Sampling and inspection procedures shall be in accordance with section 4 of MIL-M-38510 to the extent specified in MIL-STD-883 (see 3.1 herein).

4.2 **Screening.** Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to quality conformance inspection. The following additional criteria shall apply:

- a. Burn-in test, method 1015 of MIL-STD-883.
 - (1) Test condition A, C, or D using the circuit submitted with the certificate of compliance (see 3.6 herein).
 - (2) $T_A = +125^\circ\text{C}$, minimum.
- b. Interim and final electrical test parameters shall be as specified in table II herein, except interim electrical parameter tests prior to burn-in are optional at the discretion of the manufacturer.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A		5962-88693
		REVISION LEVEL A	SHEET 5

DESC FORM 193A
SEP 87

☆ U. S. GOVERNMENT PRINTING OFFICE: 1988-550-547

Device type	01
Case outlines	R, S, and 2
Terminal number	Terminal symbol
1	1A
2	1B
3	1Y
4	2A
5	2B
6	2Y
7	3A
8	3B
9	3Y
10	GND
11	4Y
12	4A
13	4B
14	5Y
15	5A
16	5B
17	6Y
18	6A
19	6B
20	V _{CC}

FIGURE 1. Terminal connections.

Inputs		Output
A	B	Y
H	H	L
L	X	H
X	L	H

H = High voltage level
L = Low voltage level
X = Irrelevant



FIGURE 2. Truth table.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A	5962-88693
	REVISION LEVEL	SHEET 6

DESC FORM 193A
SEP 87

U. S. GOVERNMENT PRINTING OFFICE: 1968-349-804

FROM OUTPUT
UNDER TEST

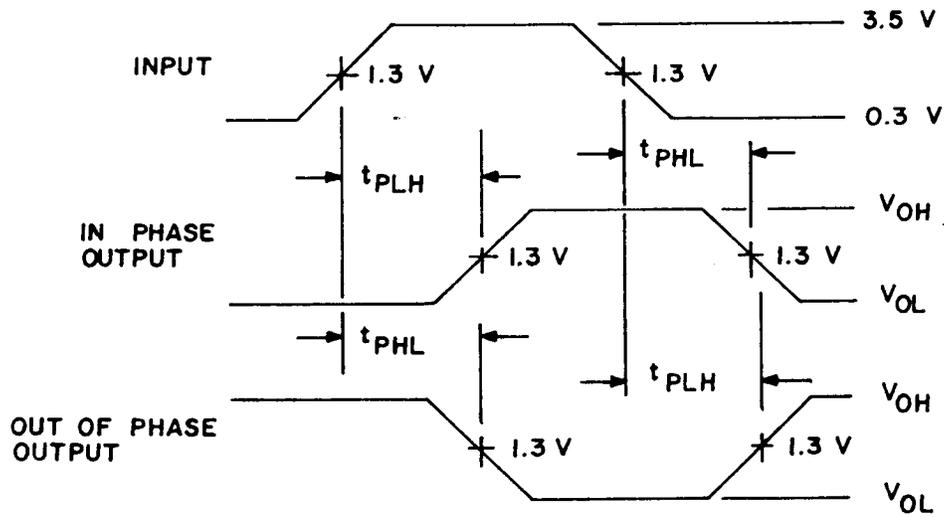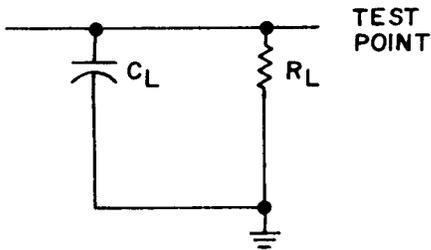

NOTES:

1. C_L includes probe and jig capacitance.
2. All input pulses have the following characteristics: $PRR \leq 10$ MHz, duty cycle = 50%, $t_r = t_f = 3$ ns ± 1 ns.
3. The outputs are measured one at a time with one input transition per measurement.

FIGURE 3. Test circuit and switching waveforms.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A		5962-88693
		REVISION LEVEL	SHEET 7

DESC FORM 193A
SEP 87

U. S. GOVERNMENT PRINTING OFFICE: 1988-549-904

4.3 Quality conformance inspection. Quality conformance inspection shall be in accordance with method 5005 of MIL-STD-883 including groups A, B, C, and D inspections. The following additional criteria shall apply.

4.3.1 Group A inspection.

- a. Tests shall be as specified in table II herein.
- b. Subgroups 4, 5, and 6 in table I, method 5005 of MIL-STD-883 shall be omitted.
- c. Subgroups 7 and 8 shall verify the truth table as specified on figure 2 herein.

4.3.2 Groups C and D inspections.

- a. End-point electrical parameters shall be as specified in table II herein.
- b. Steady-state life test conditions, method 1005 of MIL-STD-883.
 - (1) Test condition A, C, or D using the circuit submitted with the certificate of compliance (see 3.6 herein).
 - (2) $T_A = +125^\circ\text{C}$, minimum.
 - (3) Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (per method 5005, table I)
Interim electrical parameters (method 5004)	--
Final electrical test parameters (method 5004)	1*,2,3,7,8,9, 10,11
Group A test requirements (method 5005)	1,2,3,7,8,9, 10,11
Groups C and D end-point electrical parameters (method 5005)	1,2,3

*PDA applies to subgroup 1.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-38510.

6. NOTES

6.1 Intended use. Microcircuits conforming to this drawing are intended for use when military specifications do not exist and qualified military devices that will perform the required function are not available for OEM application. When a military specification exists and the product covered by this drawing has been qualified for listing on QPL-38510, the device specified herein will be inactivated and will not be used for new design. The QPL-38510 product shall be the preferred item for all applications.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A	5962-88693	
	REVISION LEVEL A		SHEET 8

DESC FORM 193A
SEP 87

U. S. GOVERNMENT PRINTING OFFICE: 1988-549-804

6.2 Replaceability. Microcircuits covered by this drawing will replace the same generic device covered by a contractor-prepared specification or drawing.

6.3 Configuration control of SMD's. All proposed changes to existing SMD's will be coordinated with the users of record for the individual documents. This coordination will be accomplished in accordance with MIL-STD-481 using DD Form 1693, Engineering Change Proposal (Short Form).

6.4 Record of users. Military and industrial users shall inform Defense Electronics Supply Center when a system application requires configuration control and the applicable SMD. DESC will maintain a record of users and this list will be used for coordination and distribution of changes to the drawings. Users of drawings covering microelectronics devices (FSC 5962) should contact DESC-ECC, telephone (513) 296-6022.

6.5 Comments. Comments on this drawing should be directed to DESC-ECC, Dayton, Ohio 45444, or telephone 513-296-8525.

6.6 Approved sources of supply. Approved sources of supply are listed in MIL-BUL-103. Additional sources will be added as they become available. The vendors listed in MIL-BUL-103 have agreed to this drawing and a certificate of compliance (see 3.6 herein) has been submitted to and accepted by DESC-ECC. The approved sources of supply listed below are for information purposes only and are current only to the date of the last action of this document.

Military drawing part number	Vendor CAGE number	Vendor 1/ similar part number
5962-8869301RX	01295 27014	SNJ54ALS804AJ 54ALS804AJ/883
5962-8869301SX	01295 27014	SNJ54ALS804AW 54ALS804AW/883
5962-88693012X	01295 27014	SNJ54ALS804AFK 54ALS804AE/883

1/ Caution. Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.

Vendor CAGE number

01295

27014

Vendor name and address

Texas Instruments, Incorporated
13500 N. Central Expressway
P.O. Box 655303
Dallas, TX 75265
Point of contact: I-20 at FM 1788
Midland TX 79711-0448

National Semiconductor
2900 Semiconductor Drive
P.O. Box 58090
Santa Clara CA 95052-8090
Point of contact: 333 Western Avenue
South Portland ME 04016

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A	5962-88693
	REVISION LEVEL A	SHEET 9

DESC FORM 193A
SEP 87

☆ U. S. GOVERNMENT PRINTING OFFICE: 1988--550 547