

PRODUCT SPECIFICATION

DATE:05/14/2007

| | | | |
|---|---------------------------------|--------------|-----------|
| cosmo ELECTRONICS CORPORATION | Photocoupler : KP2210 | NO.60P01020 | REV. 2 |
| | | SHEET 1 OF 6 | |

High Reliability Photocoupler

●Features

- 1.Current transfer ratio (CTR : 50~600% at $I_F=5mA$ $V_{ce}=5V$)
- 2.High isolation voltage between input and output (Viso : 5000Vrms).
- 3.Compact dual-in-line package.

●Applications


1. Registers, copiers, automatic vending machines.
2. System appliances, measuring instruments.
3. Computer terminals, programmable controllers.
4. Communications, telephone, etc.
5. Electric home appliances, such as oil fan heaters, Microwave oven , Washer, Refrigerator, Air conditioner, etc.
6. Medical instruments, physical and chemical equipment.
7. Signal transmission between circuits of different potentials and impedances.
8. Facsimile equipment, Audio, Video
9. Switching power supply, Laser beam printer.

PRODUCT SPECIFICATION

DATE: 05/14/2007


| | | | |
|---|----------------|--------------|------|
| cosmo ELECTRONICS CORPORATION | Photocoupler : | NO.60P01020 | REV. |
| | KP2210 | SHEET 2 OF 6 | 2 |

1. OUTSIDE DIMENSION : UNIT (mm)

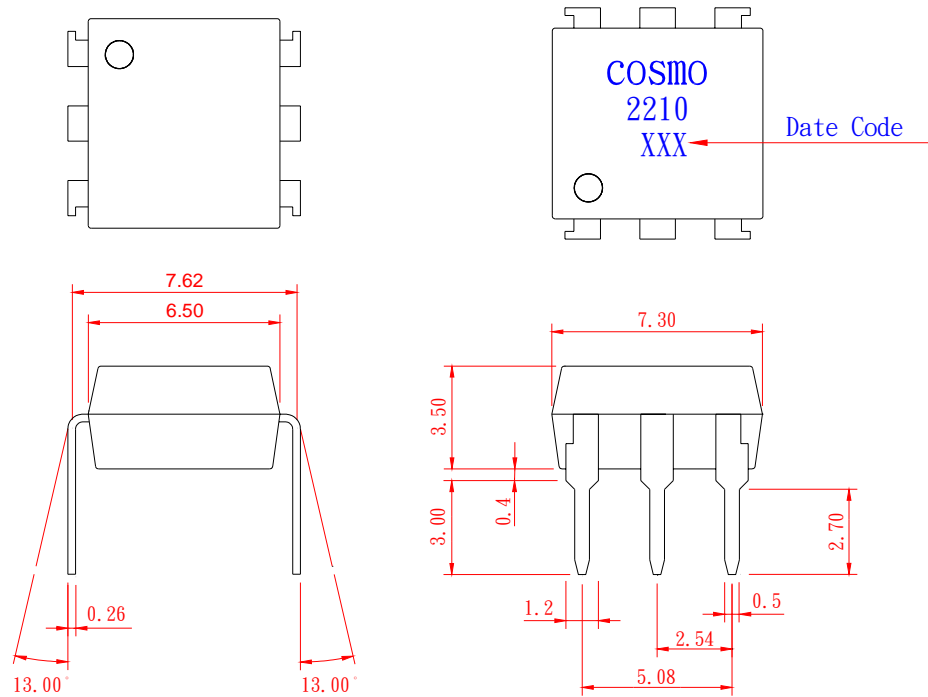

TOLERANCE : $\pm 0.2\text{mm}$

2. SCHEMATIC : TOP VIEW



- 1. Anode
- 2. Cathode
- 3. NC
- 4. Emitter
- 5. Collector
- 6. Base

PRODUCT SPECIFICATION

DATE: 05/14/2007

| | | | |
|---|----------------|--------------|-----------|
| cosmo ELECTRONICS CORPORATION | Photocoupler : | NO.60P01020 | REV. 2 |
| | KP2210 | SHEET 3 OF 6 | |


● Absolute Maximum Ratings

| Parameter | | Symbol | Rating | Unit |
|---------------------------------|-----------------------------|-----------|-------------|------|
| Input | Forward current | I_F | 50 | mA |
| | Peak forward current | I_{FM} | 1 | A |
| | Reverse voltage | V_R | 6 | V |
| | Power dissipation | P_D | 70 | mW |
| Output | Collector-emitter voltage | V_{CEO} | 350 | V |
| | Emitter-collector voltage | V_{ECO} | 7 | V |
| | Collector current | I_C | 50 | mA |
| | Collector power dissipation | P_C | 150 | mW |
| Total power dissipation | | P_{tot} | 200 | mW |
| Isolation voltage 1 minute | | V_{iso} | 5000 | Vrms |
| Operating temperature | | T_{opr} | -55 to +115 | °C |
| Storage temperature | | T_{stg} | -55 to +125 | °C |
| Soldering temperature 10 second | | T_{sol} | 260 | °C |

● Electro-optical Characteristics

| Parameter | | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|--------------------------|--------------------------------------|---------------|-----------------------------------|--------------------|-----------|------|------|
| Input | Forward voltage | V_F | $I_F=10mA$ | 1.0 | 1.2 | 1.3 | V |
| | Peak forward voltage | V_{FM} | $I_{FM}=0.5A$ | - | - | 3.0 | V |
| | Reverse current | I_R | $V_R=5V$ | - | - | 10 | uA |
| | Terminal capacitance | C_t | $V=0, f=1MHz$ | - | 30 | - | pF |
| Output | Collector dark current | I_{CEO} | $V_{CE}=300V$ | - | 10 | 200 | nA |
| Transfer characteristics | Current transfer ratio | CTR | $I_F=5mA, V_{CE}=5V$ | 50 | - | 600 | % |
| | Collector-emitter saturation voltage | $V_{CE(sat)}$ | $I_F=8mA, I_C=2.4mA$ | - | - | 0.4 | V |
| | Isolation resistance | R_{iso} | DC500V | 5×10^{10} | 10^{11} | - | ohm |
| | Floating capacitance | C_f | $V=0, f=1MHz$ | - | 0.6 | 1.0 | pF |
| | Cut-off frequency | f_c | $V_{CC}=5V, I_C=2mA, R_L=100ohm$ | - | 80 | - | kHz |
| | Response time (Rise) | t_r | $V_{CC}=10V, I_C=2mA, R_L=100ohm$ | - | 2 | - | us |
| | Response time (Fall) | t_f | | - | 3 | - | us |

Fig. 1 Current Transfer Ratio Vs. Forward Current

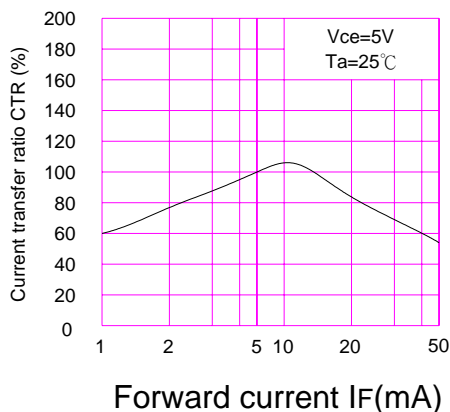


PRODUCT SPECIFICATION

DATE: 05/14/2007


| | | | |
|---|----------------|--------------|-----------|
| cosmo ELECTRONICS CORPORATION | Photocoupler : | NO.60P01020 | REV. 2 |
| | KP2210 | SHEET 4 OF 6 | |

Fig.2 Collector Power Dissipation vs. Ambient Temperature

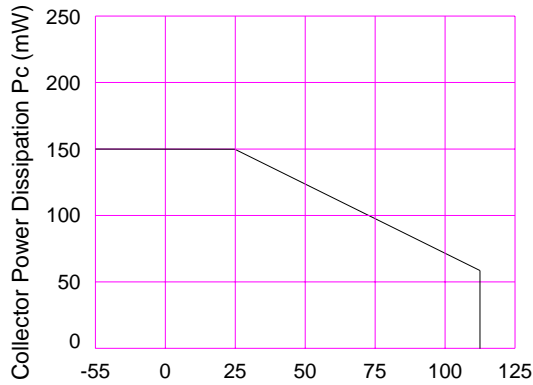


Ambient Temperature T_a (°C)

Fig.3 Collector Dark Current vs. Ambient Temperature

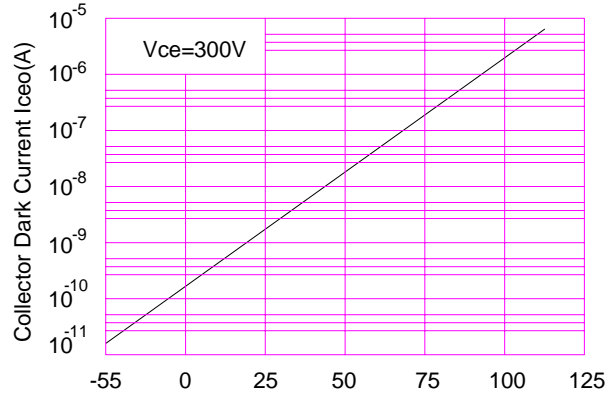

Ambient Temperature T_a (°C)

Fig.4 Forward Current vs. Ambient Temperature

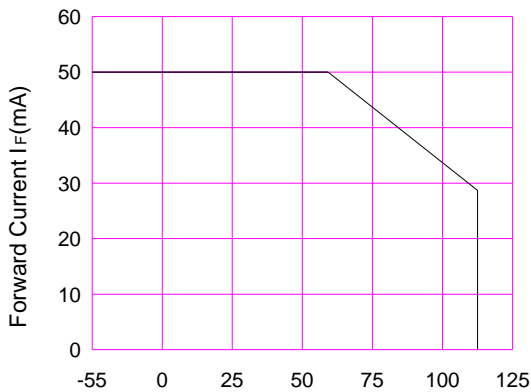

Ambient temperature T_a (°C)

Fig.5 Forward Current vs. Forward Voltage

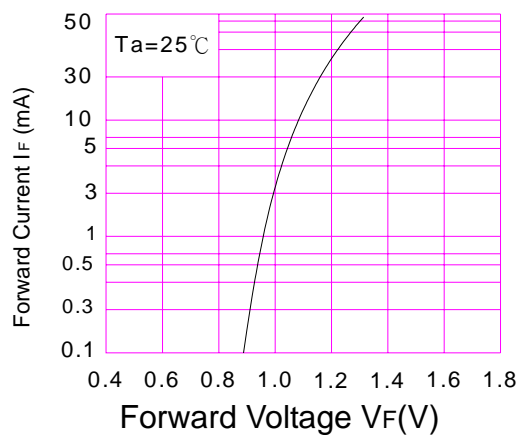


Fig.6 Collector Current vs. Collector-emitter Voltage


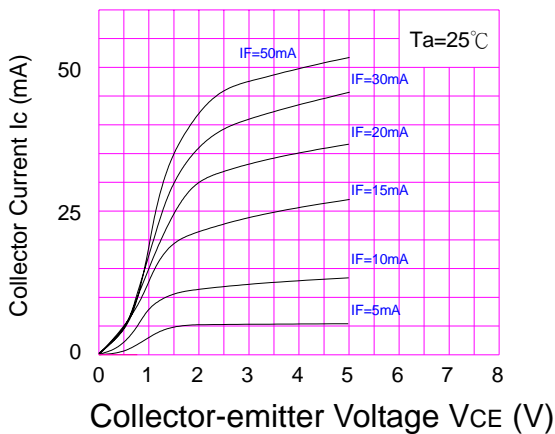


Fig.7 Relative Current Transfer Ratio vs. Ambient Temperature

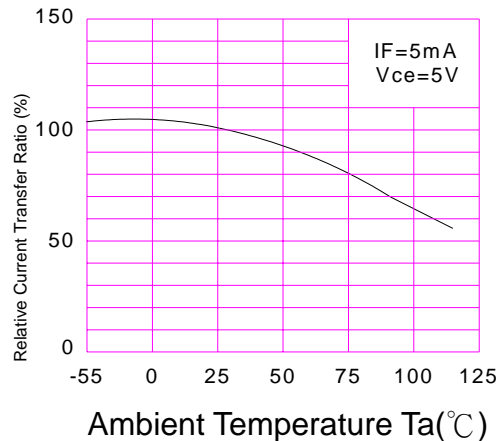

PRODUCT SPECIFICATION

DATE: 05/14/2007

| | | | |
|---|---------------------------------|--------------|-----------|
| cosmo ELECTRONICS CORPORATION | Photocoupler : KP2210 | NO.60P01020 | REV. 2 |
| | | SHEET 5 OF 6 | |

Fig.8 Collector-emitter Saturation Voltage vs. Ambient Temperature

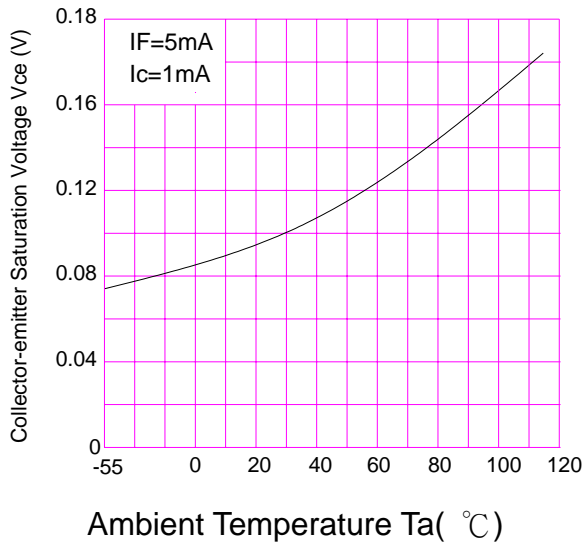


Fig.9 Collector-emitter Saturation Voltage vs. Forward Current

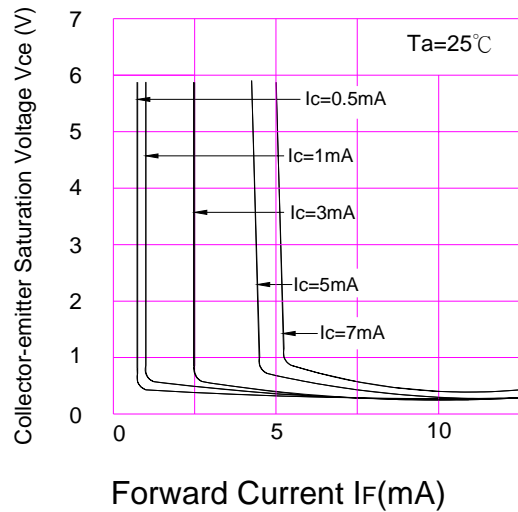


Fig.10 Response Time vs. Load Resistance


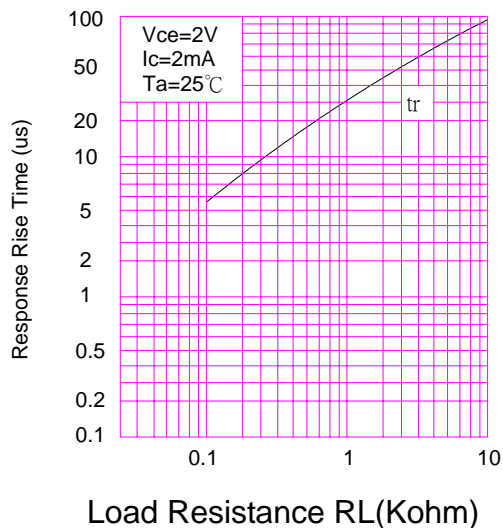


Fig.11 Response Time vs. Load Resistance

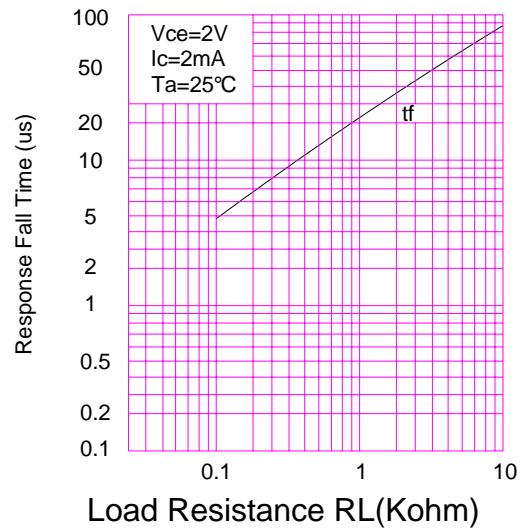

PRODUCT SPECIFICATION

DATE: 05/14/2007

| | | | |
|---|---------------------------------|--------------|-----------|
| cosmo ELECTRONICS CORPORATION | Photocoupler : KP2210 | NO.60P01020 | REV. 2 |
| | | SHEET 6 OF 6 | |

NOTICE

The information contained in this document is a general product description and is subject to change without notice. Please contact cosmo in order to obtain the latest device data sheets before using any cosmo device. Cosmo does not assume any responsibility for use of any circuitry described. No circuit patent licenses are implied. This publication is the property of cosmo. No part of this publication may be reproduced or copied in any form or by any means, or transferred to any third party without the prior written consent of cosmo Electronics Corporation.

The devices listed in this document are designed for general applications only in electronic equipment. No devices shall be deployed which require higher level of reliability such as:

- Medical and other life support equipments.
- Space application.
- Telecommunication equipment (trunk lines).
- Nuclear power control equipment.

Unless it received prior written approval from cosmo.

cosmo takes no responsibility for damages arise form the improper usage of our device. Please contact cosmo for further information regarding the above notices.