


4 X 80A Schottky Barrier Rectifier

SPB8080 – SPB80100

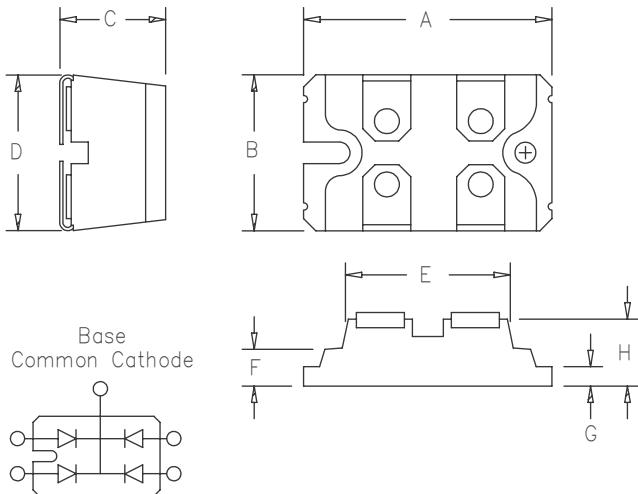

Dim.	Inches		Millimeter		
	Minimum	Maximum	Minimum	Maximum	Notes
A	1.494	1.504	37.95	38.20	
B	0.976	0.986	24.79	25.04	
C	0.472	0.480	12.00	12.24	
D	0.990	1.000	25.15	25.40	
E	1.049	1.059	26.67	26.90	
F	0.164	0.174	4.16	4.42	
G	0.080	0.084	2.03	2.13	
H	0.372	0.378	9.45	9.60	

SOT-227

Microsemi
Catalog Number

Working Peak
Reverse Voltage

Repetitive Peak
Reverse Voltage

SPB8080
SPB8090
SPB80100

80V
90V
100V

80V
90V
100V

- Common Cathode Base
- Low Forward Voltage Drop
- 4 Schottky Rectifiers in one pkg.
- 80–100V @ 80A/leg
- Low Switching losses
- ROHS Compliant

Electrical Characteristics

Average forward current per leg
Average forward current per package
Maximum surge current per leg
Maximum repetitive reverse current per leg
Max peak forward voltage per leg
Max peak reverse current per leg
Typical junction capacitance per leg

$I_F(AV)$ 80 Amps
 $I_F(AV)$ 320 Amps
 I_{FSM} 1250 Amps
 $I_{R(OV)}$ 2 Amps
 V_{FM} 0.90 Volts
 I_{RM} 3 mA
 C_J 2400 pF

$T_C = 129^\circ\text{C}$ Square wave
 $T_C = 129^\circ\text{C}$ Square wave
8.3ms, half sine, $T_J = 175^\circ\text{C}$
 $f = 1 \text{ KHz}, 25^\circ\text{C}, 1\mu\text{sec square wave}$
 $I_{FM} = 80\text{A}; T_J = 25^\circ\text{C}^*$
 $V_{RRM}, T_J = 25^\circ\text{C}^*$
 $V_R = 5.0\text{V}, T_J = 25^\circ\text{C}$

*Pulse test: Pulse width 300 μ sec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range
Operating junction temp range
Max thermal resistance per leg
Max thermal resistance per pkg
Mounting Torque
Weight

T_{STG}
 T_J
 $R_{\theta JC}$
 $R_{\theta JC}$

-55°C to 175°C
-55°C to 175°C
0.60°C/W
0.15°C/W
9–13 inch pounds
1.1 ounces (30 grams) typical

SPB8080 – SPB80100

Figure 1
Typical Forward Characteristics – Per Leg

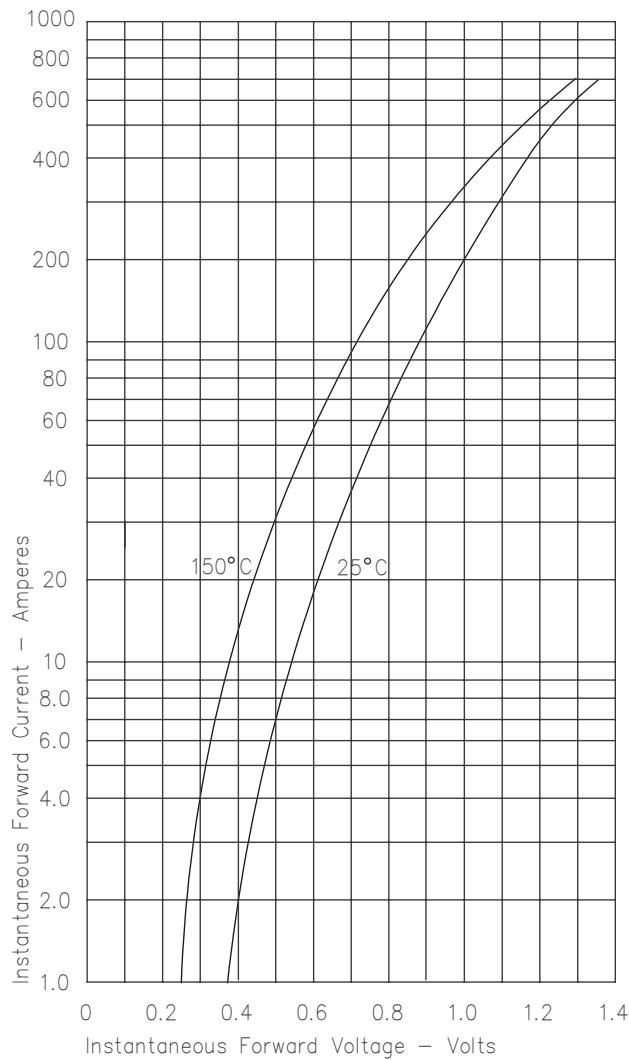


Figure 2
Typical Reverse Characteristics – Per Leg

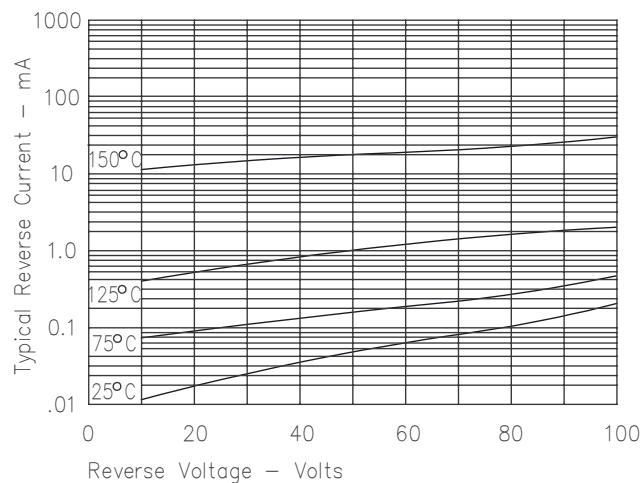


Figure 3
Typical Junction Capacitance – Per Leg

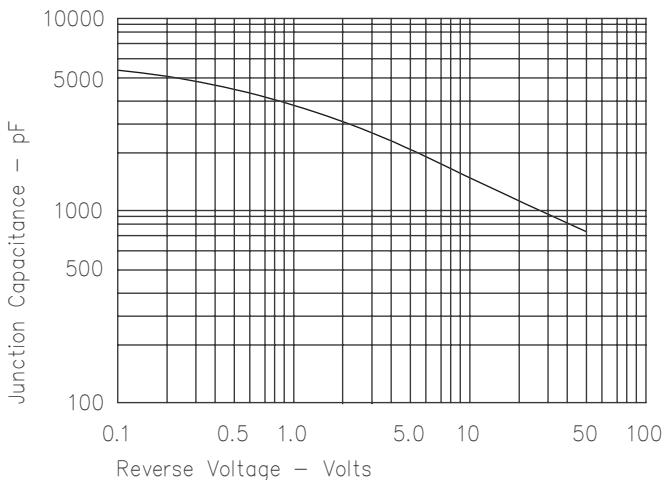


Figure 4
Forward Current Derating – Per Leg

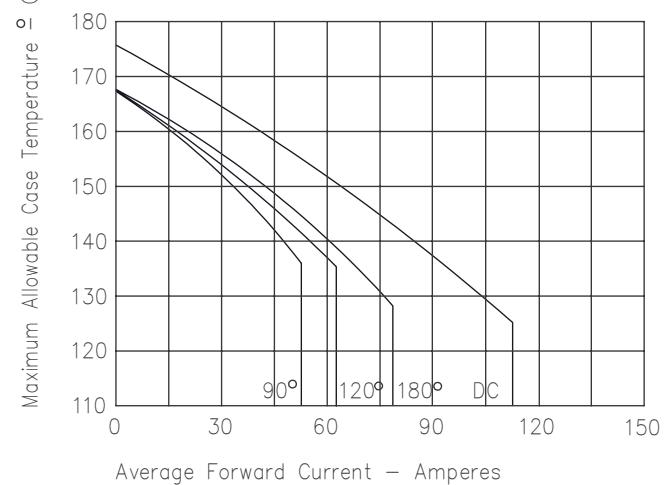


Figure 5
Maximum Forward Power Dissipation – Per Leg

