






0705 STRAIN-RELIEF BUSHING



Chassis Thickness

- Material: UL approved Nylon 66, 94V-2 (Black)
 - Cust assembly cost, prolongs cord life.
- Used extensively for protecting cords of computer, apparatus...etc.




CORD ASSEMBLY

E98707

Item No.	Cross Section Shape	Wires Accomodate		Mounting Hole		Part L D	Max. Chassis Thickness F	Packing
		U.L. Wire	Size	A	B			
SR-F21 RJ	FLAT	SPT-1	2.3×4.5 2.8×5.3	9.5	8.7	10.3	0.5 ~ 1.6	1000pcs
SR-F23 RJ		SPT-1	2.3×4.5 2.8×5.3	9.5	8.7	10.3	1.8 ~ 3.2	
SR-F31		SPT-1	3.0×5.6	11.0	9.9	10.3	1.0 ~ 1.6	
SR-F32 RJ		SPT-1 SP×1	3.0×5.6	11.0	9.9	10.3	1.9 ~ 2.5	
SR-F41 RJ		SPT-218/2, 16/2	3.0×7.1 3.8×7.6	12.7	11.8	10.3	0.5 ~ 1.6	
SR-F42 RJ		SPT-2	3.0×7.1 3.8×7.6	12.7	11.8	10.3	1.8 ~ 2.5	
SR-F51		SPT-3	5×10.4	14.3	13.2	15.2	0.5 ~ 1.6	
SR-F53		SPT-3	5×10.4	13.2	13.0	15.2	1.8 ~ 3.5	
SR-5R1	581 902	SVI, SVT	6.2φ-7.4φ	12.7	11.5	11.0	0.5 ~ 1.6	
SR-5R2	581 914	SVI, SVT	6.2φ-7.4φ	12.7	11.5	11.0	1.8 ~ 2.5	
SR-6W2	581 926	SVI, SVT	7.6φ	12.7	11.8	11.0	1.8 ~ 2.3	
SR-6P1 RJ	ROUND 938 SJD 18/3, 16/2	SJC3C#18	7.4φ-8.2φ	15.9	14.0	14.8	0.5 ~ 1.6	
SR-6P3 RJ		SJC3C#18	7.4φ-8.2φ	15.9	14.0	14.8	1.9 ~ 3.2	
SR-6R1 RJ	581 951 963	SJ, SJT, 3C#16	8.2φ-9.2φ	15.9	14.0	14.8	0.5 ~ 1.6	
SR-6R3 RJ		SJ, SJT, 3C#16	8.2φ-9.2φ	15.9	14.0	14.8	1.9 ~ 3.2	
SR-7R1		SJT, 3C#14	9.2φ-10.5φ 11φ	19.0 19.8	16.5	19.0	0.5 ~ 1.6	
SR-7R3		SJT, 3C#14	9.2φ-10.5φ 11φ	19.0 19.8	16.5	19.0	1.9 ~ 3.2	
SR-8R3		SJT, 3C#12	12φ-15.2φ	22.2	21.3	20.6	1.9 ~ 3.2	
SR-9R1		20 ~ 30PCS#18	11φ-15φ	19.0	19.0	17.5	0.5 ~ 1.6	
SR-9R7		SJT, 3C#10	15.2φ-16.3φ 17.5φ	28.0 30.2	25.5	25.2	1.0 ~ 7.2	

0705A STRAIN RELIEF BUSHING ASSEMBLY TOOL

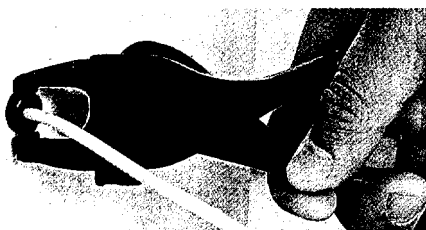

Item No. : KT-1 (STAINLESS)

Applicable:	SR-F21	SR-F23	SR-F31	SR-F32
Bushings	SR-F41	SR-F42	SR-F51	SR-F53
	SR-5R1	SR-5R2	SR-6W2	SR-6P1
	SR-6P3	SR-6R1	SR-6R3	SR-7R1
	SR-7R3	SR-8R3	SR-9R7	