



Micro Commercial Components

Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

MBR3020PT THRU MBR3060PT

30 Amp Schottky Barrier Rectifier 20 to 60 Volts

Features

- Guard Ring For Transient Protection
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Marking : type number
- Low Power Loss, High Efficiency

Maximum Ratings

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C



| MCC Part Number | Maximum Re current Peak Reverse Voltage | Maximum RMS Voltage | Maximum DC Blocking Voltage |
|-----------------|---|---------------------|-----------------------------|
| MBR3020PT | 20V | 14V | 20V |
| MBR3030PT | 30V | 21V | 30V |
| MBR3035PT | 35V | 24.5V | 35V |
| MBR3040PT | 40V | 28V | 40V |
| MBR3045PT | 45V | 31.5V | 45V |
| MBR3060PT | 60V | 42V | 60V |

Electrical Characteristics @ 25°C Unless Otherwise Specified

| | | | |
|---|-------------|------------------------------|--|
| Average Forward Current | $I_{F(AV)}$ | 30.0A | $T_C=125^\circ\text{C}$ |
| Peak Forward Surge Current | I_{FSM} | 200A | 8.3ms half sine |
| Maximum Instantaneous Forward Voltage MBR3020PT-3045PT MBR3060PT MBR3020PT-3045PT MBR3060PT | V_F | .63V .75V .76V .80V | $I_{FM} = 20.0A$ $T_A=25^\circ\text{C}$ $I_{FM} = 30.0A$ $T_A=25^\circ\text{C}$ |
| Maximum DC Reverse Current At Rated DC Blocking Voltage MBR3020PT-3045PT MBR3060PT MBR3020PT-3045PT MBR3060PT | I_R | 1mA 5mA 60mA 100mA | $T_C=25^\circ\text{C}$ $T_C=25^\circ\text{C}$ $T_C=125^\circ\text{C}$ $T_C=125^\circ\text{C}$ |
| Typical Junction Capacitance | C_j | 500pF | Measured at 1.0MHz, $V_R=4.0V$ |

Pulse test: Pulse width 300 usec, duty cycle 2%.

TO-247

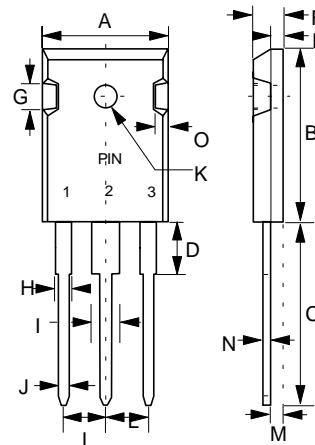

| DIM | DIMENSIONS | | | | NOTE |
|-----|------------|------|---------|-------|------|
| | INCHES | | MM | | |
| A | .620 | .640 | 15.75 | 16.25 | |
| B | .837 | .856 | 21.25 | 21.75 | |
| C | .772 | .791 | 19.60 | 20.10 | |
| D | .149 | .172 | 3.78 | 4.38 | |
| E | .074 | .082 | 1.88 | 2.08 | |
| F | .192 | .202 | 4.87 | 5.13 | |
| G | .173 TYP | | 4.4 TYP | | |
| H | .075 | .085 | 1.90 | 2.16 | |
| I | .115 | .127 | 2.93 | 3.22 | |
| J | .044 | .048 | 1.12 | 1.22 | |
| K | .114 | .126 | 2.90 | 3.20 | ∅ |
| L | .205 | .224 | 5.20 | 5.70 | |
| M | .083 | .095 | 2.10 | 2.40 | |
| N | .020 | .030 | 0.51 | 0.76 | |
| O | .076 | .086 | 1.93 | 2.18 | |

FIG.1 - FORWARD CURRENT DERATING CURVE

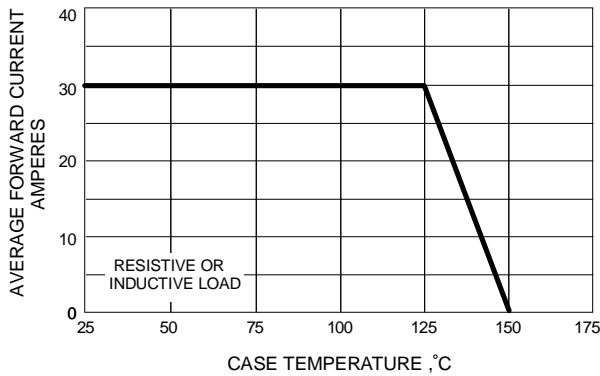


FIG.2 - MAXIMUM NON-REPETITIVE SURGE CURRENT

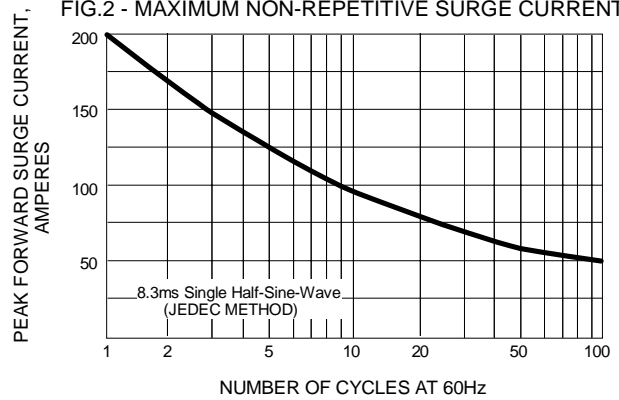


FIG.3 - TYPICAL REVERSE CHARACTERISTICS

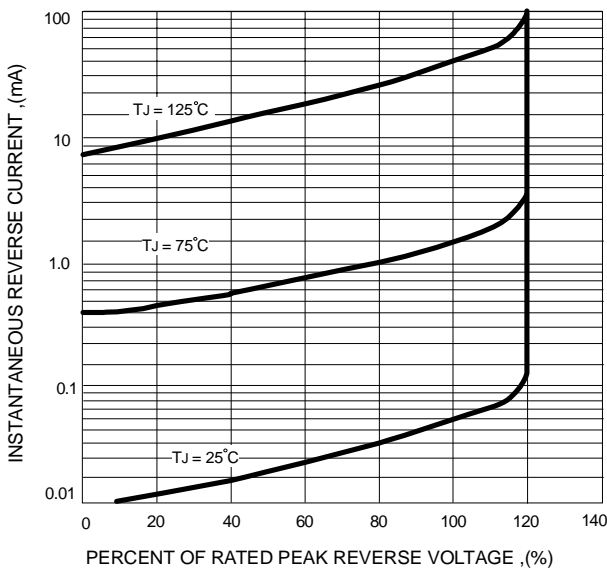


FIG.4 - TYPICAL FORWARD CHARACTERISTICS


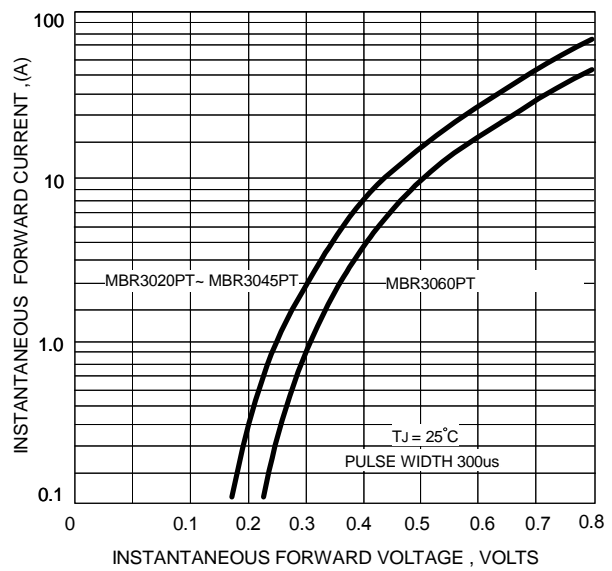


FIG.5 - TYPICAL JUNCTION CAPACITANCE



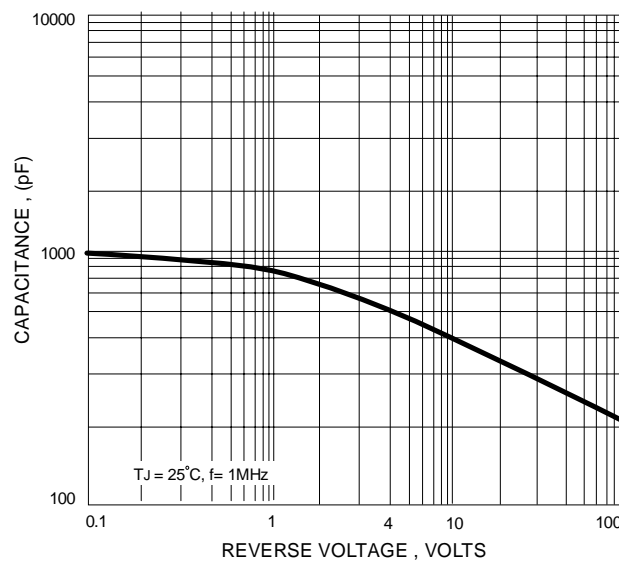

TM

Micro Commercial Components

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.