



## SAW Components

### SAW IF filter

Satellite radio

<b>Series/type:</b>	<b>B1729</b>
<b>Ordering code:</b>	<b>B39805B1729H810</b>
<b>Date:</b>	<b>December 27, 2006</b>
<b>Version:</b>	<b>2.1</b>

© EPCOS AG 2006. Reproduction, publication and dissemination of this data sheet, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.



**SAW Components**

**B1729**

**SAW IF filter**

**80.46 MHz**

**Data sheet**




**Application**

- IF filter for digital radio
- Usable bandwidth 3.7 MHz
- Low insertion attenuation
- Constant group delay
- Unbalanced or balanced operation




**Features**

- Package size 7.0 x 5.0 x 1.33 mm<sup>3</sup>
- Package code QCC12E
- Maximum package height 1.48 mm
- RoHS compatible
- Approximate weight 0.25 g
- Ceramic package for **Surface Mount Technology (SMT)**
- Ni, gold-plated terminals
- **Electrostatic Sensitive Device (ESD)**

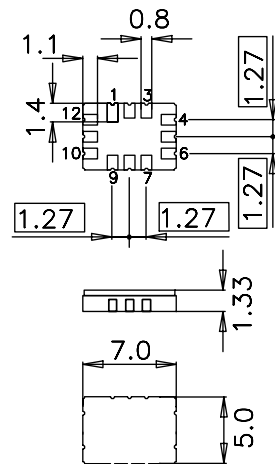

**Pin configuration**

- 4            Balanced input or input ground
- 6            Input
- 10          Balanced output or output ground
- 12          Output
- 1,5,7,11    Case – ground
- 2,3,8,9     To be grounded

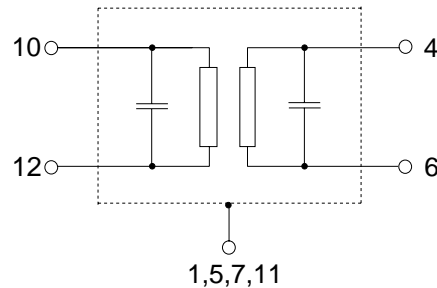

Please read *cautions and warnings and important notes* at the end of this document.



## SAW Components

B1729

## SAW IF filter

80.46 MHz

## Data sheet



## Characteristics

Temperature range for specification:	T = -40 °C to (+85 °C) +105 °C
Terminating source impedance:	Z <sub>S</sub> = 27 Ω and matching network
Terminating load impedance:	Z <sub>L</sub> = 1 kΩ and matching network

		min.	typ. @ 25 °C	max.	
<b>Nominal frequency</b>	f <sub>N</sub>	—	80.46	—	MHz
<b>Minimum insertion attenuation<sup>1)</sup></b>	α <sub>min</sub>	—	18.1	19.6	dB
<b>Maximum voltage gain source – load</b> (V <sub>L</sub> /V <sub>S</sub> )	α <sub>vgsL</sub>	-8.8	-7.3	—	dB
<b>Amplitude ripple (p-p)</b>	Δα				
	f <sub>N</sub> ± 1.84 MHz	—	0.9	(1.3) 1.8	dB
<b>Pass bandwidth</b>					
α <sub>rel</sub> ≤ 1.5 dB	B <sub>1.5dB</sub>	—	4.3	—	MHz
α <sub>rel</sub> ≤ 3 dB	B <sub>3dB</sub>	—	4.6	—	MHz
α <sub>rel</sub> ≤ 15 dB	B <sub>15dB</sub>	—	5.5	6.0	MHz
α <sub>rel</sub> ≤ 30 dB	B <sub>30dB</sub>	—	6.1	6.5	MHz
<b>Mean attenuation</b> (relative to α <sub>min</sub> )	α <sub>rel</sub>				
Upper sidelobe	86.47 ... 91.53 MHz	50.0	54.0	—	dB
<b>Relative attenuation</b> (relative to α <sub>min</sub> )	α <sub>rel</sub>				
Lower sidelobe	55.00 ... 67.00 MHz	48.0	54.0	—	dB
	67.00 ... 75.99 MHz	39.0	43.0	—	dB
Upper sidelobe	85.21 ... 86.47 MHz	40.0	49.0	—	dB
	86.47 ... 91.53 MHz	45.0	49.0	—	dB
	91.53 ... 95.21 MHz	46.0	52.0	—	dB
	95.21 ... 105.00 MHz	46.0	52.0	—	dB
<b>Group delay ripple (p-p)</b>	Δτ				
Aperture 50 kHz	f <sub>N</sub> ± 1.84 MHz	—	190	—	ns
<b>Temperature coefficient of frequency</b>	TC <sub>f</sub>	—	-18	—	ppm/K

1) Including losses in the matching network



SAW Components

B1729


SAW IF filter

80.46 MHz

Data sheet

SMD

Matching network<sup>1)</sup> ((based on four port measurement, quality factors  $Q_L = 40$ ,  $Q_C = 90$ ))

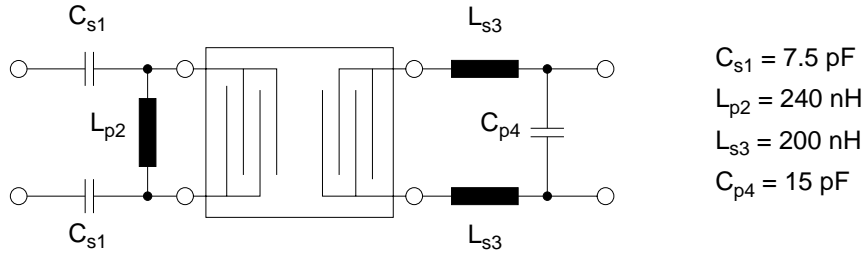

1) The input matching circuit has been designed as a power match of the filter's input port to 175  $\Omega$ . In a second step it has been optimized in a narrow range in order to operate at 27  $\Omega$  with optimum filter performance.



SAW Components

B1729


SAW IF filter

80.46 MHz


Data sheet



Transfer function

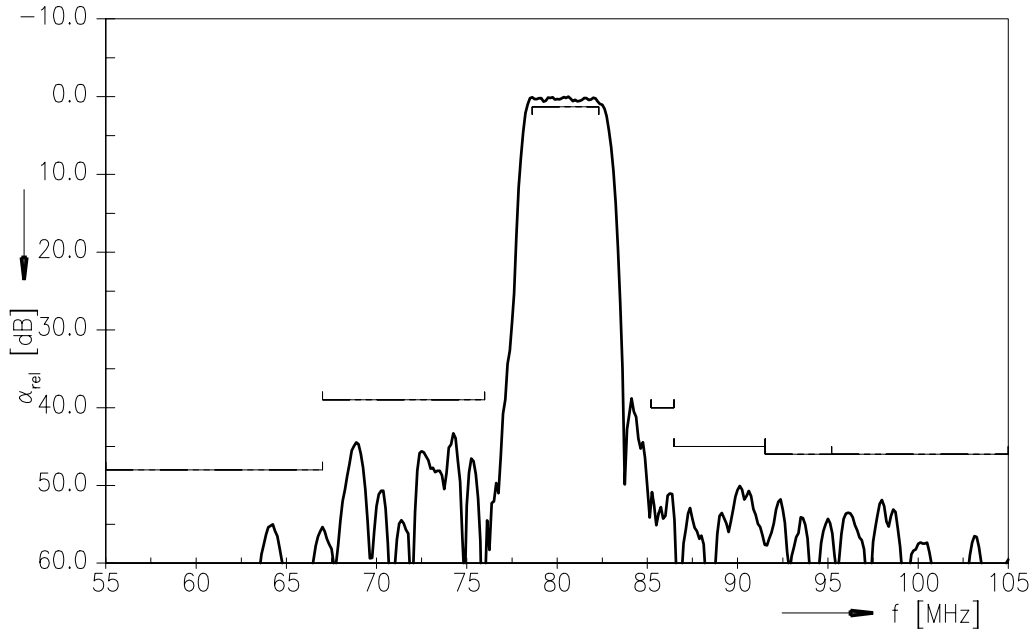

Transfer function (pass band)

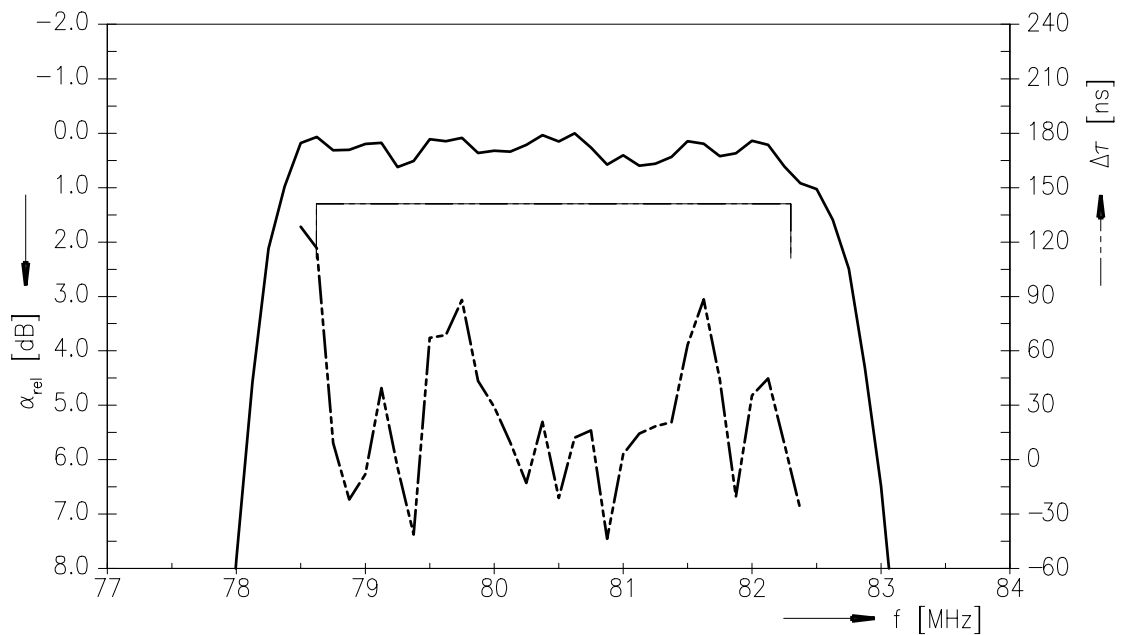

Please read cautions and warnings and important notes at the end of this document.



## SAW Components

B1729

## SAW IF filter

80.46 MHz

## Data sheet



## Characteristics

Temperature range for specification:	T = -40 °C to +85 °C
Terminating source impedance:	Z <sub>S</sub> = 50 Ω (single ended) and matching network
Terminating load impedance:	Z <sub>L</sub> = 50 Ω (single ended) and matching network

		min.	typ. @ 25 °C	max.	
<b>Nominal frequency</b>	f <sub>N</sub>	—	80.46	—	MHz
<b>Minimum insertion attenuation<sup>1)</sup></b>	α <sub>min</sub>	—	15.3	16.8	dB
<b>Amplitude ripple (p-p)</b>	Δα				
	f <sub>N</sub> ± 1.84 MHz	—	1.1	1.5	dB
<b>Pass bandwidth</b>					
α <sub>rel</sub> ≤ 1.5 dB	B <sub>1.5dB</sub>	—	4.3	—	MHz
α <sub>rel</sub> ≤ 3 dB	B <sub>3dB</sub>	—	4.6	—	MHz
α <sub>rel</sub> ≤ 15 dB	B <sub>15dB</sub>	—	5.5	6.0	MHz
α <sub>rel</sub> ≤ 30 dB	B <sub>30dB</sub>	—	6.2	6.6	MHz
<b>Mean attenuation (relative to α<sub>min</sub>)</b>	α <sub>rel</sub>				
Upper sidelobe	86.47 ... 91.53 MHz	46.0	48.0	—	dB
<b>Relative attenuation (relative to α<sub>min</sub>)</b>	α <sub>rel</sub>				
Lower sidelobe	55.00 ... 67.00 MHz	44.0	48.0	—	dB
	67.00 ... 75.99 MHz	34.0	37.0	—	dB
Upper sidelobe	85.21 ... 86.47 MHz	37.0	42.0	—	dB
	86.47 ... 91.53 MHz	40.0	44.0	—	dB
	91.53 ... 95.21 MHz	44.0	47.0	—	dB
	95.21 ... 105.00 MHz	45.0	48.0	—	dB
<b>Group delay ripple (p-p)</b>	Δτ				
Aperture 50 kHz	f <sub>N</sub> ± 1.84 MHz	—	180	—	ns
<b>Temperature coefficient of frequency</b>	TC <sub>f</sub>	—	-18	—	ppm/K

1) Including losses in the matching network



## SAW Components

B1729


## SAW IF filter

80.46 MHz

Data sheet



**Matching network** (based on four port measurement, quality factors  $Q_L = 40$ ,  $Q_C = 90$ )

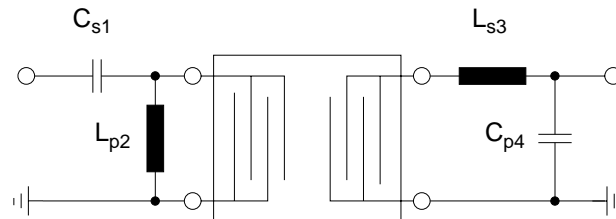

$$C_{s1} = 3.9 \text{ pF}$$

$$L_{p2} = 220 \text{ nH}$$

$$L_{s3} = 200 \text{ nH}$$

$$C_{p4} = 56 \text{ pF}$$

## Maximum ratings

Operable temperature range	T	-40 / +105	°C	
Storage temperature range	T <sub>stg</sub>	-40 / +105	°C	
DC voltage	V <sub>DC</sub>	0	V	
Source power	P <sub>S</sub>	10	dBm	source impedance 50 Ω



SAW Components

B1729


SAW IF filter

80.46 MHz


Data sheet



Transfer function

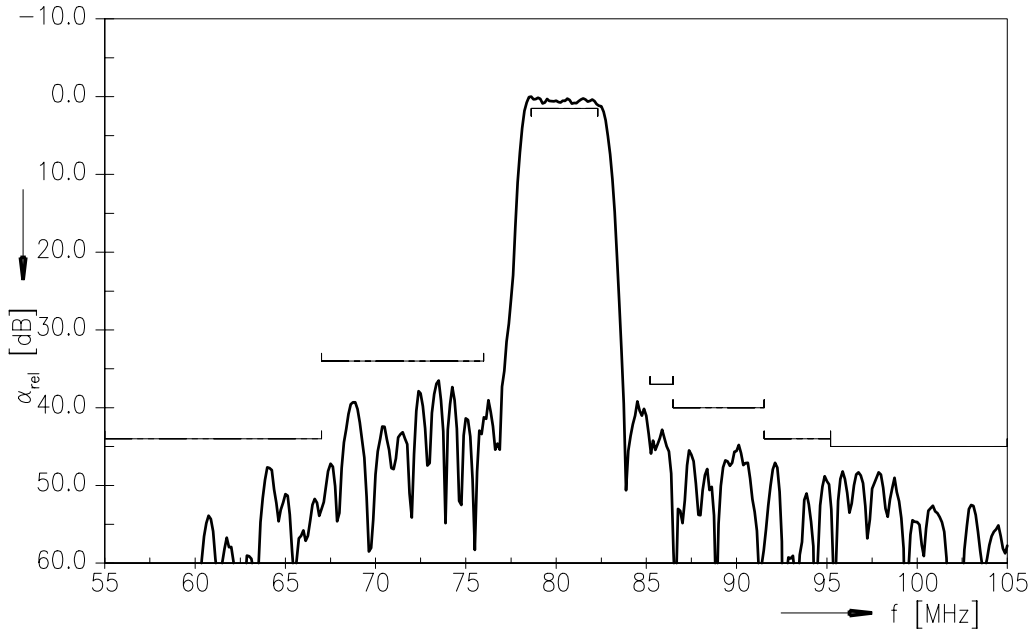

Transfer function (pass band)

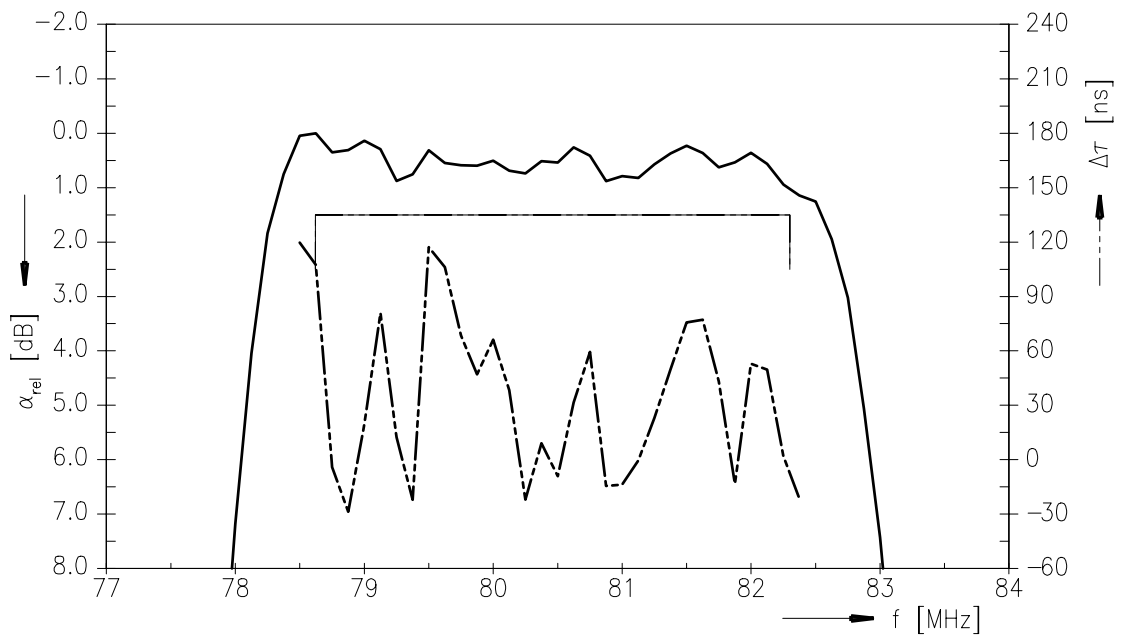

Please read cautions and warnings and important notes at the end of this document.





<b>SAW Components</b>	<b>B1729</b>
-----------------------	--------------

<b>SAW IF filter</b>	<b>80.46 MHz</b>
----------------------	------------------

Data sheet



## References

<b>Type</b>	B1729
<b>Ordering code</b>	B39805B1729H810
<b>Marking and package</b>	C61157-A7-A103
<b>Packaging</b>	F61074-V8170-Z000
<b>Date codes</b>	L_1126
<b>S-parameters</b>	B1729_NB_UN.s4p
<b>Soldering profile</b>	S_6001
<b>RoHS compatible</b>	defined as compatible with the following documents: "DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment. 2005/618/EC from April 18th, 2005, amending Directive 2002/95/EC of the European Parliament and of the Council for the purposes of establishing the maximum concentration values for certain hazardous substances in electrical and electronic equipment."

For further information please contact your local EPCOS sales office or visit our webpage at [www.epcos.com](http://www.epcos.com) .

**Published by EPCOS AG**  
**Surface Acoustic Wave Components Division**  
**P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2006. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.



## Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of passive electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of a passive electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of a passive electronic component.
3. The warnings, cautions and product-specific notes must be observed.
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as "hazardous")**. Useful information on this will be found in our Material Data Sheets on the Internet ([www.epcos.com/material](http://www.epcos.com/material)). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, CeraDiode, CSSP, PhaseCap, PhaseMod, SIFI, SIKOREL, Silver-Cap, SIMID, SIOV, SIP5D, SIP5K, TOPcap, UltraCap, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at [www.epcos.com/trademarks](http://www.epcos.com/trademarks).