

TRIAD™ 01


130-722 TO 131-090

TRIAD 01 is a subminiature circular connector system which can be used for applications where shielding is a requirement. Beside the excellent shielding properties of TRIAD01 there is also a good resistance against UV beams because of the OPTALOY® plating for all metal shell parts. TRIAD01 is a liquid- and dust-tight system according to IP65 protection-class (DIN 40050).

4

A 3xO-ring design of the TRIAD01 panel-mount-connectors is ideal for using the TRIAD01 system in smoke-analysis applications. Special T-adaptors with either a TRIAD01 connector or a SUB-D connector as Interface-Plug are offering the usage of TRIAD01 for BUS wiring like for a CAN- or for a MOD-BUS. Both systems consist of 3 items:

- 1 The T-Adaptor
- 2 The "Trunk"-Cable – an overmoulded cable with 2 male connectors
- 3 Terminator-Plug

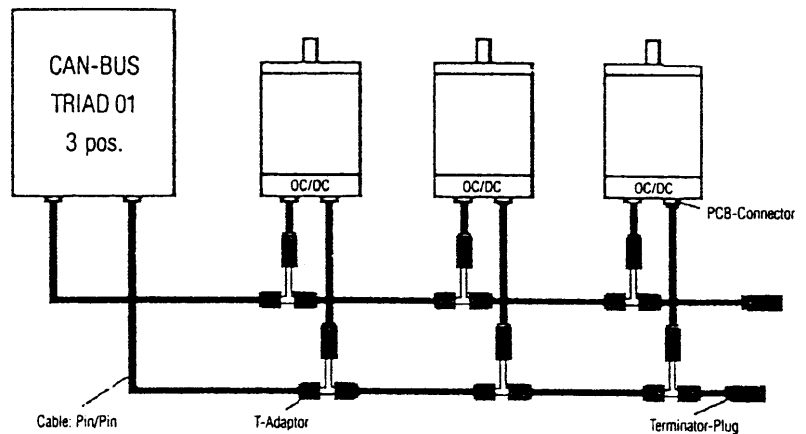


TRIAD™ 01

Shielded Subminiature


Circular Connectors

Panel Mount Version

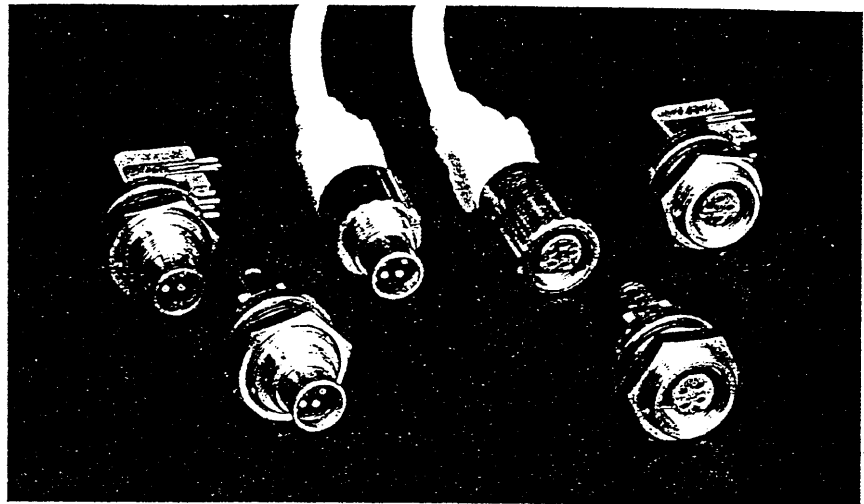


PCB layout for max. 1.6 mm thickness
(only for PCB pinversions)






180°

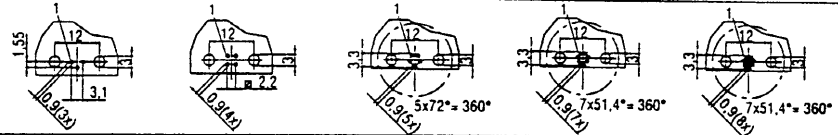





90°

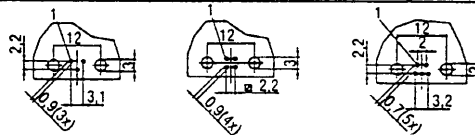

Arrangement of Contacts/Mating side
pinversion.



Arrangement of Contacts/
Termination side pinversion.
(For sockets, arrangement is mirror
image of pin version)



No. of Contacts

3

4

5

7

8

Catalogue No.

Panel Mount 180° PCB version, pin	T01-0570-P03	T01-0570-P04	T01-0570-P05	T01-0570-P07	T01-0570-P08
Panel Mount 180° PCB version, socket	T01-0570-S03	T01-0570-S04	T01-0570-S05	T01-0570-S07	T01-0570-S08
Panel Mount 90° PCB version, pin	T01-0560-P03	T01-0560-P04	T01-0560-P05	—	—
Panel Mount 90° PCB version, socket	T01-0560-S03	T01-0560-S04	T01-0560-S05	—	—
Panel Mount 180° Handsolder version, pin	T01-0580-P03	T01-0580-P04	T01-0580-P05	T01-0580-P07	T01-0580-P08
Panel Mount 180° Handsolder version, pocket	T01-0580-S03	T01-0580-S04	T01-0580-S05	T01-0580-S07	T01-0580-S08

Technical Data

Termination	Soldering				
Plating	Tribor 4 µm				
Dielectric of insert	PBT UL 94-V2				
Shell protection class	IP 65 acc. DIN 40050				
Shell material	CuZn				
Operating temperature range	-40 °C to +85 °C				
Mating cycles	> 500				
Wire gage	max. 0.25 mm²		max. 0.14 mm²		
Rated current per contact	3 A		1 A		
Test voltage	500 V AC		500 V AC		
Operating voltage	60 V AC		60 V AC		
Contact resistance	< 3 m Ω		< 5 m Ω		

Priority type available from stock









Minimum unit quantity: 25 pieces (500 pcs)

TRIAD™ 01

Shielded Subminiature

Circular Connectors

Panel Mount Version

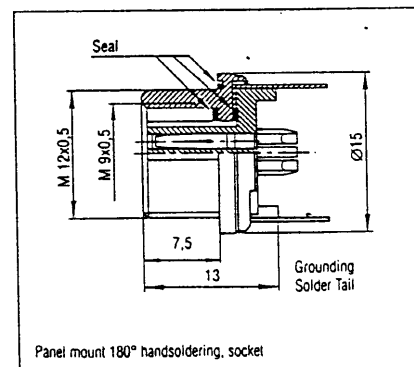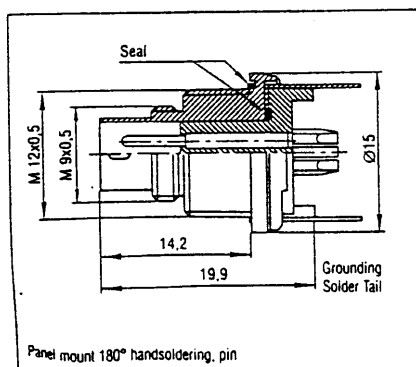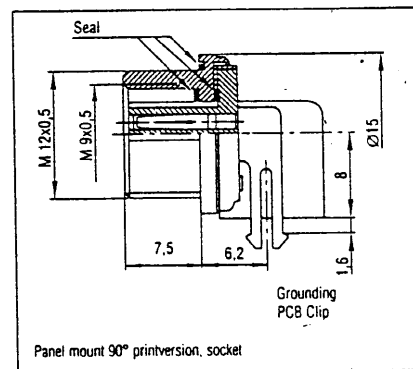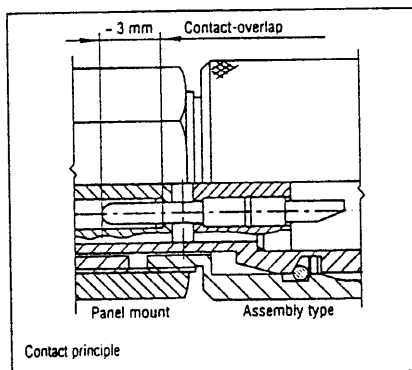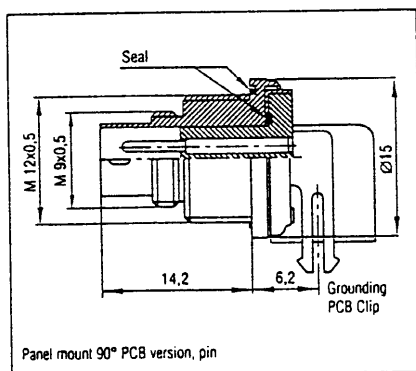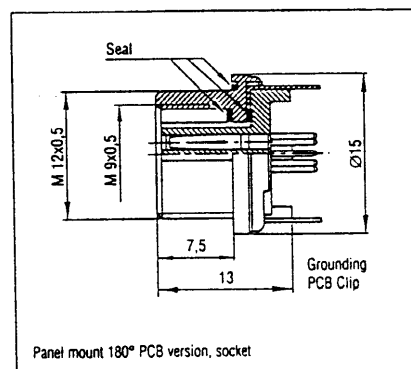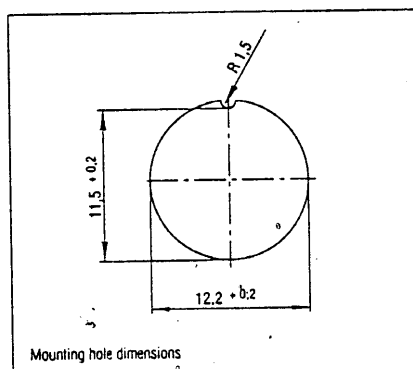
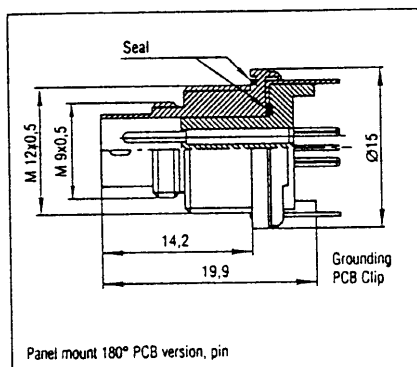


TRIAD™ 01


Shielded Subminiature

Circular Connectors

Cable Mount Plugs

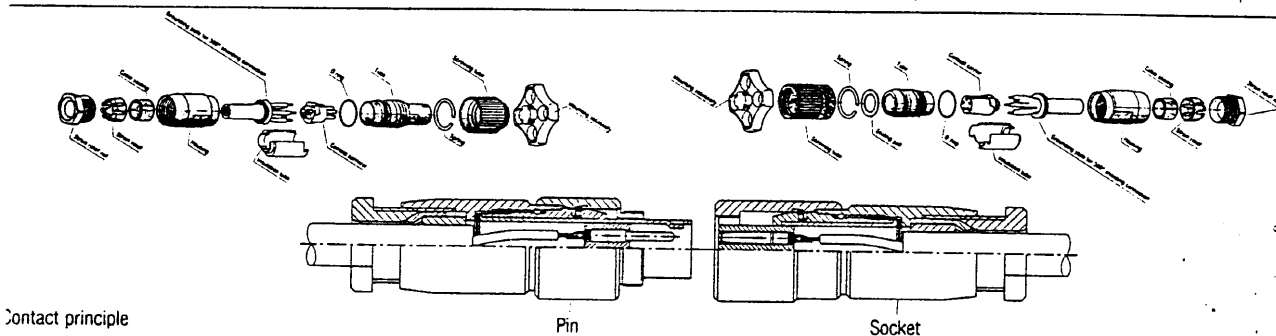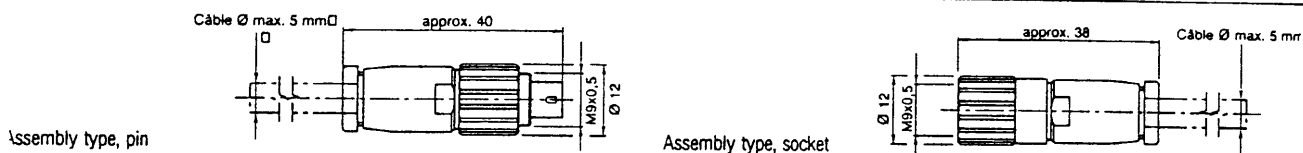

Arrangement of Contacts

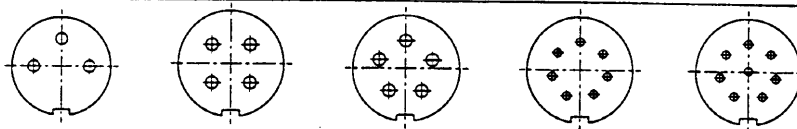

No. of Contacts

3

4

5

7

8

Catalogue No.

Assembly type, pin

T01-0550-P03

T01-0550-P04

T01-0550-P05

T01-0550-P07

T01-0550-P08

Assembly type, socket

T01-0550-S03

T01-0550-S04

T01-0550-S05

T01-0550-S07

T01-0550-S08

Technical Data

3

4

5

7

8

Termination

Soldering

Plating

Tribor 4 µm

Dielectric of insert

PBT UL 94-V2

Shell protection class

IP65 acc. DIN 40050

Shell material

CuZn

Operating temperature range

-40 °C to +85 °C

Mating cycles

> 500

Wire gage

max. 0.25 mm²

max. 0.14 mm²

Rated current per contact

3 A

1 A

Test voltage

500 VAC

500 VAC

Operating voltage

60 VAC

60 VAC

Contact resistance

< 3 mΩ

< 5 mΩ

Priority type available from stock

Minimum unit quantity: 25 pieces

14



TRIAD™ 01

Shielded Subminiature

Circular Connectors


Cable assemblies

with overmoulded Connectors

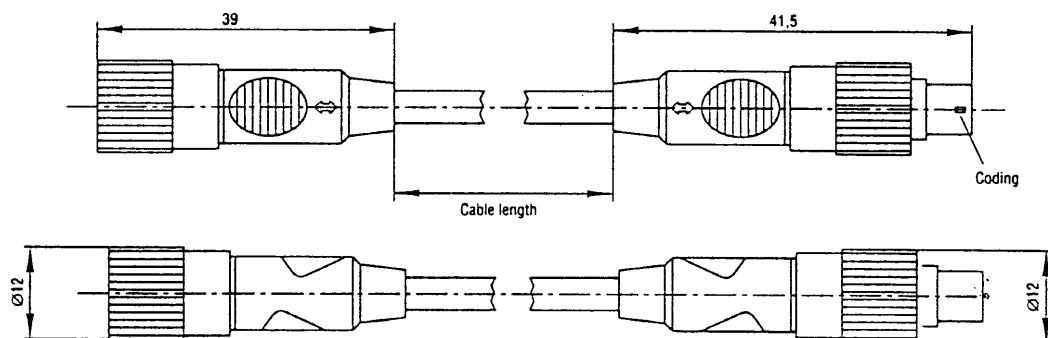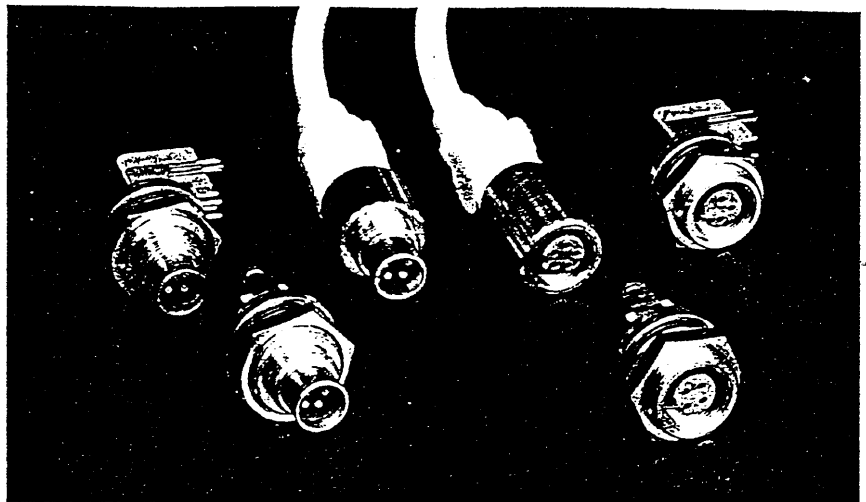

Cable with overmoulded connector

Arrangement of Contacts



No. of Contacts	3	4	5	7	8
Catalogue No.					
Cable length 1 m	T01-0599-B03-A	T01-0599-B04-A	T01-0599-B05-A	T01-0599-B07-A	T01-0599-B08-A
Cable length 3 m	T01-0599-B03-B	T01-0599-B04-B	T01-0599-B05-B	T01-0599-B07-B	T01-0599-B08-B
Cable length 5 m	T01-0599-B03-C	T01-0599-B04-C	T01-0599-B05-C	T01-0599-B07-C	T01-0599-B08-C
Technical Data					
Termination	Soldering				
Plating	Tribor 4 µm				
Dielectric of insert	PBT UL 94-V2				
Shell protection class	IIP65 acc. DIN 40050				
Shell material	CuZn				
Operating temperature range	-40 °C to +85 °C				
Mating cycles	> 500				
Wire gage	max. 0.25 mm²		max. 0.14 mm²		
Rated current per contact	3 A		1 A		
Test voltage	500 VAC		500 VAC		
Operating voltage	60 VAC		60 VAC		
Contact resistance	< 3 mΩ		< 5 mΩ		

Priority type available from stock

Minimum unit quantity: 10 pieces

972-046
972-058

TRIAD™ 01

Shielded Subminiature




Circular Connectors

Accessories and Specials

CAN-BUS Components:


Non-interrupted Power

Supply for Network Devices

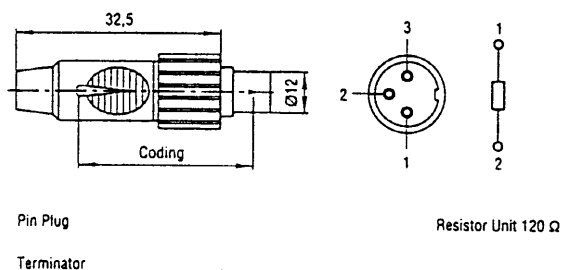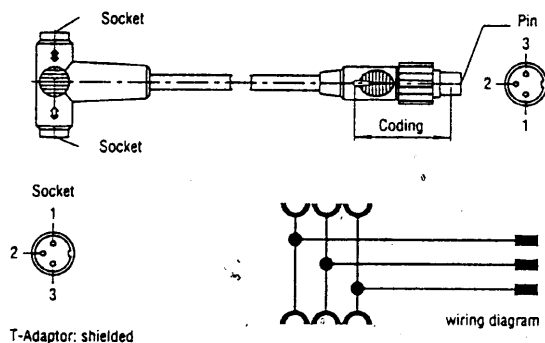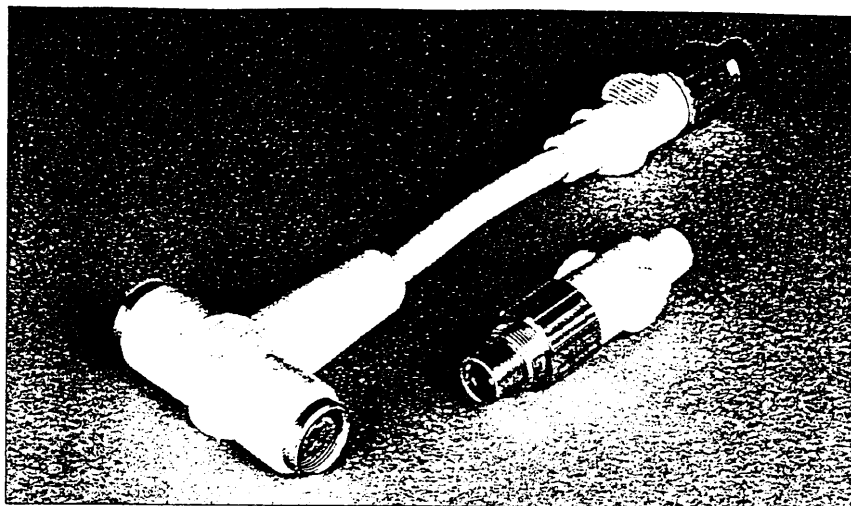

Cable assemblies, with overmoulded connectors: shielded

Arrangement of Contacts

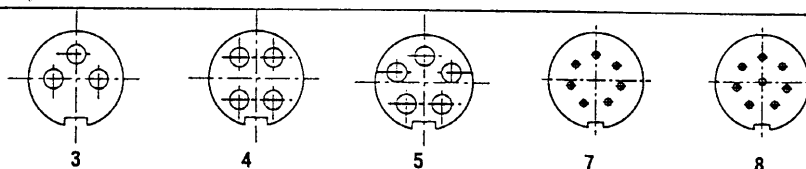

No. of Contacts

Catalogue No.

T-Adaptor	T01-05T-SSP03-T	T01-05T-SSP04-T	T01-05T-SSP05-T	T01-05T-SSP07-T	T01-05T-SSP08-T
Terminator Resistor Unit	T01-05R-P03-120	-	-	-	-
Technical Data	3	4	5	7	8
Termination	Soldering				
Plating	Tribor 4 µm				
Dielectric of insert	PBT UL 94-V2				
Shell protection class	IP65 acc. DIN 40050				
Shell material	CuZn				
perating temperature range	-40 °C to +85 °C				
Mating cycles	> 500				
Wire gage	max. 0.25 mm²				
Rated current per contact	3 A				
Test voltage	500 VAC				
Operating voltage	60 VAC				
Contact resistance	< 3 mΩ				

Priority type available from stock

Minimum unit quantity: 25 pieces




TRIAD™ 01

Shielded Subminiature

Circular Connectors

Accessories and Specials


MOD-BUS Components

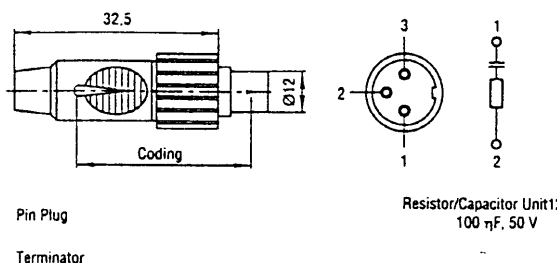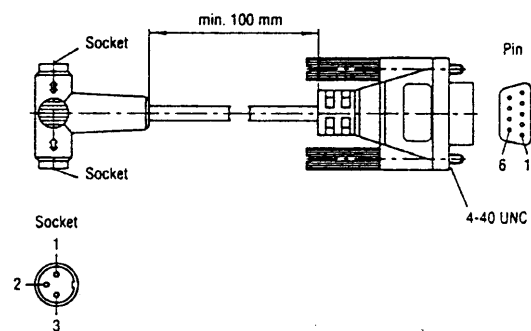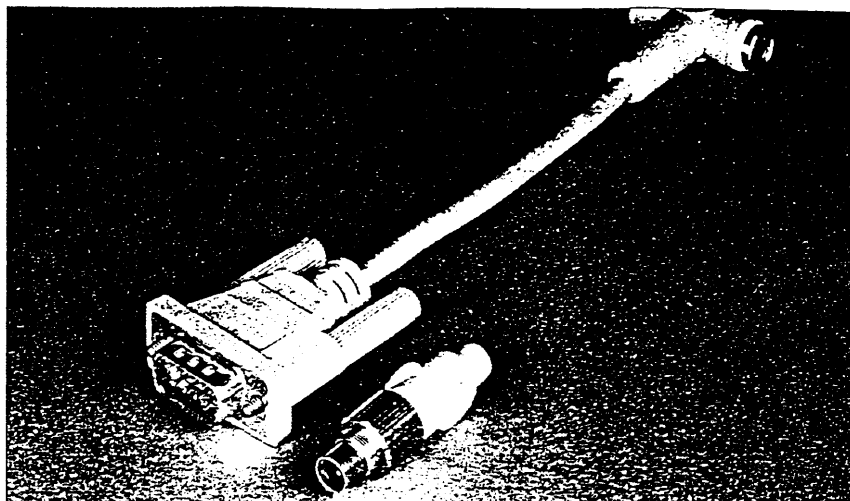

MOD-BUS-Adaptor: shielded

Cable assemblies, with overmoulded connectors: shielded

Arrangement of Contacts



No. of Contacts

3

Catalogue No.


MOD-BUS Adaptor

T01-05T-MOD03-T

Terminator Resistor/Capacitor Unit

T01-05R-P03-RC

Assignment of Contacts: MOD-BUS Adaptor



Technical Data

3

Termination

Soldering

Plating

Tribor 4 µm

Dielectric of insert

PBT UL 94-V2

Shell protection class

IP65 acc. DIN 40050

Shell material

CuZn

Operating temperature range

-40 °C to +85 °C

Mating cycles

> 500

Wire gage

max. 0.25 mm²

Rated current per contact

3 A

Test voltage

500 VAC

Operating voltage

60 VAC

Contact resistance

< 3 mΩ

TRIAD™ 01



Shielded Subminiature

Circular Connectors

Accessories and Specials




BUS-Cable Assemblies

with Overmoulded Connectors

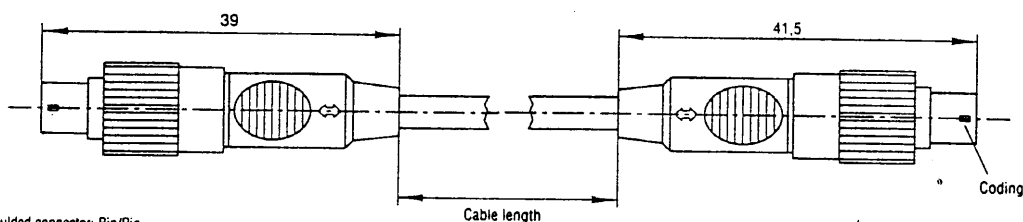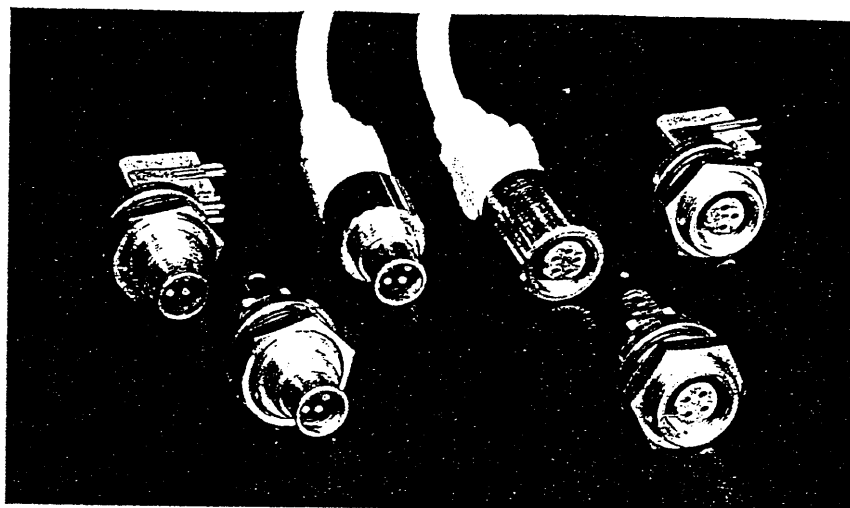

Cable with overmoulded connector: Pin/Pin

Arrangement of Contacts



No. of Contacts	3	4	5
	Catalogue No.		
Cable length 0.5 m	T01-0599-PP03-F	T01-0599-PP04-F	T01-0599-PP05-F
Cable length 1 m	T01-0599-PP03-A	T01-0599-PP04-A	T01-0599-PP05-A
Cable length 2 m	T01-0599-PP03-E	T01-0599-PP04-E	T01-0599-PP05-E
Cable length 5 m	T01-0599-PP03-C	T01-0599-PP04-C	T01-0599-PP05-C
Technical Data	3	4	5
Termination		Soldering	
Plating		Tribor 4 µm	
Dielectric of insert		PBT UL 94-V2	
Shell protection class		IIP65 acc. DIN 40050	
Shell material		CuZn	
Operating temperature range		-40 °C to +85 °C	
Mating cycles		> 500	
Wire gage		max. 0.25 mm²	
Rated current per contact		3 A	
Test voltage		500 VAC	
Operating voltage		60 VAC	
Contact resistance		< 3 mΩ	

Priority type available from stock

Minimum unit quantity: 25 pieces


TRIAD™ 01

Shielded Subminiature


Circular Connectors

Accessories and Specials

Dust Caps

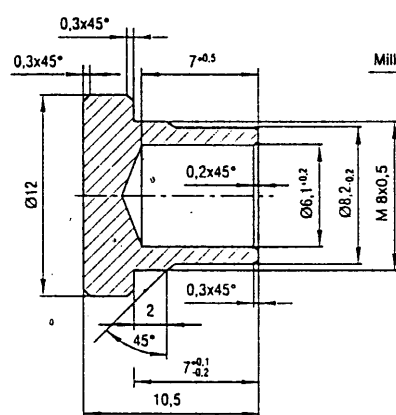

Dust cap: for socket connectors

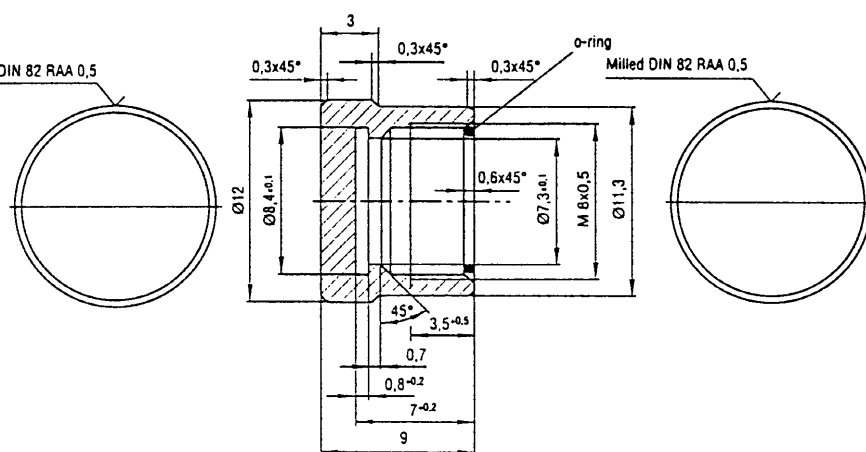

Dust cap: for pin connectors

No. of Contacts	3	4	5	7	8
For Pin Plugs	Catalogue No. T01-0500-P				
For Socket Connectors	T01-0500-S				
Technical Data	3	4	5	7	8
Shell protection class	IP 65 acc. DIN 40050				
Shell material	CuZn				
Operating temperature range	-40 °C to +85 °C				

Priority type available from stock

Minimum unit quantity: 25 pieces