




A 9060

Features:


- epoxy-encapsulated housing
- small dimensions

Application:

- indicator control in pocket cameras
- light intensity control of radio clocks
- exposure meters
- contrast control of TV sets

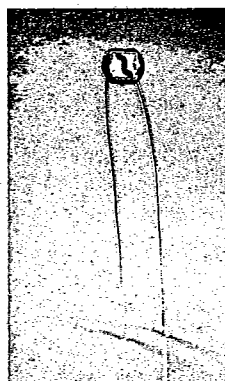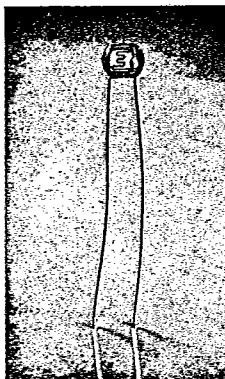


alternativ



TYP	R ₁₀ [kΩ]	R ₁₀₀ [kΩ]	R ₀₁ [kΩ]	R ₀₅ [kΩ]	V _{max} [V]	P _{max} [mW]	t _{an} [ms]	t _{ab} [ms]	TK [%K]
A 9060 11	14	3,6	60	180	150	90	60	35	0,3
9060 12	24	4,9	180	540	150	90	50	30	0,35
9060 13	57	7,8	500	1.500	150	90	35	28	0,4
9060 14	215	15	11.000	33.000	150	90	20	25	0,5
9060 31	96	26,5	400	1.200	300	90	60	35	0,3
9060 32	165	35	1.200	3.600	300	90	50	30	0,35
9060 33	400	55	3.600	10.800	300	90	35	28	0,4
9060 34	1.500	110	65.000	100.000	300	90	20	25	0,5

A 9060...

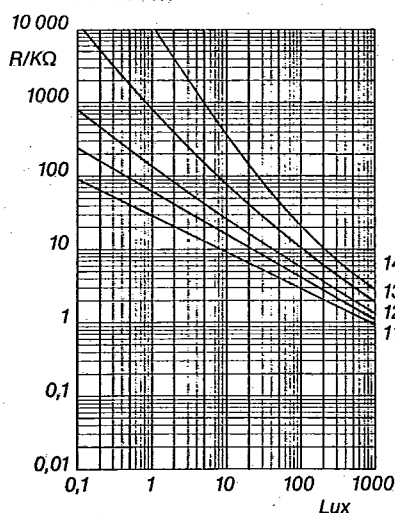

A 9060...

