


386SX-40 Processor

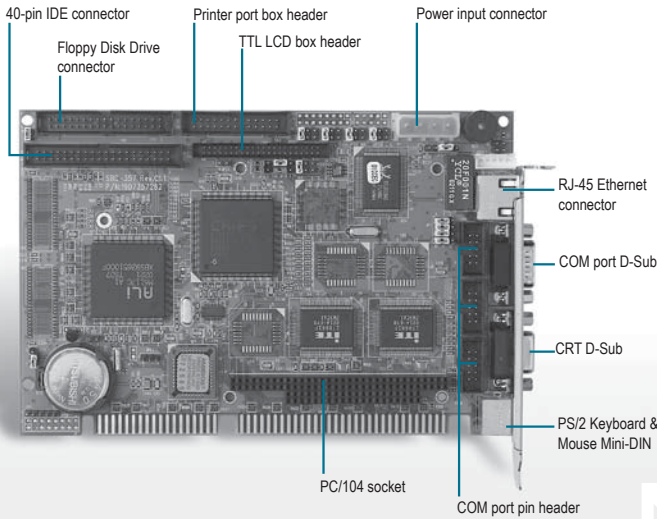

Features

- Onboard ALI M6117C Single Chip Processor
- 18-bit TTL TFT/DSTN/MONO LCD
- Supports PC/104 Slot
- 4 COM
- +5V Only Operation
- Onboard 1.5MB Flash Disk (Optional)
- Onboard 128K S-RAM Disk (Optional)

Specifications

System	
Processor	Onboard ALI M6117C
Main Chipset	ALI M6117C
I/O Chipset	ITE 8661F
System Memory	Onboard 4MB or 8MB EDO Memory
Ethernet	Realtek 8019AS, 10Base-T RJ-45 connector x 1
BIOS	AMI 128KB FLASH ROM
Watchdog Timer	Generates a time-out system reset
SSD	Onboard 1.5MB Flash Disk (Optional)
Expansion Interface	ISA interface, PC/104 socket x 1
Battery	Lithium battery
Power Requirement	+5V/ AT
Board Size	7.3"(L) x 4.8"(W) (185mm x 122mm)
Gross Weight	0.7 lb (0.3kg)
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)
Display	
Supports CRT and LCD simultaneous display	
Chipset	C&T 65545
Memory	1MB
Resolutions	Up to 800x600@8bpp colors for CRT Up to 640x480@18bpp colors for LCD
LCD Interface	Up to 18-bit TTL TFT LCD
I/O	
MIO	EIDE x 1(PIO-Mode4 x 1), Floppy Disk Drive x 1, Keyboard + Mouse x 1, RS-232 x 3, RS-232/422/485 x 1, Parallel x 1



Packing List

- **9657456000**
Cable Kit (Serial Port Cable, Keyboard and Mouse Cable)
- **Quick Installation Guide**
- **Utility CD**
- **SBC-357C**

Ordering Information

- **SBC-357-C11**
Half-size CPU Card, 386SX, Onboard 4MB EDO RAM, 1.5MB Flash Disk, SVGA, SRAM, LAN, 4 COM, Rev.C1.1
- **SBC-357-C11-01**
Half-size CPU Card, 386SX, Onboard 4MB EDO RAM, SVGA, LAN, 4 COM, Rev.C1.1
- **SBC-357-C11-02**
Half-size CPU Card, 386SX, Onboard 8MB EDO RAM, 1.5MB Flash Disk, SVGA, SRAM, LAN, 4 COM, Rev.C1.1
- **SBC-357-C11-03**
Half-size CPU Card, 386SX, Onboard 8MB EDO RAM, SVGA, LAN, 4 COM, Rev.C1.1