

New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.
 SPRINGFIELD, NEW JERSEY 07081
 U.S.A.

TELEPHONE: (973) 376-2822
 (212) 227-8005
 FAX: (973) 376-8860

PARAMETERS


1N1371R, RA
 REF/REG DIODE, $5W < P(D) \leq 10W$

Description: Ref/Reg Diode, $5W < P(D) \leq 10W$

Manufacturer..... CRL
 Mil/High-Rel? (Y/N).....
 Nom. Ref. Volt..... 68
 Test Current..... 50m
 Tol. (%)..... 5∞
 PD Max. (W)..... 10
 Dyn. Zmax (Ω)..... 14
 Temp Coef pp/10k.....
 Oper. Temp (°C) Max..... 175
 Pkg Style..... DO-4
 Surface Mounted (Y/N)..... N


J Junction Temperature It(rms) ∞ Many Values Available

D0-4

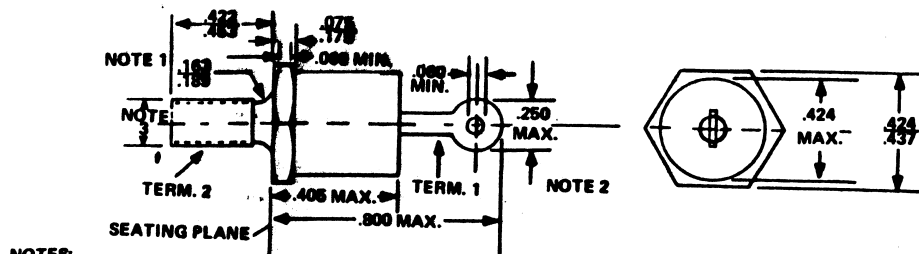

NOTES:

1. COMPLETE THREADS TO EXTEND TO WITHIN 2-1/2 THREADS OF SEATING PLANE.
2. ANGULAR ORIENTATION OF THIS TERMINAL IS UNDEFINED.
3. 10-32 UNF-2A MAXIMUM PITCH DIAMETER OF PLATED THREADS SHALL BE BASIC PITCH DIAMETER (.429", 4.29 MM) REF. (SCREW THREAD STANDARDS FOR FEDERAL SERVICES 1967) HANDBOOK H28 PP.



NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.