## **CAMBION**<sup>a</sup>


## Wearnes Cambion LTD

Castleton, Hope Valley, Derbyshire, S33 8WR, England Telephone: +44(0)1433 621555 Fax: +44(0)1433 621290 Web: www.cambion.com Email: enquiries@cambion.com

**Technical Data Sheet** 

## 571-4254 Insulated solder terminal, Slotted, Feed thru

Recommended mounting hole .158 (4,01)

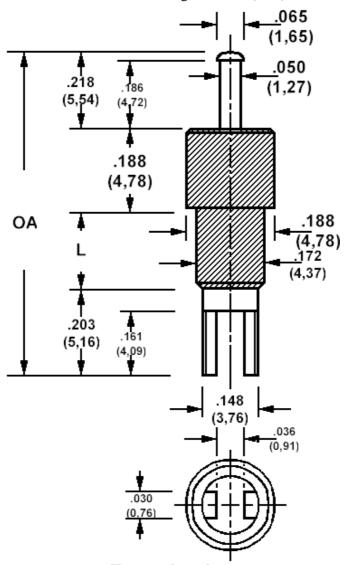

 $\frac{571\text{-}4254\text{-}01}{571\text{-}4254\text{-}01} = \frac{571\text{-}4254\text{-}01}{12}$  Basic Part No (XX = panel thickness, YY = plating finish. See tables for options)

Basic Part No.		OA (ref)	L	Panel Thickness (XX)
571-4254	-01	.821 (20,85)	.212 (5,38)	.031 (0,79) to .172 (4,37)

Component	Material	Finish (YY)	
		-01	-05
Terminal	Brass	Silver	Electro Solder
Insulator	Teflon - white		

Additional Specifications				
Flashover VRMS at Sea Level	6000			
Capacitance (pF)	0.4			

Teflon is a registered trademark of Dupont