

Frequency Synthesizer

KSN-772A-119+

50Ω 747 to 772 MHz

The Big Deal

- Low phase noise and spurious
- Robust design and construction
- Small size 0.80" x 0.58" x 0.15"



CASE STYLE: DK801

Product Overview

The KSN-772A-119+ is a Frequency Synthesizer, designed to operate from 747 to 772 MHz for digital pre distortion project application. The KSN-772A-119+ is packaged in a metal case (size of 0.80" x 0.58" x 0.15") to shield against unwanted signals and noise.

Key Features

| Feature | Advantages |
|---|--|
| Low phase noise and spurious: <ul style="list-style-type: none">• Phase noise: -106 dBc/Hz typ. @ 10 kHz offset• Comparison spurious: -90 dBc typ.• Reference spurious: -100 dBc typ. | Low phase noise and spurious improve system EVM (Error Vector Magnitude). |
| Robust design and construction | To enhance the robustness of KSN-772A-119+, each internal component is secured to the substrate with chip bonders, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer. |
| Small size, 0.80" x 0.58" x 0.15" | The small size enables the KSN-772A-119+ to be used in compact designs. |



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

50Ω 747 to 772 MHz

Features

- Integrated VCO + PLL
- Low phase noise and spurious
- Robust design and construction
- Low operating voltage (VCC VCO=+5V, VCC PLL=+5V)
- Small size 0.80" x 0.58" x 0.15"



CASE STYLE: DK801
PRICE: \$29.95 ea. QTY (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


Applications

- Digital pre distortion project

General Description

The KSN-772A-119+ is a Frequency Synthesizer, designed to operate from 747 to 772 MHz for digital pre distortion project application. The KSN-772A-119+ is packaged in a metal case (size of 0.80" x 0.58" x 0.15") to shield against unwanted signals and noise. To enhance the robustness of KSN-772A-119+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer.

Simplified Schematic

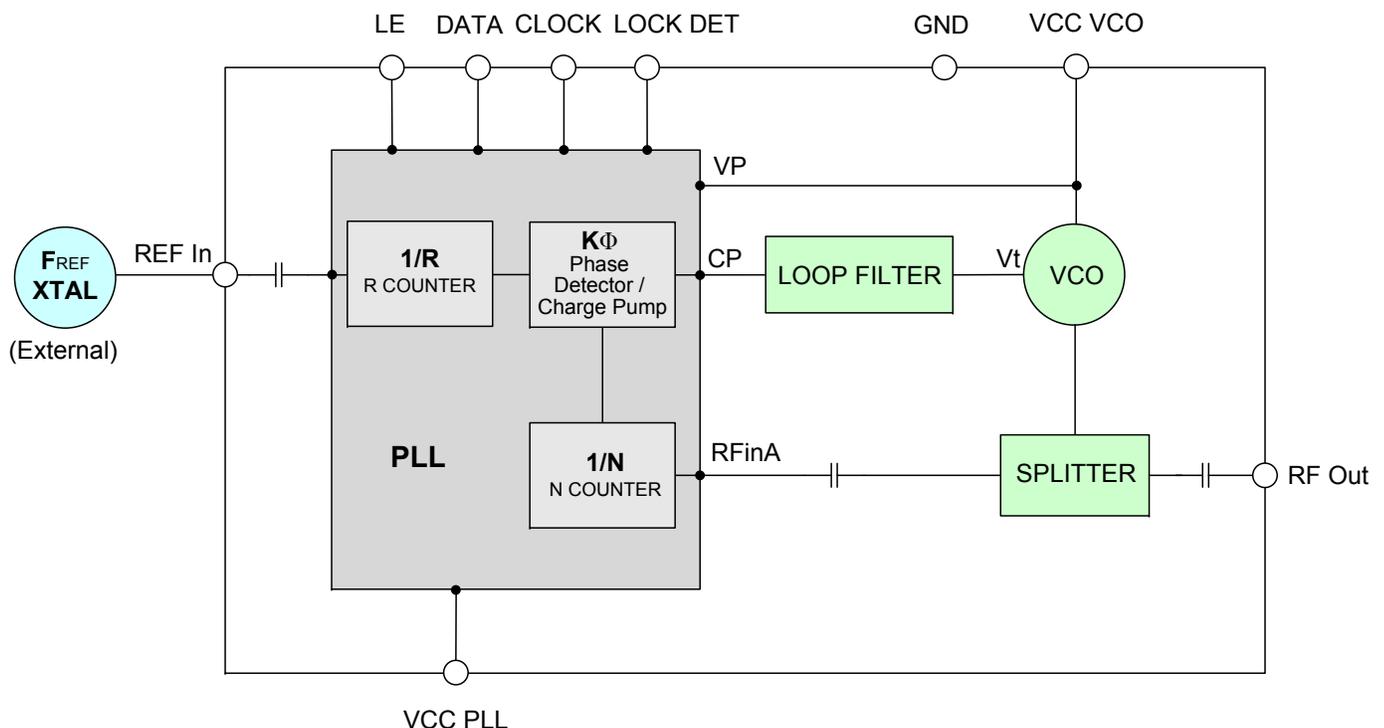

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR
M126018
EDR-7624/1F1
KSN-772A-119+
Category-A1
RAV
100316
Page 2 of 11

Electrical Specifications (over operating temperature -40°C to +85°C)

| Parameters | Test Conditions | Min. | Typ. | Max. | Units |
|-------------------------------------|----------------------------|-------------------------|-----------------------------------|-------|------------------|
| Frequency Range | - | 747 | - | 772 | MHz |
| Step size | - | - | 100 | - | kHz |
| Settling Time | Within ± 1 kHz | - | 5 | - | mSec |
| Output Power | - | +1.0 | +3.5 | +6.0 | dBm |
| SSB Phase Noise | @ 100 Hz offset | - | -84 | - | dBc/Hz |
| | @ 1 kHz offset | - | -80 | -73 | |
| | @ 10 kHz offset | - | -106 | -102 | |
| | @ 100 kHz offset | - | -138 | -132 | |
| | @ 1 MHz offset | - | -158 | -152 | |
| Reference Spurious Suppression | Ref. Freq. 61 MHz | - | -100 | -85 | dBc |
| Comparison Spurious Suppression | Step Size 100 kHz | - | -90 | -75 | |
| Non - Harmonic Spurious Suppression | - | - | -90 | - | |
| Harmonic Suppression | - | - | -30 | -25 | dBc |
| VCO Supply Voltage | +5.00 | +4.75 | +5.00 | +5.25 | V |
| PLL Supply Voltage | +5.00 | +4.75 | +5.00 | +5.25 | |
| VCO Supply Current | - | - | 25 | 33 | mA |
| PLL Supply Current | - | - | 14 | 20 | |
| Reference Input (External) | Frequency | 61 (sine wave) | - | 61 | MHz |
| | Amplitude | 1.0 | - | 1.0 | V _{P-P} |
| | Input impedance | - | - | 100 | KΩ |
| | Phase Noise @ 1 kHz offset | - | - | -130 | dBc/Hz |
| RF Output port Impedance | - | - | 50 | - | Ω |
| Input Logic Level | Input high voltage | - | 2.60 | - | V |
| | Input low voltage | - | - | 0.40 | V |
| Digital Lock Detect | Locked | - | 2.55 | 3.30 | V |
| | Unlocked | - | - | 0.40 | V |
| Frequency Synthesizer PLL | - | ADF4118 | | | |
| PLL Programming | - | 3-wire serial 3.3V CMOS | | | |
| Register Map @ 772 MHz | F_Register | - | (MSB) X0XXX00000X0010010010 (LSB) | | |
| | N_Register | - | (MSB) 100000111100010100001 (LSB) | | |
| | R_Register | - | (MSB) 1XXXX0000100110001000 (LSB) | | |

Absolute Maximum Ratings

| Parameters | Ratings |
|--|---------------------|
| VCO Supply Voltage | 6V |
| PLL Supply Voltage | 6V |
| VCO Supply Voltage to PLL Supply Voltage | -0.3V to +5.5V |
| Reference Frequency Voltage | -0.3Vmin, +3.25Vmax |
| Data, Clock, LE Levels | -0.3Vmin, +3.25Vmax |
| Operating Temperature | -40°C to +85°C |
| Storage Temperature | -55°C to +100°C |

Permanent damage may occur if any of these limits are exceeded



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
 P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Notes: 1. Performance and quality attributes not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Typical Performance Data

| FREQUENCY (MHz) | POWER OUTPUT (dBm) | | | VCO CURRENT (mA) | | | PLL CURENT (mA) | | |
|--------------------|-----------------------|-------|-------|---------------------|-------|-------|--------------------|-------|-------|
| | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C |
| | 747 | 3.44 | 3.48 | 3.43 | 22.99 | 24.18 | 25.12 | 12.79 | 13.79 |
| 749 | 3.42 | 3.46 | 3.41 | 23.01 | 24.18 | 25.12 | 12.81 | 13.79 | 14.74 |
| 751 | 3.41 | 3.44 | 3.39 | 23.01 | 24.18 | 25.12 | 12.80 | 13.80 | 14.73 |
| 753 | 3.40 | 3.43 | 3.38 | 23.01 | 24.19 | 25.13 | 12.80 | 13.80 | 14.75 |
| 755 | 3.38 | 3.41 | 3.36 | 23.01 | 24.19 | 25.13 | 12.79 | 13.80 | 14.77 |
| 757 | 3.37 | 3.40 | 3.35 | 23.01 | 24.20 | 25.13 | 12.78 | 13.80 | 14.79 |
| 759 | 3.36 | 3.39 | 3.34 | 23.01 | 24.20 | 25.13 | 12.79 | 13.79 | 14.78 |
| 761 | 3.34 | 3.37 | 3.32 | 23.01 | 24.20 | 25.13 | 12.80 | 13.79 | 14.71 |
| 763 | 3.33 | 3.36 | 3.31 | 23.02 | 24.20 | 25.13 | 12.80 | 13.78 | 14.55 |
| 765 | 3.31 | 3.35 | 3.29 | 23.02 | 24.21 | 25.13 | 12.81 | 13.78 | 14.75 |
| 767 | 3.31 | 3.33 | 3.27 | 23.02 | 24.21 | 25.15 | 12.79 | 13.80 | 14.76 |
| 769 | 3.31 | 3.32 | 3.24 | 23.01 | 24.22 | 25.17 | 12.75 | 13.83 | 14.76 |
| 772 | 3.33 | 3.29 | 3.19 | 23.03 | 24.23 | 25.15 | 12.79 | 13.80 | 14.76 |

| FREQUENCY (MHz) | HARMONICS (dBc) | | | | | |
|--------------------|-----------------|--------|--------|--------|--------|--------|
| | F2 | | | F3 | | |
| | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C |
| 747 | -32.54 | -31.36 | -30.75 | -51.20 | -51.37 | -53.05 |
| 749 | -32.50 | -31.30 | -30.68 | -53.32 | -50.77 | -52.39 |
| 751 | -32.47 | -31.30 | -30.66 | -53.76 | -50.95 | -52.40 |
| 753 | -32.44 | -31.32 | -30.65 | -53.34 | -51.46 | -52.68 |
| 755 | -32.42 | -31.31 | -30.63 | -52.68 | -51.98 | -52.93 |
| 757 | -32.40 | -31.26 | -30.59 | -52.19 | -52.32 | -53.02 |
| 759 | -32.38 | -31.18 | -30.53 | -52.06 | -52.39 | -52.93 |
| 761 | -32.36 | -31.09 | -30.46 | -52.31 | -52.24 | -52.78 |
| 763 | -32.32 | -31.02 | -30.40 | -52.73 | -52.06 | -52.84 |
| 765 | -32.27 | -31.03 | -30.40 | -52.90 | -52.15 | -53.49 |
| 767 | -32.20 | -31.19 | -30.48 | -52.22 | -52.91 | -52.90 |
| 769 | -32.24 | -31.09 | -30.43 | -52.80 | -52.46 | -54.25 |
| 772 | -32.38 | -31.19 | -30.56 | -52.82 | -52.74 | -53.55 |



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
 P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

| FREQUENCY (MHz) | PHASE NOISE (dBc/Hz) @OFFSETS | | | | |
|--------------------|-------------------------------|--------|---------|---------|---------|
| | +25°C | | | | |
| | 100Hz | 1kHz | 10kHz | 100kHz | 1MHz |
| 747 | -82.91 | -78.93 | -106.52 | -138.86 | -158.94 |
| 749 | -83.33 | -79.55 | -106.44 | -138.64 | -159.14 |
| 751 | -83.55 | -80.07 | -106.29 | -138.46 | -159.19 |
| 753 | -83.17 | -80.29 | -105.95 | -138.37 | -158.77 |
| 755 | -82.78 | -80.52 | -105.61 | -138.29 | -158.36 |
| 757 | -83.15 | -80.97 | -106.13 | -138.32 | -158.37 |
| 759 | -83.53 | -81.42 | -106.66 | -138.34 | -158.39 |
| 761 | -84.27 | -80.90 | -107.10 | -138.41 | -158.31 |
| 763 | -85.13 | -80.05 | -107.51 | -138.50 | -158.20 |
| 765 | -85.23 | -79.73 | -107.70 | -138.47 | -158.05 |
| 767 | -84.56 | -79.93 | -107.67 | -138.33 | -157.85 |
| 769 | -83.98 | -79.93 | -107.81 | -138.23 | -157.63 |
| 772 | -83.50 | -79.03 | -108.78 | -138.26 | -157.24 |

| FREQUENCY (MHz) | PHASE NOISE (dBc/Hz) @OFFSETS | | | | |
|--------------------|-------------------------------|--------|---------|---------|---------|
| | -45°C | | | | |
| | 100Hz | 1kHz | 10kHz | 100kHz | 1MHz |
| 747 | -85.35 | -79.00 | -105.82 | -139.27 | -160.01 |
| 749 | -84.89 | -80.28 | -105.73 | -139.18 | -159.90 |
| 751 | -84.73 | -81.38 | -105.61 | -139.08 | -159.56 |
| 753 | -85.51 | -81.95 | -105.35 | -138.90 | -158.54 |
| 755 | -86.28 | -82.51 | -105.09 | -138.73 | -157.53 |
| 757 | -85.24 | -81.97 | -105.22 | -138.57 | -157.86 |
| 759 | -84.20 | -81.43 | -105.36 | -138.41 | -158.20 |
| 761 | -82.81 | -81.42 | -105.73 | -138.26 | -158.19 |
| 763 | -81.30 | -81.59 | -106.18 | -138.11 | -158.08 |
| 765 | -81.01 | -81.09 | -106.61 | -137.98 | -157.92 |
| 767 | -81.94 | -79.93 | -107.02 | -137.86 | -157.73 |
| 769 | -82.47 | -79.34 | -107.38 | -137.69 | -157.48 |
| 772 | -81.53 | -81.04 | -107.77 | -137.23 | -156.86 |

| FREQUENCY (MHz) | PHASE NOISE (dBc/Hz) @OFFSETS | | | | |
|--------------------|-------------------------------|--------|---------|---------|---------|
| | +85°C | | | | |
| | 100Hz | 1kHz | 10kHz | 100kHz | 1MHz |
| 747 | -83.72 | -79.26 | -105.70 | -137.85 | -158.63 |
| 749 | -83.77 | -80.64 | -105.55 | -137.78 | -158.44 |
| 751 | -83.78 | -81.52 | -105.42 | -137.70 | -158.23 |
| 753 | -83.70 | -80.89 | -105.36 | -137.58 | -157.94 |
| 755 | -83.62 | -80.25 | -105.30 | -137.46 | -157.66 |
| 757 | -83.20 | -81.22 | -105.35 | -137.57 | -157.39 |
| 759 | -82.78 | -82.19 | -105.41 | -137.67 | -157.13 |
| 761 | -82.94 | -81.39 | -105.90 | -137.78 | -157.41 |
| 763 | -83.29 | -80.00 | -106.53 | -137.88 | -157.87 |
| 765 | -83.95 | -79.22 | -107.05 | -137.99 | -158.15 |
| 767 | -84.93 | -79.05 | -107.44 | -138.12 | -158.24 |
| 769 | -85.50 | -78.88 | -107.80 | -138.23 | -158.17 |
| 772 | -84.49 | -78.55 | -108.20 | -138.27 | -157.32 |



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

| COMPARISON SPURIOUS ORDER | COMPARISON SPURIOUS @Fcarrier 747MHz+(n*Freference) (dBc) note 1 | | | COMPARISON SPURIOUS @Fcarrier 760MHz+(n*Fcomparison) (dBc) note 1 | | | COMPARISON SPURIOUS @Fcarrier 772MHz+(n*Fcomparison) (dBc) note 1 | | |
|---------------------------|--|---------|---------|---|---------|---------|---|---------|---------|
| | n | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C | -45°C | +25°C |
| -5 | -110.82 | -113.07 | -112.02 | -107.73 | -109.82 | -112.85 | -106.44 | -109.60 | -110.03 |
| -4 | -108.88 | -113.00 | -109.76 | -105.64 | -106.89 | -107.96 | -104.76 | -103.96 | -106.38 |
| -3 | -105.81 | -111.56 | -107.21 | -101.47 | -105.24 | -104.94 | -98.99 | -101.69 | -101.10 |
| -2 | -102.49 | -106.92 | -100.14 | -92.51 | -96.28 | -96.42 | -89.16 | -93.67 | -92.75 |
| -1 | -99.98 | -108.67 | -96.06 | -98.92 | -94.98 | -93.06 | -94.27 | -93.23 | -89.85 |
| 0 note 2 | - | - | - | - | - | - | - | - | - |
| +1 | -101.32 | -106.17 | -96.33 | -99.30 | -95.94 | -93.83 | -94.09 | -93.99 | -90.33 |
| +2 | -103.60 | -109.10 | -101.82 | -93.10 | -97.43 | -97.65 | -89.94 | -94.05 | -93.76 |
| +3 | -108.87 | -113.38 | -109.69 | -103.01 | -104.78 | -105.82 | -99.08 | -103.12 | -101.36 |
| +4 | -112.90 | -112.07 | -111.19 | -110.27 | -108.36 | -109.86 | -105.57 | -107.11 | -105.33 |
| +5 | -112.60 | -114.34 | -111.39 | -109.76 | -109.97 | -110.93 | -107.91 | -108.96 | -109.25 |

Note 1: Comparison frequency 100 kHz
 Note 2: All spurs are referenced to carrier signal (n=0).

| REFERENCE SPURIOUS ORDER | REFERENCE SPURIOUS @Fcarrier 747MHz+(n*Freference) (dBc) note 3 | | | REFERENCE SPURIOUS @Fcarrier 760MHz+(n*Freference) (dBc) note 3 | | | REFERENCE SPURIOUS @Fcarrier 772MHz+(n*Freference) (dBc) note 3 | | |
|--------------------------|---|---------|---------|---|---------|---------|---|---------|---------|
| | n | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C | -45°C | +25°C |
| -5 | -109.41 | -111.56 | -114.07 | -109.87 | -112.74 | -115.81 | -109.42 | -111.52 | -114.85 |
| -4 | -110.24 | -112.03 | -113.36 | -109.60 | -112.04 | -113.14 | -108.81 | -110.22 | -111.89 |
| -3 | -116.16 | -122.81 | -128.77 | -120.54 | -125.38 | -125.25 | -117.86 | -122.46 | -126.32 |
| -2 | -127.50 | -116.96 | -116.93 | -129.36 | -116.64 | -117.33 | -127.50 | -119.67 | -117.05 |
| -1 | -105.63 | -105.17 | -102.54 | -105.70 | -104.47 | -102.32 | -105.22 | -104.41 | -102.01 |
| 0 note 4 | - | - | - | - | - | - | - | - | - |
| +1 | -102.83 | -103.29 | -103.06 | -103.07 | -103.31 | -103.67 | -103.55 | -103.78 | -104.39 |
| +2 | -106.09 | -106.56 | -106.19 | -106.00 | -105.65 | -105.30 | -105.87 | -105.40 | -105.86 |
| +3 | -111.79 | -111.36 | -112.84 | -111.44 | -111.74 | -112.36 | -113.26 | -110.01 | -112.22 |
| +4 | -105.81 | -106.28 | -108.18 | -104.81 | -105.11 | -106.18 | -103.95 | -104.84 | -106.83 |
| +5 | -109.40 | -111.51 | -114.50 | -110.46 | -112.17 | -114.32 | -110.51 | -112.21 | -113.99 |

Note 3: Reference frequency 61 MHz
 Note 4: All spurs are referenced to carrier signal (n=0).



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
 P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661






The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Typical Performance Curves

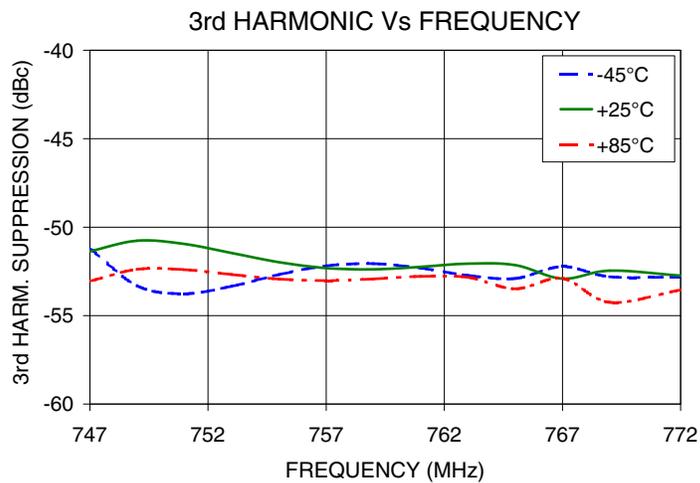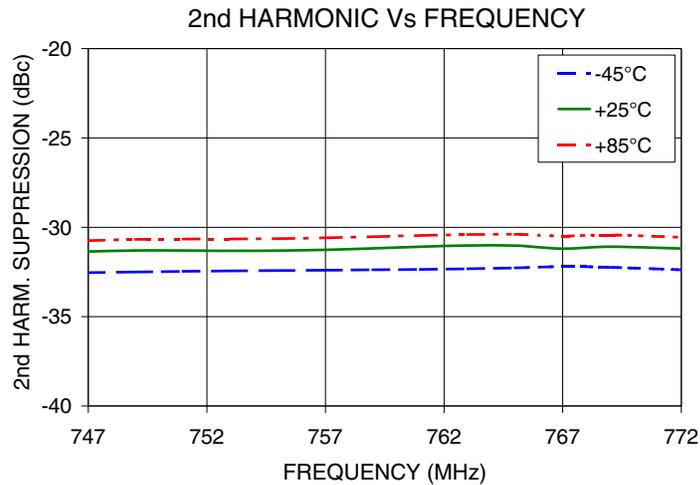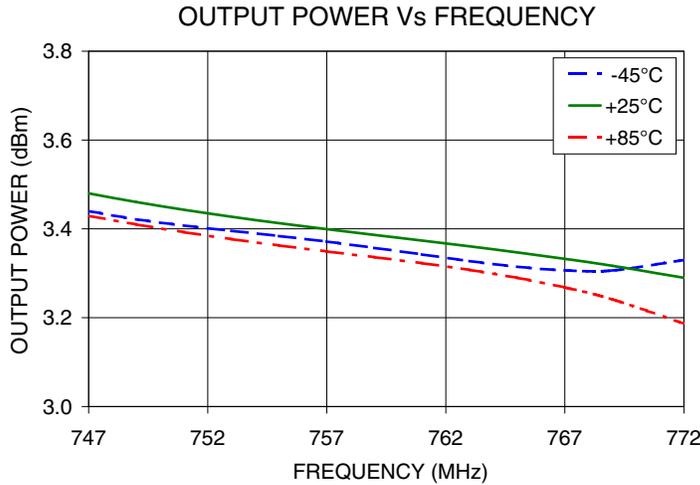

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
 P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.


PHASE NOISE @ 100Hz offset

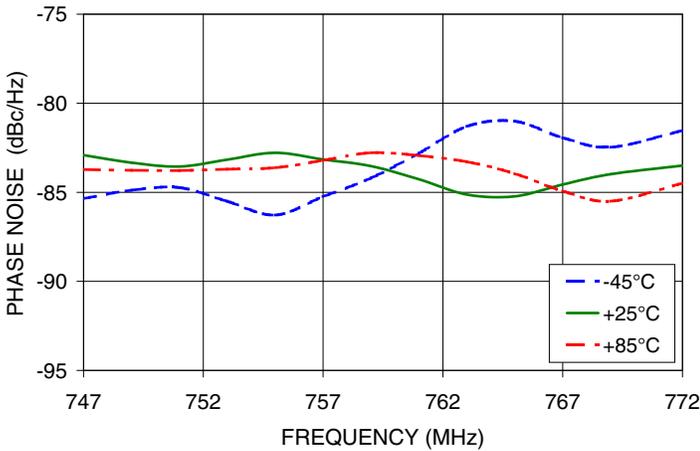


PHASE NOISE @ 1kHz offset

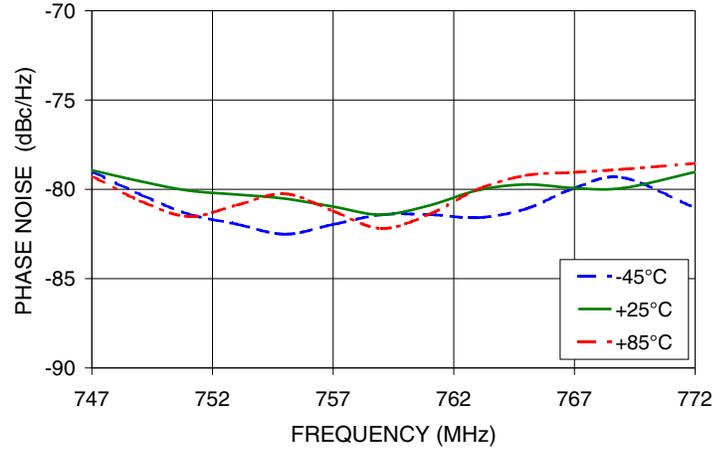


PHASE NOISE @ 10kHz offset

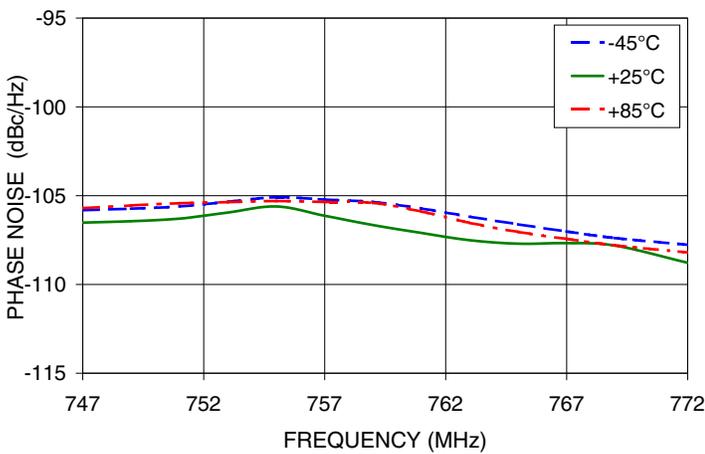

PHASE NOISE @ 100kHz offset

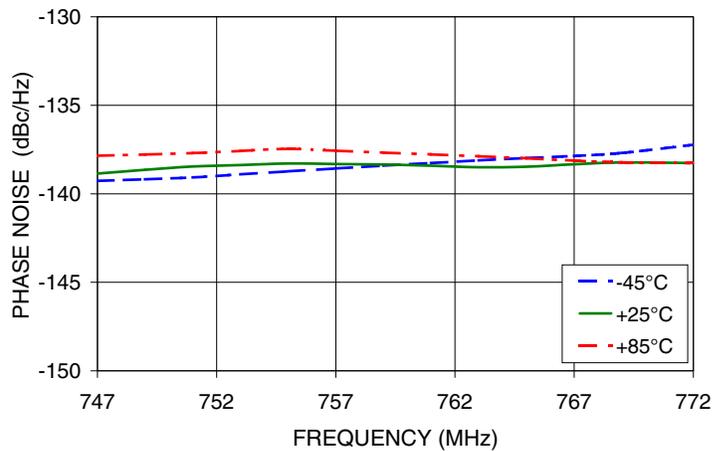

PHASE NOISE @ 1MHz offset

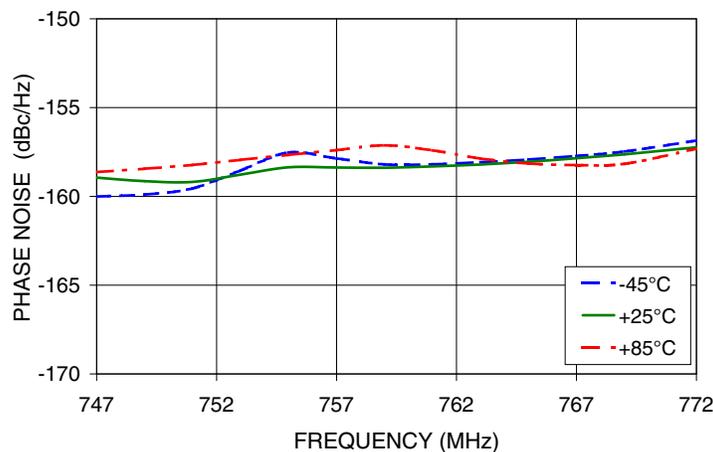

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant
 P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.


COMPARISON SPURIOUS
Vs FREQ. OFFSET @ Fcar = 747MHz

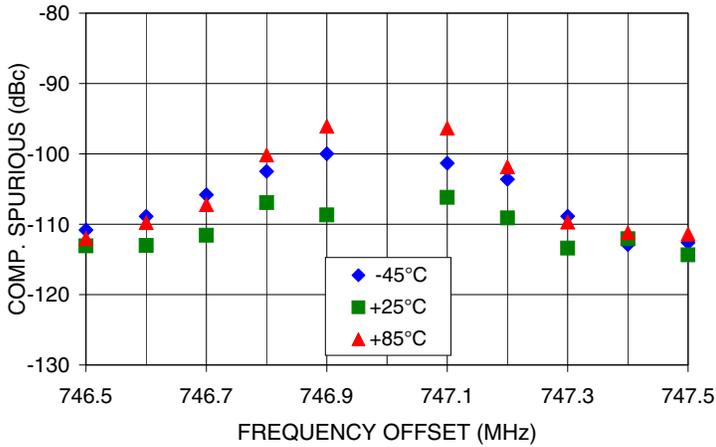


REFERENCE SPURIOUS
Vs FREQ. OFFSET @ Fcar = 747MHz

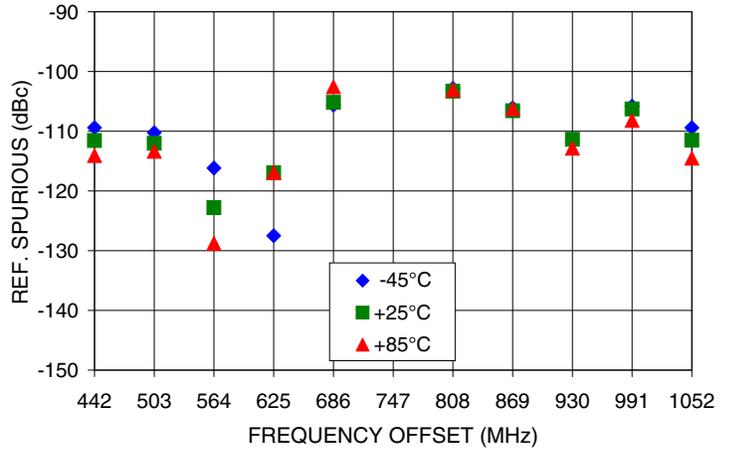


COMPARISON SPURIOUS
Vs FREQ. OFFSET @ Fcar = 760MHz

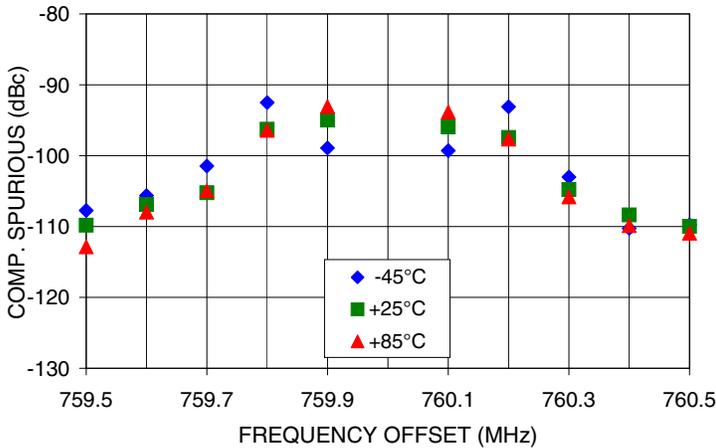


REFERENCE SPURIOUS
Vs FREQ. OFFSET @ Fcar = 760MHz

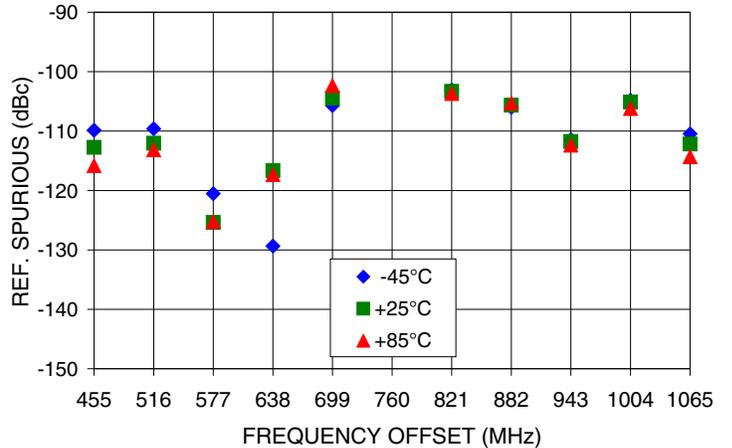

COMPARISON SPURIOUS
Vs FREQ. OFFSET @ Fcar = 772MHz

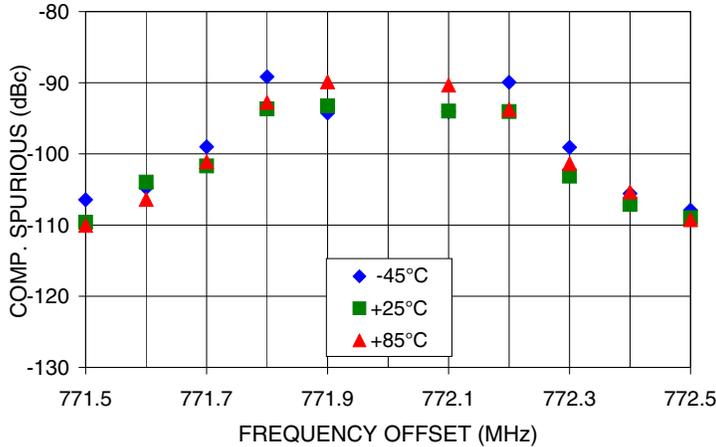

REFERENCE SPURIOUS
Vs FREQ. OFFSET @ Fcar = 772MHz

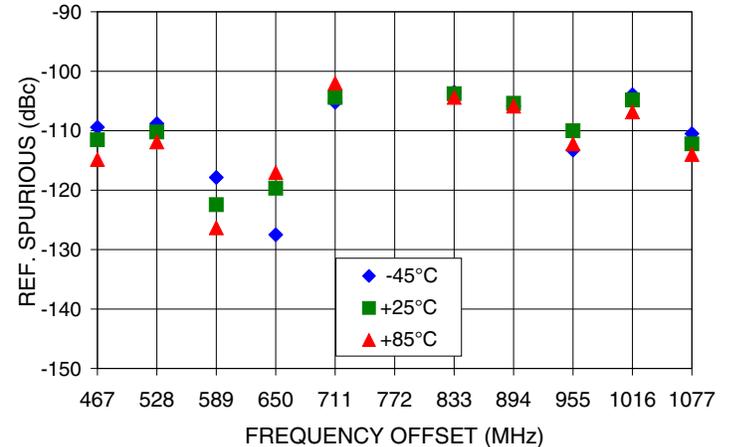

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Pin Configuration

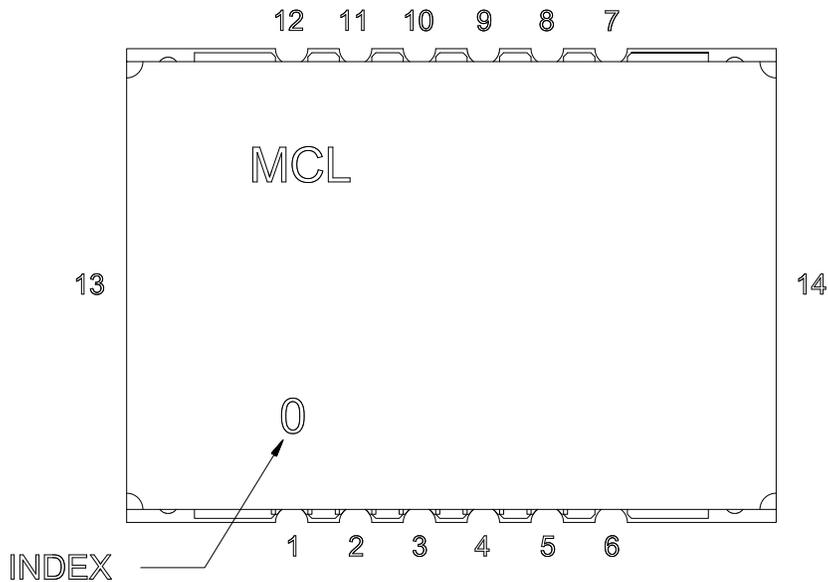


Pin Connection

| Pin Number | Function |
|------------|----------|
| 1 | VCC PLL |
| 2 | GND |
| 3 | REF IN |
| 4 | GND |
| 5 | VCC VCO |
| 6 | GND |
| 7 | RF OUT |
| 8 | GND |
| 9 | LOCK DET |
| 10 | CLOCK |
| 11 | DATA |
| 12 | LE |
| 13 | GND |
| 14 | GND |

Recommended Application Circuit

Note: REF IN and RF OUT ports are internally AC coupled.

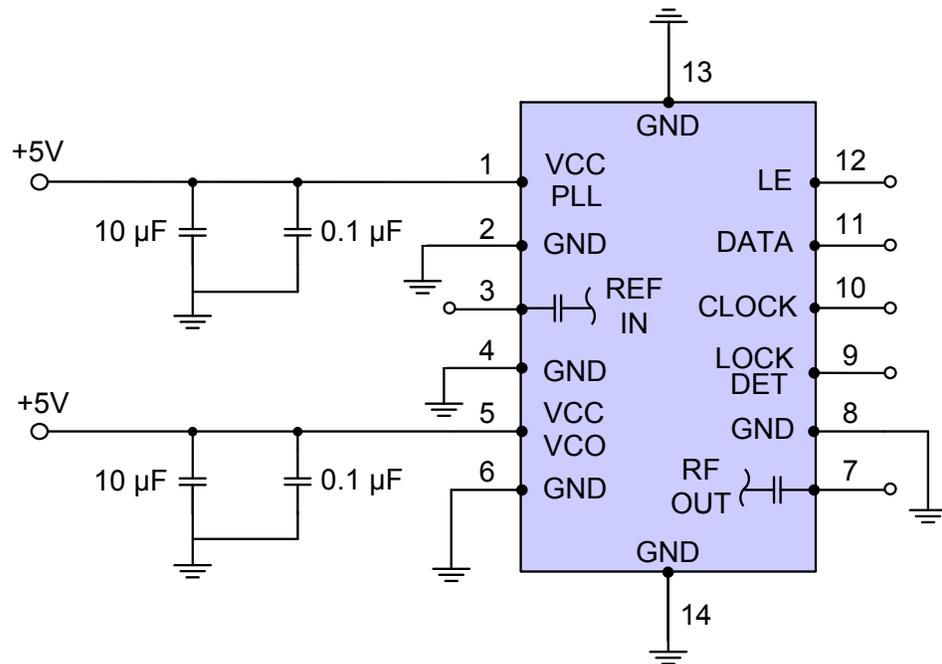

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
 P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Device Marking

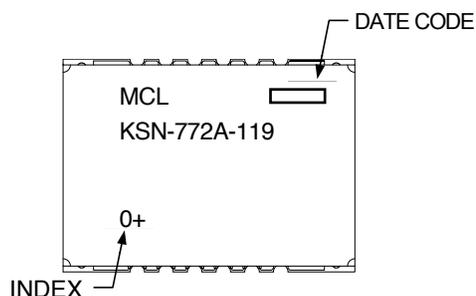

Additional Detailed Technical Information

Additional information is available on our web site. To access this information enter the model number on our web site home page.

Case Style: DK801

Tape & Reel: TR-F28

Suggested Layout for PCB Design: PL-249

Evaluation Board: TB-567+

Environment Ratings: ENV03T2



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.