



## VRLA Rechargeable Battery

# BP3-12 (BP3-12FR)



### FEATURES

- Maintenance free(no water topping-up required).
- No free acid(Non-spillable battery).
- Low self-discharge rate, lower than 3% capacity loss per month.
- Can be used in any orientation(excluding used inverted).

### APPLICATION

- UPS
- Electronic Toy-Cars
- Fans
- Emergency Lights
- Rechargeable Flashlights



### SPECIFICATIONS

Nominal Voltage	12 V
Nominal Capacity	3.0Ah @ 20 hour rate F.V.(1.75V/cell)
Approx. Weight	1300g(2.87lbs.)
Terminals	T1 (Faston Tab 187) T2 is optional
Internal Resistance	≤50m Ω (Fully Charged )
Max. Discharge Current	45 A (5 sec.)
Max. Charge Current	0.9 A
Operating Temperature Range	Charge : 0°C~40°C(32°F~104°F) Discharge : -20°C~50°C(-4°F~122°F) Storage. : -20°C~40°C(-4°F~104°F)
Container Material	ABS(UL94-HB, UL94-V0 is optional)

ISO 9001	
ISO14001	
UL	
CE	
<ul style="list-style-type: none"> <li>● IEC61056</li> <li>● JIS C 8702</li> <li>● GB/T 19639</li> </ul>	

### DIMENSION(mm/inch)

### OUTER DIMENSIONS

### TERMINAL TYPE

#### Length

134±1.5 (5.28±0.06)

#### Width


67±1.5 (2.64±0.06)

#### Container Height

60±1.5 (2.36±0.06)


#### Total Height

66±2.0 (2.60±0.08)

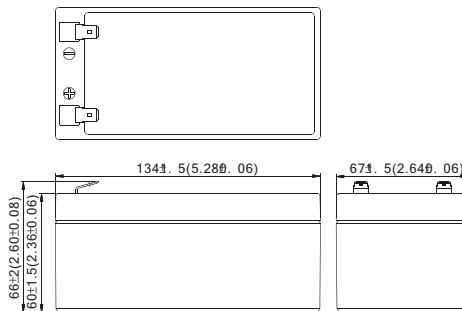


#### Terminal T1

3.2(0.13)



#### Terminal T2

3.4(0.13)



### Constant power discharge characteristics at 25 °C/77 °F

Unit: W

Discharge Time F.V. (V/cell)	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	108.5	79.8	64.0	38.07	21.83	8.74	6.029	3.369	1.773
1.75V	125.5	86.5	66.9	39.52	22.49	8.92	6.120	3.420	1.800
1.70V	133.4	89.6	69.0	40.42	22.89	9.00	6.153	3.437	1.812
1.65V	139.4	91.8	70.6	40.99	23.17	9.06	6.175	3.447	1.812
1.60V	144.0	93.6	72.0	41.40	23.40	9.12	6.193	3.447	1.812

### Constant current discharge characteristics at 25 °C/77 °F

Unit: A

Discharge Time F.V. (V/cell)	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	9.77	7.03	5.56	3.23	1.835	0.729	0.502	0.281	0.148
1.75V	11.52	7.61	5.82	3.35	1.890	0.743	0.510	0.285	0.150
1.70V	12.24	7.89	6.00	3.43	1.924	0.750	0.513	0.286	0.151
1.65V	12.79	8.08	6.14	3.47	1.947	0.755	0.515	0.287	0.151
1.60V	13.21	8.24	6.26	3.51	1.966	0.760	0.516	0.287	0.151

All data shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.