




BYS459-1500S, BYS459F-1500S, BYS459B-1500S

New Product

Vishay Semiconductors
formerly General Semiconductor



High Voltage Damper Diodes

Reverse Voltage 1500V
Forward Current 10A
Reverse Recovery Time 220ns

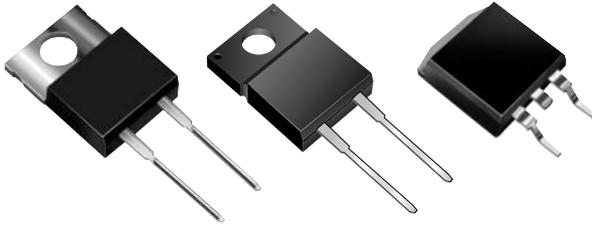


TO-220AC (BYS459)

ITO-220AC (BYS459F)

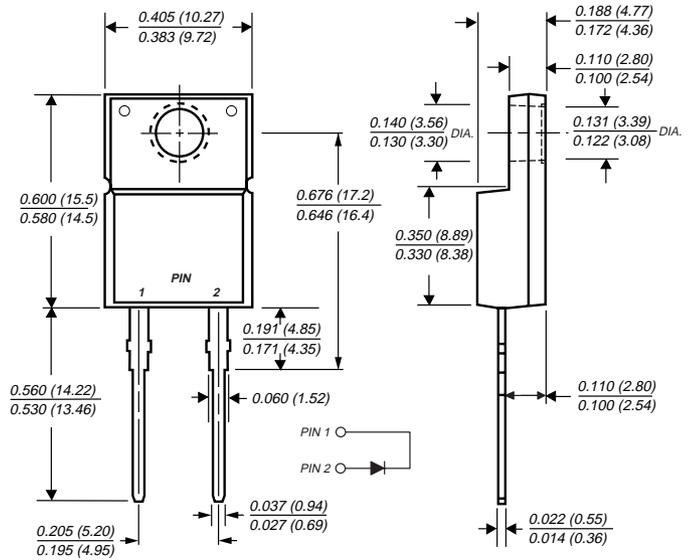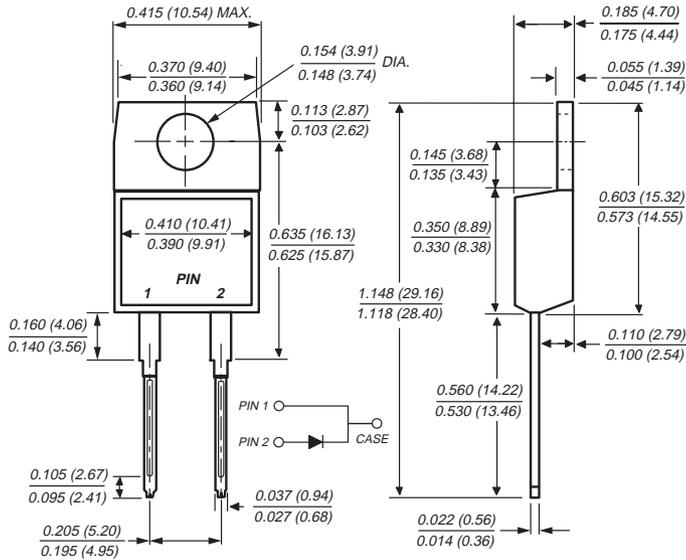


Mounting Pad Layout TO-263AB

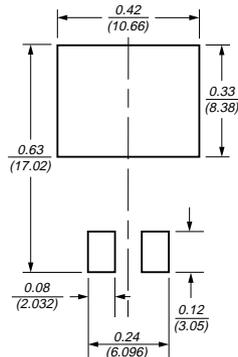

Dimensions in inches and millimeters

TO-263AB (BYS459B)

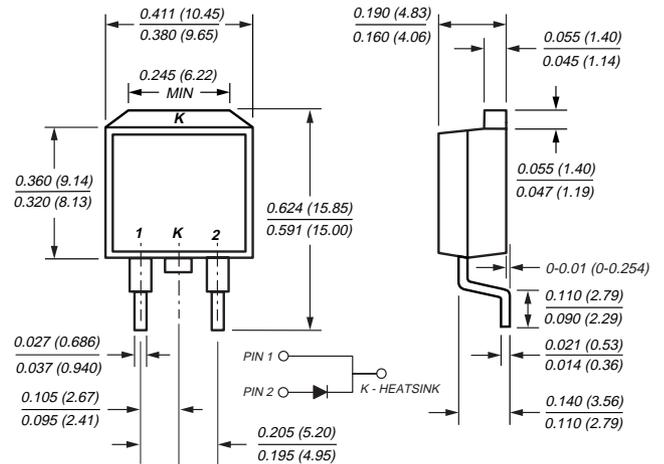

Features

- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- Ideally suited CRT horizontal deflection
- Fast reverse recovery time
- Fast forward recovery time
- Soft recovery characteristics
- Glass passivated chip junction

Mechanical Data

Case: JEDEC TO-220AC, ITO-220AC & TO-263AB
molded plastic body

Terminals: Plated leads, solderable per MIL-STD-750, Method 2026

High temperature soldering guaranteed:
250°C/10 seconds, 0.25" (6.35mm) from case for TO-220 & ITO-220; at terminals for TO-263

Polarity: As marked

Mounting Position: Any

Mounting Torque: 10 in-lbs maximum

Weight: 0.08 oz., 2.24 g

BYS459-1500S, BYS459F-1500S, BYS459B-1500S



Vishay Semiconductors
formerly General Semiconductor

Maximum Ratings (T_A = 25°C unless otherwise noted)

| Parameter | Symbol | Value | Unit |
|--|-----------------------------------|---|------|
| Maximum repetitive peak reverse voltage | V _{RRM} | 1500 | V |
| Maximum working reverse voltage | V _{RWM} | 1300 | V |
| Maximum DC blocking voltage | V _{DC} | 1500 | V |
| Maximum average forward rectified current (see fig. 1) | I _{F(AV)} | 10 | A |
| Peak working forward current at f = 82 kHz | I _{F(peak)} | 10 | A |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) at T _J = 150°C | I _{FSM} | 130 | A |
| Operating junction and storage temperature range | T _J , T _{STG} | -55 to +150 | °C |
| RMS Isolation voltage (BYS459F types only) from terminals to heatsink with t = 1.0 second, RH ≤ 30% | V _{ISOL} | 4500 ⁽¹⁾ 3500 ⁽²⁾ 1500 ⁽³⁾ | V |

Electrical Characteristics (T_J = 25°C unless otherwise noted)

| Parameter | Symbol | Value | Unit |
|---|-----------------|--------------|----------|
| Maximum instantaneous forward voltage ⁽⁴⁾ I _F = 6.5A, T _J = 25°C I _F = 6.5A, T _J = 125°C | V _F | 1.35 1.25 | V |
| Maximum DC reverse current at V _{RWM} T _J = 25°C T _J = 125°C | I _R | 250 1.0 | μA mA |
| Maximum reverse recovery time at I _F = 1.0A, di/dt = 50A/μs, V _R = 30V | t _{rr} | 220 | ns |
| Maximum reverse recovery charge at I _F = 2.0A, di/dt = 20A/μs, V _R = 30V | Q _{rr} | 0.95 | μC |
| Maximum forward recovery time I _F = 6.5A, di/dt = 52A/μs, V _{FR} = 5V | t _{fr} | 300 | ns |
| Peak forward recovery overshoot voltage I _F = 6.5A, di/dt = 52A/μs | V _{FP} | 27 | V |

Thermal Characteristics (T_A = 25°C unless otherwise noted)

| Parameter | Symbol | BYS459 | BYS459F | BYS459B | Unit |
|--|------------------|--------|---------|---------|------|
| Typical thermal resistance from junction to case | R _{θJC} | 2.0 | 4.0 | 2.0 | °C/W |

Notes:

- (1) Clip mounting (on case), where lead does not overlap heatsink with 0.110" offset
- (2) Clip mounting (on case), where leads do overlap heatsink
- (3) Screw mounting with 4-40 screw, where washer diameter is ≤ 4.9 mm (0.19")
- (4) Pulse test: 300μs pulse width, 1% duty cycle

Ordering Information

| Product | Case | Package Code | Package Option |
|---------------|-----------|--------------|---|
| BYS459-1500S | TO-220AC | 45 | Anti-Static tube, 50/tube, 2K/carton |
| BYS459F-1500S | ITO-220AC | 45 | Anti-Static tube, 50/tube, 2K/carton |
| BYS459B-1500S | TO-263AB | 31 | 13" reel, 800/reel, 4.8K/carton |
| | | 45 | Anti-Static tube, 50/tube, 2K/carton |
| | | 81 | Anti-Static 13" reel, 800/reel, 4.8K/carton |



Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 – Forward Current Derating Curve

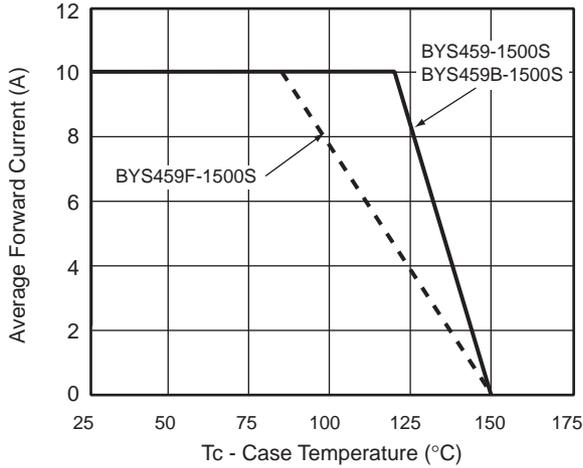


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current

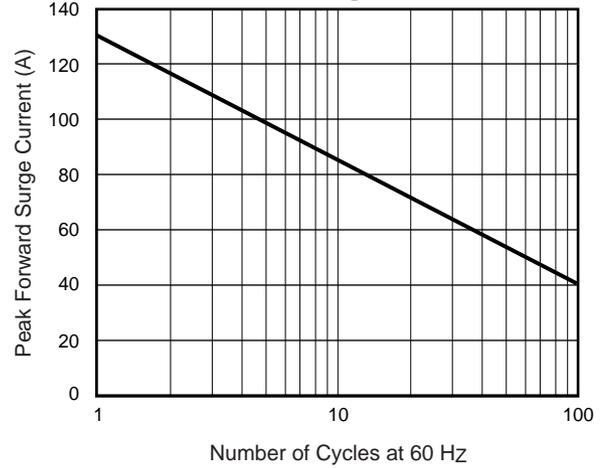


Fig. 3 – Typical Forward Voltage

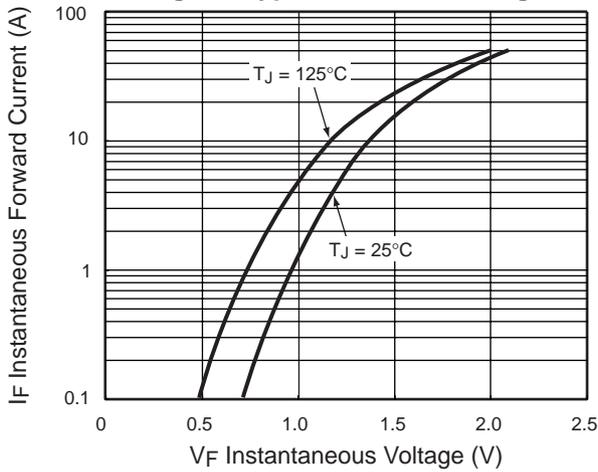


Fig. 4 – Typical Reverse Current

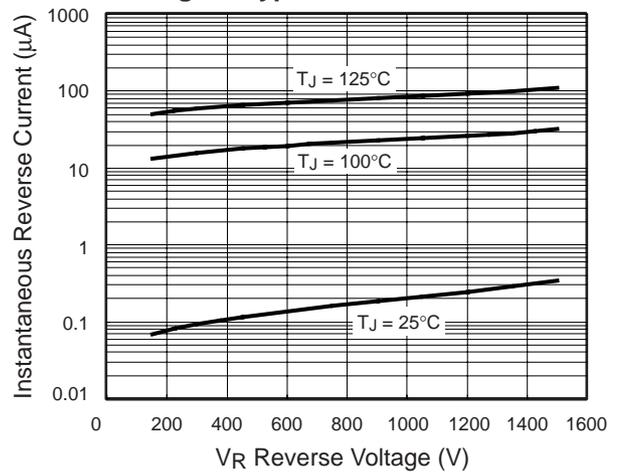


Fig. 5 – Typical Capacitance


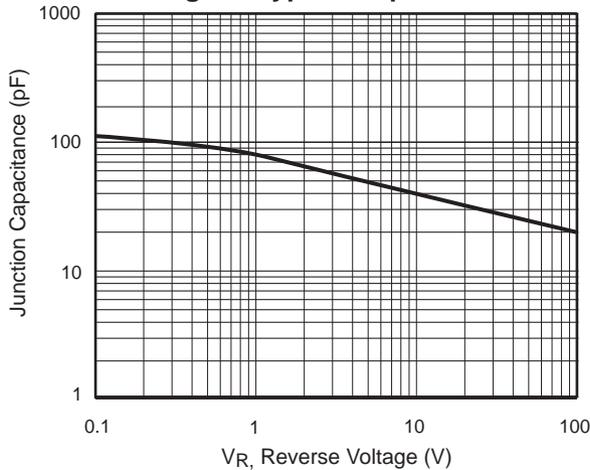


Fig. 6 – Typical Reverse Recovery Time



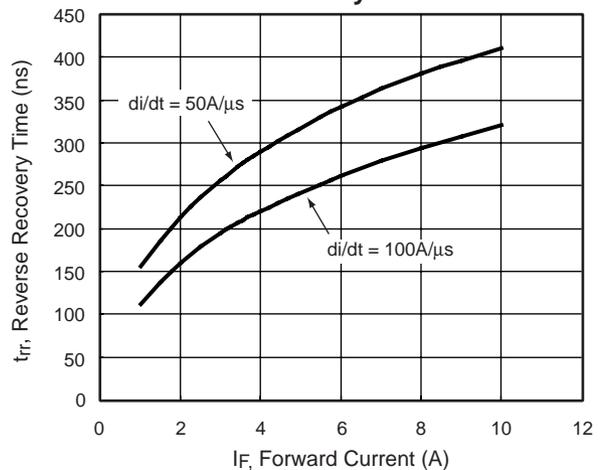

Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.