

Rectifier diodes schottky barrier

PBYR745X series

GENERAL DESCRIPTION

Low leakage, platinum barrier, schottky rectifier diodes in a full pack plastic envelope featuring low forward voltage drop, absence of stored charge, and guaranteed reverse surge capability. The devices are intended for use in switched mode power supplies and high frequency circuits in general where low conduction and zero switching losses are important.


QUICK REFERENCE DATA

SYMBOL	PARAMETER	MAX.	MAX.	MAX.	UNIT
		35X	40X	45X	
V_{RRM}	Repetitive peak reverse voltage	35	40	45	V
V_F	Forward voltage	0.57	0.57	0.57	V
$I_{F(AV)}$	Average forward current	7.5	7.5	7.5	A


PINNING - SOD113

PIN	DESCRIPTION
1	cathode
2	anode
case	isolated

PIN CONFIGURATION



SYMBOL

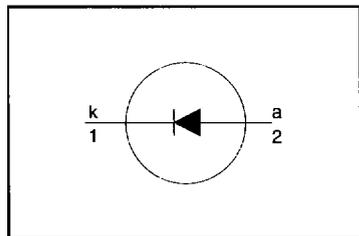

LIMITING VALUES

Limiting values in accordance with the Absolute Maximum System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.			UNIT
				-35	-40	-45	
V_{RRM}	Repetitive peak reverse voltage	$T_{hs} \leq 128 \text{ }^\circ\text{C}$	-	35	40	45	V
V_{RWM}	Crest working reverse voltage		-	35	40	45	V
V_R	Continuous reverse voltage		-	35	40	45	V
$I_{F(AV)}$	Average forward current	square wave; $\delta = 0.5$; $T_{hs} \leq 123 \text{ }^\circ\text{C}$	-	7.5			A
$I_{F(RMS)}$	RMS output current	$t = 25 \text{ } \mu\text{s}$; $\delta = 0.5$; $T_{hs} \leq 123 \text{ }^\circ\text{C}$	-	10.6			A
I_{FRM}	Repetitive peak forward current		-	15			A
I_{FSM}	Non-repetitive peak forward current	$t = 10 \text{ ms}$	-	100			A
		$t = 8.3 \text{ ms}$	-	110			A
I^2t	I^2t for fusing	sinusoidal $T_i = 125 \text{ }^\circ\text{C}$ prior to surge; with reapplied $V_{RRM(max)}$ $t = 10 \text{ ms}$	-	50			A^2s
I_{RRM}	Repetitive peak reverse current	$t_p = 2 \text{ } \mu\text{s}$; $\delta = 0.001$	-	1			A
I_{RSM}	Non-repetitive peak reverse current	$t_p = 100 \text{ } \mu\text{s}$	-	1			A
T_{stg}	Storage temperature		-65	175			$^\circ\text{C}$
T_j	Operating junction temperature		-	150			$^\circ\text{C}$

**Rectifier diodes
schottky barrier**
PBYR745X series
ISOLATION LIMITING VALUE & CHARACTERISTIC
 $T_{hs} = 25\text{ °C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
V_{isol}	R.M.S. isolation voltage from all three terminals to external heatsink	$f = 50\text{--}60\text{ Hz}$; sinusoidal waveform; $R.H. \leq 65\%$; clean and dustfree	-		2500	V
C_{isol}	Capacitance from T2 to external heatsink	$f = 1\text{ MHz}$	-	10	-	pF

THERMAL RESISTANCES

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$R_{th\ j\text{-}hs}$	Thermal resistance junction to heatsink	with heatsink compound	-	-	5.5	K/W
$R_{th\ j\text{-}a}$	Thermal resistance junction to ambient	in free air.	-	55	-	K/W

STATIC CHARACTERISTICS
 $T_j = 25\text{ °C}$ unless otherwise stated

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
V_F	Forward voltage	$I_F = 7.5\text{ A}$; $T_j = 125\text{ °C}$ $I_F = 15\text{ A}$; $T_j = 125\text{ °C}$	-	0.50 0.62	0.59 0.72	V V
I_R	Reverse current	$I_F = 15\text{ A}$ $V_R = V_{RRM}$	-	0.78 50	0.84 100	V μA
C_d	Junction capacitance	$V_R = V_{RRM}$; $T_j = 125\text{ °C}$ $f = 1\text{ MHz}$; $V_R = 5\text{ V}$; $T_j = 25\text{ °C}$ to 125 °C	-	13 350	22 -	mA pF

Rectifier diodes
schottky barrier

PBYR745X series

