


## CDSV6-99SD-G

**Reverse Voltage: 75 Volts**  
**Forward Current: 215 mA**  
**RoHS Device**





### Features

- Design for mounting on small surface.
- High speed switching.
- Ultra small surface mount package.
- Two BAV99 circuits in one package.

### Mechanical data

- Case: SOT-363, molded plastic.
- Terminals: solderable per MIL-STD-750, method 2026.
- Approx. weight: 0.006 grams

### Circuit diagram

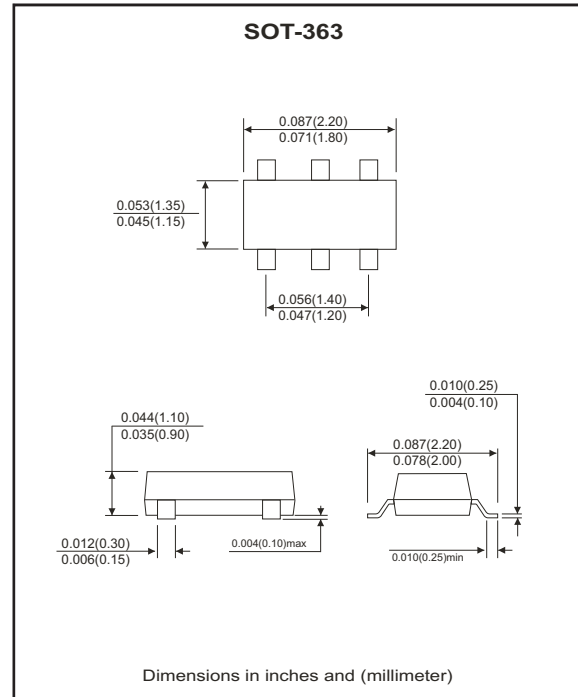

### Maximum Ratings and Electrical Characteristics

(at Ta=25 °C unless otherwise noted)

Parameter	Symbol	Conditions	Value	Units
Repetitive peak reverse voltage	V <sub>RRM</sub>		75	V
Reverse voltage	V <sub>R</sub>		75	V
Forward current	I <sub>F</sub>		215	mA
Peak surge forward current	I <sub>FSM</sub>	T=1.0 μS	2	A
Power dissipation	P <sub>D</sub>		200	mW
Maximum forward voltage	V <sub>F</sub>	@I <sub>F</sub> =1mA	0.715	V
		@I <sub>F</sub> =10mA	0.855	
		@I <sub>F</sub> =50mA	1.0	
		@I <sub>F</sub> =100mA	1.25	
Maximum reverse current	I <sub>R</sub>	@V <sub>R</sub> =20V	0.025	μA
		@V <sub>R</sub> =75V	2.5	
		@V <sub>R</sub> =25V, T <sub>J</sub> =150 °C	30	
		@V <sub>R</sub> =75V, T <sub>J</sub> =150 °C	50	
Maximum reverse recovery time	T <sub>rr</sub>	I <sub>F</sub> =I <sub>R</sub> =10mA, R <sub>L</sub> =100Ω	4	nS
Typical diode capacitance	C <sub>T</sub>	V <sub>R</sub> =0V, f=1.0MHz	2	pF
Maximum junction temperature	T <sub>J</sub>		150	°C
Storage temperature	T <sub>STG</sub>		-55 to +150	°C

## RATING AND CHARACTERISTIC CURVES (CDSV6-99SD-G)

Fig.1 - Forward Characteristics

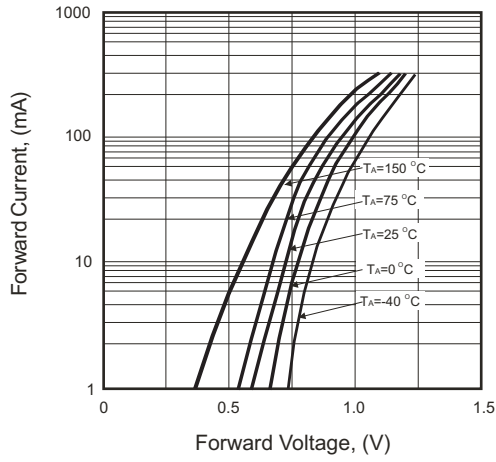


Fig.2 - Reverse Characteristics

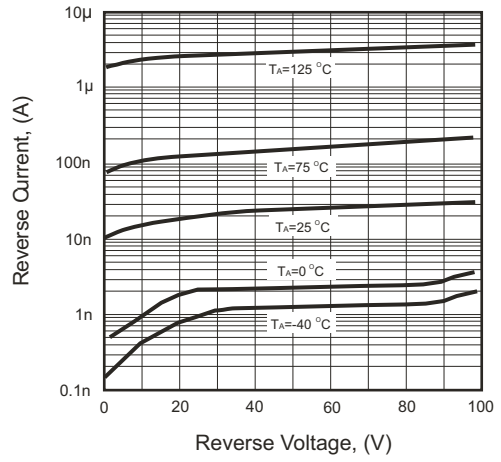


Fig.3 - Capacitance Between Terminals Characteristics

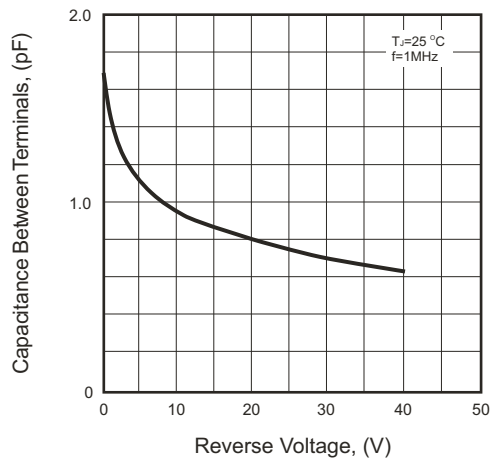


Fig.4 - Power Derating Curve

