

High Voltage Ceramic Chip Capacitors



Introduction

Cal-Chip Electronics, Incorporated operates a policy of continuous development for its ranges of Multilayer Ceramic Capacitors. Our unique construction process ensures excellent volumetric efficiency and stability of capacitance with temperature. High Voltage Chip MLC's have extended values in the 500V series to those previously offered, together with voltage ranges up to 10kV.

Handling


Ceramics are dense, hard, brittle and abrasive materials. They are liable to suffer mechanical damage in the form of chips or cracks, if improperly handled. MLC's should never be handled with metallic instruments.

DIELECTRIC CHARACTERISTICS

| | COG / NPO | X7R | Y5V & Z5U |
|--|---|---|--------------------|
| Dielectric classification: | Ultra Stable | Stable | General Purpose |
| Rated temperature range: | -55°C to +125°C | -55°C to +125°C | +10°C to +85°C |
| Maximum capacitance change over temperature range | 0±30ppm/°C | ±15% | +22 to -56% |
| Tangent of loss angle (tan δ) | Cr>50pF≤0.0015 Cr≤50pF=0.0015 (15+0.7) Cr | ≤0.025 | ≤0.030 |
| Insulation resistance (Ri) Time Constant (Ri X Cr) (whichever is less) | 100GΩ or 1000s | 100GΩ or 1000s | 10GΩ or 100s |
| Capacitance tolerance | <10pF ±0.25, ±0.5pF ≥10pF ±1, ±2, ±5, ±10% | +5%, ±10%, ±20% | ±20%, -20+80% |
| Proof Voltage 500V ≥1kV | 1.5 x rated volts 1.5 x rated volts | 1.5 x rated volts 1.25 x rated volts | 1.5 x rated volts |
| Climatic category (IEC) | 55/125/56 | 55/125/56 | 25/085/56 |
| Aging characteristic (Typ.) | Zero | 1% per time decade | 6% per time decade |

SURFACE MOUNT CHIP CAPACITORS

Ordering Information

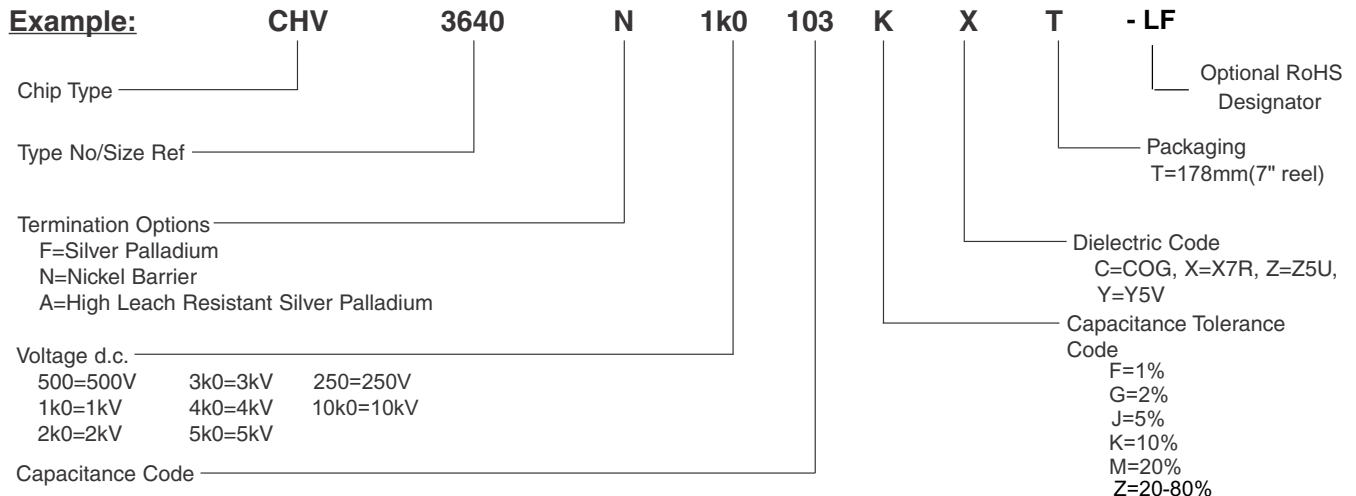



| | | CHV1206 | | | CHV1210 | | | CHV1812 | | | CHV2220 | | | CHV2225 | | | CHV3640 | | CHV5550 | | CHV8060 | | | | |
|------------------|--------|-------------|------|-----|-------------|-----|------|-------------|------|-----|-------------|-----|------|-------------|------|-----|-----------|-----|-----------|-----|-----------|-----|------|-----|------|
| Type | | 1206 | | | 1210 | | | 1812 | | | 2220 | | | 2225 | | | 3640 | | 5550 | | 8060 | | | | |
| Length | mm | 3.2±0.3 | | | 3.2±0.3 | | | 4.5±0.35 | | | 5.7±0.5 | | | 5.7±0.5 | | | 9.2±0.5 | | 14.0±0.5 | | 20.3±0.5 | | | | |
| | Inches | 0.125±0.012 | | | 0.125±0.012 | | | 0.18±0.014 | | | 0.225±0.020 | | | 0.225±0.020 | | | 0.36±0.02 | | 0.55±0.02 | | 0.80±0.02 | | | | |
| Width | mm | 1.6±0.2 | | | 2.5±0.3 | | | 3.2±0.3 | | | 5.0±0.5 | | | 6.3±0.5 | | | 10.16±0.5 | | 12.7±0.5 | | 15.24±0.5 | | | | |
| | Inches | 0.063±0.008 | | | 0.10±0.012 | | | 0.125±0.012 | | | 0.197±0.020 | | | 0.25±0.020 | | | 0.40±0.02 | | 0.50±0.02 | | 0.60±0.02 | | | | |
| Thickness | mm | 1.6 | | | 1.8 | | | 1.8 | | | 1.8 | | | 1.8 | | | 2.0 | | 2.5 | | 2.5 | | | | |
| | Inches | 0.063 | | | 0.07 | | | 0.07 | | | 0.07 | | | 0.07 | | | 0.08 | | 0.1 | | 0.1 | | | | |
| Termination Band | Min | | Max | | Min | | Max | | Min | | Max | | Min | | Max | | Min | | Max | | Min | | Max | | |
| | 0.25 | | 0.75 | | 0.25 | | 0.75 | | 0.25 | | 0.75 | | 0.25 | | 0.75 | | 0.5 | | 1.5 | | 0.5 | | 1.5 | | |
| | Inches | | 0.01 | | 0.03 | | 0.01 | | 0.03 | | 0.01 | | 0.03 | | 0.01 | | 0.03 | | 0.02 | | 0.06 | | 0.02 | | 0.06 |
| Dielectric | | COG | X7R | Z5U | COG | X7R | Z5U | COG | X7R | Z5U | COG | X7R | Z5U | COG | X7R | Z5U | COG | X7R | COG | X7R | COG | X7R | COG | X7R | |
| Cap. Range | Code | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.0pF | 1R0 | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.2 | 1R2 | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.5 | 1R5 | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.8 | 1R8 | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.2 | 2R2 | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.7 | 2R7 | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.3 | 3R3 | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.9 | 3R9 | | | | | | | | | | | | | | | | | | | | | | | | |
| 4.7 | 4R7 | | | | | | | | | | | | | | | | | | | | | | | | |
| 5.6 | 5R6 | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.8 | 6R8 | | | | | | | | | | | | | | | | | | | | | | | | |
| 8.2 | 8R2 | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | 100 | | | | | | | | | | | | | | | | | | | | | | | | |
| 12 | 120 | | | | | | | | | | | | | | | | | | | | | | | | |
| 15 | 150 | | | | | | | | | | | | | | | | | | | | | | | | |
| 18 | 180 | | | | | | | | | | | | | | | | | | | | | | | | |
| 22 | 220 | | | | | | | | | | | | | | | | | | | | | | | | |
| 27 | 270 | | | | | | | | | | | | | | | | | | | | | | | | |
| 33 | 330 | | | | | | | | | | | | | | | | | | | | | | | | |
| 39 | 390 | | | | | | | | | | | | | | | | | | | | | | | | |
| 47 | 470 | | | | | | | | | | | | | | | | | | | | | | | | |
| 56 | 560 | | | | | | | | | | | | | | | | | | | | | | | | |
| 68 | 680 | | | | | | | | | | | | | | | | | | | | | | | | |
| 82 | 820 | | | | | | | | | | | | | | | | | | | | | | | | |
| 100 | 101 | | | | | | | | | | | | | | | | | | | | | | | | |
| 120 | 121 | | | | | | | | | | | | | | | | | | | | | | | | |
| 150 | 151 | | | | | | | | | | | | | | | | | | | | | | | | |
| 180 | 181 | | | | | | | | | | | | | | | | | | | | | | | | |
| 220 | 221 | | | | | | | | | | | | | | | | | | | | | | | | |
| 270 | 271 | | | | | | | | | | | | | | | | | | | | | | | | |
| 330 | 331 | | | | | | | | | | | | | | | | | | | | | | | | |
| 390 | 391 | | | | | | | | | | | | | | | | | | | | | | | | |
| 470 | 471 | | | | | | | | | | | | | | | | | | | | | | | | |
| 560 | 561 | | | | | | | | | | | | | | | | | | | | | | | | |
| 680 | 681 | | | | | | | | | | | | | | | | | | | | | | | | |
| 820 | 821 | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.0nF | 102 | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.2 | 122 | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.5 | 152 | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.8 | 182 | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.2 | 222 | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.7 | 272 | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.3 | 332 | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.9 | 392 | | | | | | | | | | | | | | | | | | | | | | | | |
| 4.7 | 472 | | | | | | | | | | | | | | | | | | | | | | | | |
| 5.6 | 562 | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.8 | 682 | | | | | | | | | | | | | | | | | | | | | | | | |
| 8.2 | 822 | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | 103 | | | | | | | | | | | | | | | | | | | | | | | | |
| 12 | 123 | | | | | | | | | | | | | | | | | | | | | | | | |
| 15 | 153 | | | | | | | | | | | | | | | | | | | | | | | | |
| 18 | 183 | | | | | | | | | | | | | | | | | | | | | | | | |
| 22 | 223 | | | | | | | | | | | | | | | | | | | | | | | | |
| 27 | 273 | | | | | | | | | | | | | | | | | | | | | | | | |
| 33 | 333 | | | | | | | | | | | | | | | | | | | | | | | | |
| 39 | 393 | | | | | | | | | | | | | | | | | | | | | | | | |
| 47 | 473 | | | | | | | | | | | | | | | | | | | | | | | | |
| 56 | 563 | | | | | | | | | | | | | | | | | | | | | | | | |
| 68 | 683 | | | | | | | | | | | | | | | | | | | | | | | | |
| 82 | 823 | | | | | | | | | | | | | | | | | | | | | | | | |
| 100 | 104 | | | | | | | | | | | | | | | | | | | | | | | | |
| 120 | 124 | | | | | | | | | | | | | | | | | | | | | | | | |
| 150 | 154 | | | | | | | | | | | | | | | | | | | | | | | | |
| 180 | 184 | | | | | | | | | | | | | | | | | | | | | | | | |
| 220 | 224 | | | | | | | | | | | | | | | | | | | | | | | | |
| 270 | 274 | | | | | | | | | | | | | | | | | | | | | | | | |
| 330 | 334 | | | | | | | | | | | | | | | | | | | | | | | | |
| 390 | 394 | | | | | | | | | | | | | | | | | | | | | | | | |
| 470 | 474 | | | | | | | | | | | | | | | | | | | | | | | | |
| 560 | 564 | | | | | | | | | | | | | | | | | | | | | | | | |
| 680 | 684 | | | | | | | | | | | | | | | | | | | | | | | | |
| 820 | 824 | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.0uF | 105 | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.2 | 125 | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.5 | 155 | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.8 | 185 | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.2 | 225 | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.7 | 275 | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.3 | 335 | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.9 | 395 | | | | | | | | | | | | | | | | | | | | | | | | |
| 4.7 | 475 | | | | | | | | | | | | | | | | | | | | | | | | |
| 5.6 | 565 | | | | | | | | | | | | | | | | | | | | | | | | |
| 6.8 | 685 | | | | | | | | | | | | | | | | | | | | | | | | |
| 8.2 | 825 | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | 106 | | | | | | | | | | | | | | | | | | | | | | | | |
| 22 | 226 | | | | | | | | | | | | | | | | | | | | | | | | |
| 33 | 336 | | | | | | | | | | | | | | | | | | | | | | | | |
| 47 | 476 | | | | | | | | | | | | | | | | | | | | | | | | |




High Voltage Ceramic Chip Capacitors- COG & X7R (3kV, 4kV and 5kV)

| | | CHV1812 | | | CHV2220 | | | CHV2225 | | | CHV3640 | | | CHV5550 | | | CHV8060 | | | | |
|------------------|--------|-------------|------|-----|-------------|------|------|-------------|------|------|------------|------|------|-----------|------|------|-----------|------|-----|-----|-----|
| Type | | 1812 | | | 2220 | | | 2225 | | | 3640 | | | 5550 | | | 8060 | | | | |
| Length | mm | 4.5±0.35 | | | 5.7±0.5 | | | 5.7±0.5 | | | 9.2±0.5 | | | 14.0±0.5 | | | 20.3±0.5 | | | | |
| | Inches | 0.18±0.014 | | | 0.225±0.020 | | | 0.225±0.020 | | | 0.36±0.020 | | | 0.55±0.02 | | | 0.80±0.02 | | | | |
| Width | mm | 3.2±0.3 | | | 5.0±0.5 | | | 6.3±0.5 | | | 10.2±0.5 | | | 12.7±0.5 | | | 15.2±0.5 | | | | |
| | Inches | 0.126±0.012 | | | 0.197±0.020 | | | 0.25±0.020 | | | 0.40±0.020 | | | 0.50±0.02 | | | 0.60±0.02 | | | | |
| Thickness | mm | 4.0 | | | 4.0 | | | 4.0 | | | 2.5 | | | 2.5 | | | 2.5 | | | | |
| | Inches | 0.157 | | | 0.157 | | | 0.157 | | | 0.1 | | | 0.1 | | | 0.1 | | | | |
| Termination Band | | Min | Max | | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | | | |
| | mm | 0.25 | 0.75 | | 0.25 | 0.75 | 0.25 | 0.75 | 0.5 | 1.5 | 0.5 | 1.5 | 0.5 | 1.5 | 0.5 | 1.5 | 0.5 | 1.5 | | | |
| | Inches | 0.01 | 0.03 | | 0.01 | 0.03 | 0.01 | 0.03 | 0.02 | 0.06 | 0.02 | 0.06 | 0.02 | 0.06 | 0.02 | 0.06 | 0.02 | 0.06 | | | |
| Dielectric | | COG | | X7R | | COG | | X7R | | COG | | X7R | | COG | | X7R | | COG | | X7R | |
| Voltage | | 3kV | 4kV | 3kV | 4kV | 3kV | 4kV | 3kV | 4kV | 3kV | 4kV | 3kV | 4kV | 3kV | 4kV | 3kV | 4kV | 3kV | 4kV | 3kV | 4kV |
| Cap Range | Code | | | | | | | | | | | | | | | | | | | | |
| 10pF | 100 | | | | | | | | | | | | | | | | | | | | |
| 12 | 120 | | | | | | | | | | | | | | | | | | | | |
| 15 | 150 | | | | | | | | | | | | | | | | | | | | |
| 18 | 180 | | | | | | | | | | | | | | | | | | | | |
| 22 | 220 | | | | | | | | | | | | | | | | | | | | |
| 27 | 270 | | | | | | | | | | | | | | | | | | | | |
| 33 | 330 | | | | | | | | | | | | | | | | | | | | |
| 39 | 390 | | | | | | | | | | | | | | | | | | | | |
| 47 | 470 | | | | | | | | | | | | | | | | | | | | |
| 56 | 560 | | | | | | | | | | | | | | | | | | | | |
| 68 | 680 | | | | | | | | | | | | | | | | | | | | |
| 82 | 820 | | | | | | | | | | | | | | | | | | | | |
| 100 | 101 | | | | | | | | | | | | | | | | | | | | |
| 120 | 121 | | | | | | | | | | | | | | | | | | | | |
| 150 | 151 | | | | | | | | | | | | | | | | | | | | |
| 180 | 181 | | | | | | | | | | | | | | | | | | | | |
| 220 | 221 | | | | | | | | | | | | | | | | | | | | |
| 270 | 271 | | | | | | | | | | | | | | | | | | | | |
| 330 | 331 | | | | | | | | | | | | | | | | | | | | |
| 390 | 391 | | | | | | | | | | | | | | | | | | | | |
| 470 | 471 | | | | | | | | | | | | | | | | | | | | |
| 560 | 561 | | | | | | | | | | | | | | | | | | | | |
| 680 | 681 | | | | | | | | | | | | | | | | | | | | |
| 820 | 821 | | | | | | | | | | | | | | | | | | | | |
| 1.0nF | 102 | | | | | | | | | | | | | | | | | | | | |
| 1.2 | 122 | | | | | | | | | | | | | | | | | | | | |
| 1.5 | 152 | | | | | | | | | | | | | | | | | | | | |
| 1.8 | 182 | | | | | | | | | | | | | | | | | | | | |
| 2.2 | 222 | | | | | | | | | | | | | | | | | | | | |
| 2.7 | 272 | | | | | | | | | | | | | | | | | | | | |
| 3.3 | 332 | | | | | | | | | | | | | | | | | | | | |
| 3.9 | 392 | | | | | | | | | | | | | | | | | | | | |
| 4.7 | 472 | | | | | | | | | | | | | | | | | | | | |
| 5.6 | 562 | | | | | | | | | | | | | | | | | | | | |
| 6.8 | 682 | | | | | | | | | | | | | | | | | | | | |
| 8.2 | 822 | | | | | | | | | | | | | | | | | | | | |
| 10 | 103 | | | | | | | | | | | | | | | | | | | | |
| 12 | 123 | | | | | | | | | | | | | | | | | | | | |
| 15 | 153 | | | | | | | | | | | | | | | | | | | | |
| 18 | 183 | | | | | | | | | | | | | | | | | | | | |
| 22 | 223 | | | | | | | | | | | | | | | | | | | | |
| 27 | 273 | | | | | | | | | | | | | | | | | | | | |
| 33 | 333 | | | | | | | | | | | | | | | | | | | | |
| 39 | 393 | | | | | | | | | | | | | | | | | | | | |
| 47 | 473 | | | | | | | | | | | | | | | | | | | | |
| 56 | 563 | | | | | | | | | | | | | | | | | | | | |
| 68 | 683 | | | | | | | | | | | | | | | | | | | | |
| 82 | 823 | | | | | | | | | | | | | | | | | | | | |
| 100 | 104 | | | | | | | | | | | | | | | | | | | | |


Surface Mount Chip Capacitors: Tape and Reel packaging information



Tape and reel packing of surface mounting chip capacitors for automatic placement are in accordance with IEC286 part 3 and RS481

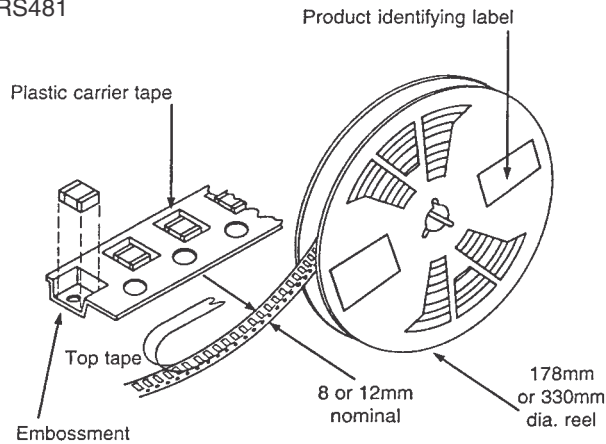

Reel dimensions mm (inches)

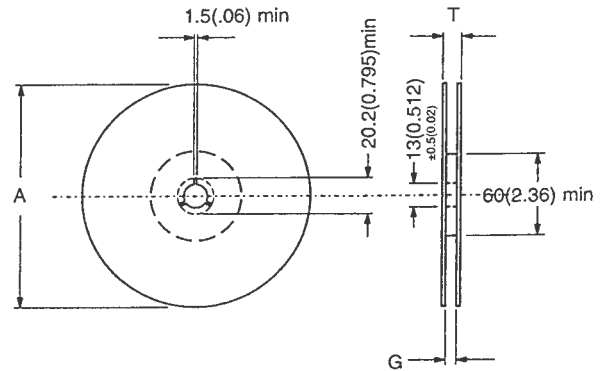


| Symbol | Description | 178mm reel | 330mm reel |
|--------|-------------------|-------------------------|--------------------------|
| A | Reel diameter | 178(7) ±2(0.079) | 330(13) max |
| G | Reel inside with | 8.4(0.33) ±1.5(0.059)-0 | 12.4(0.49) ±1.5(0.059)-0 |
| T | Reel outside with | 14.4(0.56) max | 18.4(0.72) max |

Peel force

The peel force of the top sealing tape is between 0.2 and 1.0 Newton at 1800. The breaking force of the carrier and sealing tape in the direction of unreeling is greater than 10 Newtons.

Tape dimensions mm (inches)

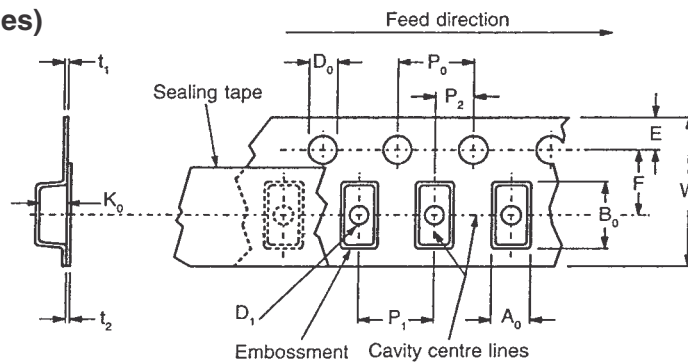

| Symbol | Description | 8mm tape | 12mm tape |
|--|--|---|--------------------------|
| A ₀ B ₀ K ₀ | Width of cavity Length of cavity Depth of cavity | Dependent on chip size to minimize rotation | |
| W | Width of tape | 8(0.315) ±0.2(0.008) | 12(0.472) ±0.2(0.008) |
| F | Distance between drive hole centres and cavity centres | 3.5(0.138) ±0.05(0.002) | 5.5(0.213) ±0.05(0.002) |
| E | Distance between drive hole centres and tape edge | 1.75(0.069) ±0.1(0.004) | |
| P ₁ | Distance between cavity centres | 4(0.156) ±0.1(0.004) | 8(0.315) ±0.1(0.004) |
| P ₂ | Axial distance between drive hole centres and cavity centres | 2(0.079) ±0.05(0.002) | |
| P ₀ | Axial distance between drive hole centres | 4(0.156) ±0.1(0.004) | |
| D ₀ | Drive hole diameter | 1.5(0.059) +0.1(0.004)-0 | |
| D ₁ | Diameter of cavity piercing | 1(0.039) +0.1(0.004)-0 | 1.5(0.059) +0.1(0.004)-0 |
| t ₁ | Embossed tape thickness | 0.3(0.012) ±0.1(0.004) | 0.4(0.016) ±0.1(0.004) |
| t ₂ | Top tape thickness | 0.1(0.004) max | |