

Micro Commercial Components Corp.

Products End of Life Notification

Issue date: Oct-12th-2009

EOL No.#:101209

Last Buy Date :N/A

Description and Purpose:

MCC has undergone a review of its core business and products, and

determined to discontinue below product:

Discontinued Devices	Possible Replacements
S1ZZ	RM2000E



Micro Commercial Components

Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311

Phone: (818) 701-4933 Fax: (818) 701-4939

S1Q THRU S₁ZZ

Features

- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates RoHS Compliant. See ordering information)
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1
- For Surface Mount Applications
- Extremely Low Thermal Resistance
- High Temp Soldering: 260°C for 10 Seconds At Terminals
- Perfect For Ballast, Television And Monitor Applications

Maximum Ratings

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- Maximum Thermal Resistance; 15°C/W Junction To Lead

MCC		Maximum	Maximum	Maximum
Part	Device	Recurrent	RMS	DC
Number	Marking	Peak Reverse	Voltage	Blocking
		Voltage	_	Voltage
S1Q	S1Q	1200V	840V	1200V
S1V	S1V	1400V	980V	1400V
S1Y	S1Y	1600V	1120V	1600V
S1Z	S1Z	1800V	1260V	1800V
S1ZZ	S1ZZ	2000V	1400V	2000V


lectrical Characteristics @ 25°C Unless Otherwise Specified


Average Forward	I _{F(AV)}	1.0A	$T_J = 75^{\circ}C$
Current Peak Forward Surge	1	30A	8.3ms, half sine
Current	I _{FSM}	307	O.SITIS, Hall Sille
Maximum			
Instantaneous			
Forward Voltage			
	V_{F}	1.10V	$I_{FM} = 1.0A;$
			$T_J = 25^{\circ}C^*$
Maximum DC			
Reverse Current At	I_R	10.0μΑ	$T_J = 25^{\circ}C$
Rated DC Blocking		500μΑ	$T_J = 125^{\circ}C$
Voltage			
Maximum Reverse			
Recovery Time			
	T_{rr}	2.5us	$I_F=0.5A, I_R=1.0A,$
			I _{rr} =0.25A
Typical Junction	С	15pF	Measured at
Capacitance			1.0MHz, V _R =4.0V

^{*}Pulse test: Pulse width 300 µsec, Duty cycle 2%

Notes: 1. High Temperature Solder Exemption Applied, see EU Directive Annex Notes 7.

1 Amp Silicon Rectifier 1200 to 2000 Volts

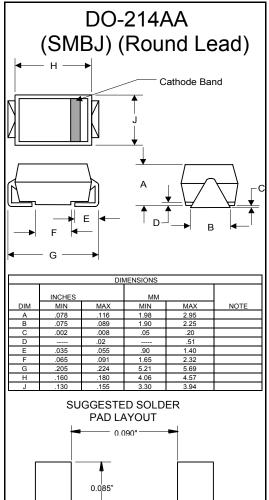





Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel3Kpcs/Reel

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes.
Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Micro Commercial Components Corp. and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp* . are not intended for use in Medical,

Aerospace or Military Applications.