

preliminary

**622Mbps
PIN Photodiode – Preamplifier Coaxial Module
with Single/Multi Mode Fiber**

OD8615B/D

3rd Issued: JUN. / 30/ 01
2nd Issued: MAY. / 9/ 00
1st Issued: JAN. / 24/ 00

Receipt

Drawing Number : JOG-00723
Revision 3
OD8615B/D
Page 1 of 6

Oki Electric Industry Co.,Ltd.

1. Description

OD8615B/D is an optical receiver module for digital transmission systems up to 622Mbps. It uses an InGaAs PIN photodiode with a low noise Pre-Amplifier. Package style is a hermetically sealed coaxial package with single/multi mode fiber pigtail.

2. Absolute Maximum Ratings

(Ta=25 °C,unless otherwise noted)

Parameter	Symbol	Ratings	Unit
Supply Voltage	V _{ss}	6.5	V
Incident Optical Power	P _o	0	dBm
Operating Temperature	T _{op}	-40 to +85	°C
Storage Temperature	T _{stg}	-40 to +85	°C

Drawing Number : JOG-00723

Revision 3

OD8615B/D

Page 2 of 6

Oki Electric Industry Co.,Ltd.

3. Optical and Electrical Characteristics

(Vss=3.3 V, Wavelength=1310 nm & Top=25°C, unless otherwise noted)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Recommended Supply Voltage	Vss		3.0	3.3	3.6	V
Wavelength	λ		1270	--	1620	nm
Low Frequency Cutoff	fc	-3 dB, Pin=-25dBm	--	--	100	kHz
Sensitivity	PRL	BER 10^{-10} , 622 Mb/s	--	-32	-30	dBm
Overload	PRH	BER 10^{-10} , 622 Mb/s	-5	--	--	dBm
Single Ended Output Impedance	Zout		40	50	60	Ω
Bandwidth	BW	-3dB, Pin=-25dBm	400	470	--	MHz
Differential Output Voltage	Vd	RL=100 Ω Pin=-5dBm	--	260	450	mV
Differential Responsivity	Rd	RL =100 Ω , Pin=-25dBm	--	6 ^{*1} 5.5 ^{*2}	--	kV/W
RMS Noise Referred to Input	In	BW=470 MHz, Pin=0mW	--	60		nA RMS
Supply Current	Iss	Pin=0mW	--	21	30	mA

*1:OD8615B,*2:OD8615D

Drawing Number : JOG-00723
Revision 3
OD8615B/D
Page 3 of 6

Ok Electric Industry Co.,Ltd.

4. Fiber Pigtail Specifications

Parameter	Specifications		Unit
Part#	OD8615B	OD8615D	
Type	SM	MM	---
Mode Field Diameter	10	50	μm
Cladding Diameter	125		μm
Jacket Diameter	900		μm
Length	1 (Min.)		m
Connector	FC/PC or SC/PC		---

5. Package

OD8615

Fiber Flange Connector
B: SM AF: Angle FC
D: MM SF: Straight SC

ex.) OD8615B-AFFC
OD8615 with SM fiber, angled flange,
and FC connector.

6. Accompanied Data

The following test data shall be packaged with each module.

- Oki part number
- Lot number
- Serial number
- Differential Responsivity

V_{ss}=3.3 V, R_L=100Ω, Pin=-25dBm, Wavelength=1310 nm

Drawing Number : JOG-00723

Revision 3


OD8615B/D

Page 4 of 6

Oki Electric Industry Co.,Ltd.


7. Package Outline Drawing

(1)OD8615B - AF

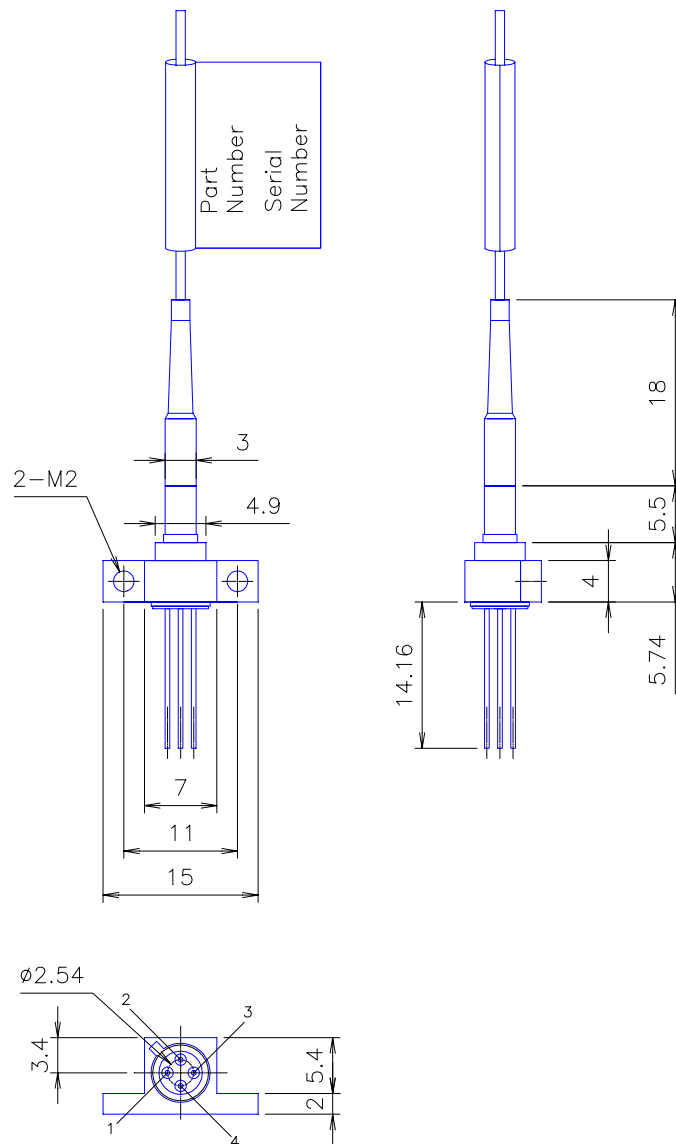

Pin Connection	
1	VOUT-
2	VDD
3	VOUT+
4	GND(case)

note 1: Unit = mm

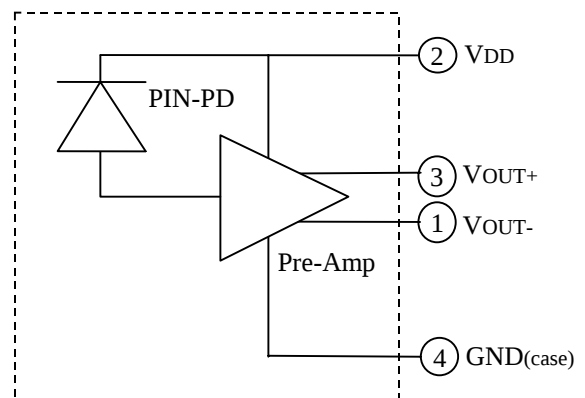



Drawing Number : JOG-00723

Revision 3

OD8615B/D


Page 5 of 6

(2)OD8615B – SF

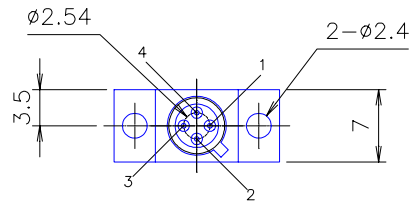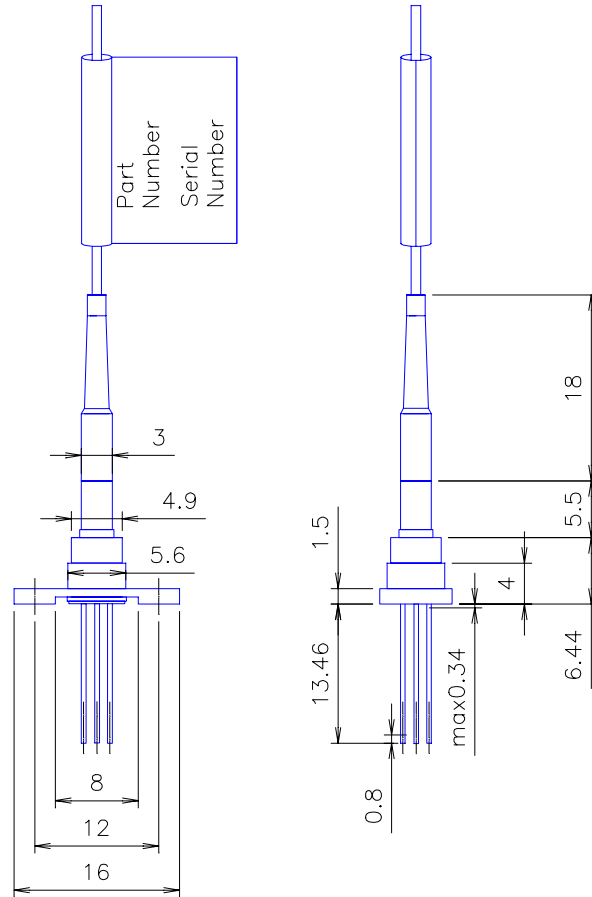

Pin Connection	
1	VOUT-
2	VDD
3	VOUT+
4	GND(case)

note 1: Unit = mm

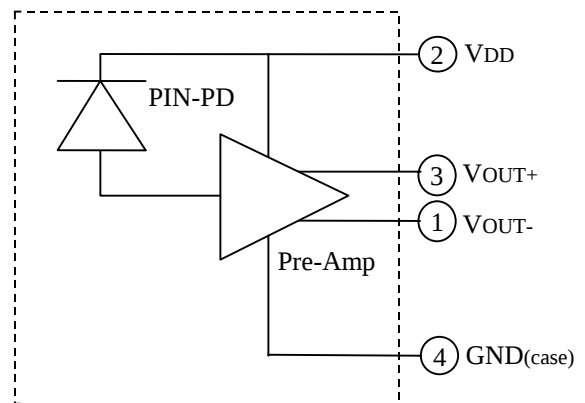

Drawing Number : JOG-00723

Revision 3

OD8615B/D

Page 6 of 6

Ok Electric Industry Co.,Ltd.