

Precision Monolithics Inc.

**FEATURES (All Devices)**

- Significant Performance Advantages over LF155, 156 and 157 Devices.
- Low Input Offset Voltage ..... 500 $\mu$ V Max
- Low Input Offset Voltage Drift ..... 2.0 $\mu$ V/ $^{\circ}$ C
- Minimum Slew Rate Guaranteed on All Models
- Temperature-Compensated Input Bias Currents
- Guaranteed Input Bias Current @ 125 $^{\circ}$ C
- Bias Current Specified WARMED UP Over Temperature
- Internal Compensation
- Low Input Noise Current ..... 0.01pA/ $\sqrt{Hz}$
- High Common-Mode Rejection Ratio ..... 100dB
- Models With MIL-STD-883 Processing Available
- 125 $^{\circ}$ C Temperature Tested DICE

**OP-15**


- 156 Speed With 155 Dissipation ..... (80mW Typ)
- Wide Bandwidth ..... 6MHz
- High Slew Rate ..... 13V/ $\mu$ s
- Fast Settling to  $\pm$ 0.1% ..... 1200ns
- Available in Die Form

**OP-16**

- Higher Slew Rate ..... 25V/ $\mu$ s
- Faster Settling to  $\pm$ 0.1% ..... 900ns
- Wider Bandwidth ..... 8MHz
- Available in Die Form

**OP-17**

- Highest Slew Rate ..... 60V/ $\mu$ s
- Fastest Settling to  $\pm$ 0.1% ..... 600ns
- Highest Gain Bandwidth Product (AvCL = 5 Min) ..... 30MHz
- Available in Die Form

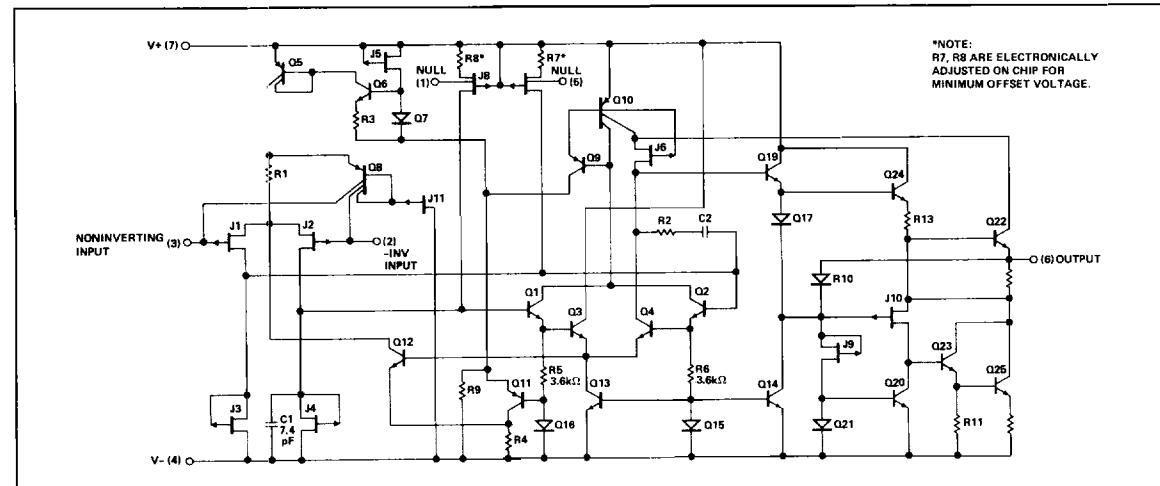**SIMPLIFIED SCHEMATIC**


ORDERING INFORMATION<sup>†</sup>

$T_A = +25^\circ\text{C}$		PACKAGE			OPERATING TEMPERATURE RANGE
$V_{OS}$ MAX (mV)	TO-99	CERDIP 8-PIN	PLASTIC 8-PIN	SO 8-PIN	
0.5	OP15AJ*	OP15AZ*	-	-	MIL
	OP16AJ*	-	-	-	
	OP17AJ*	OP17AZ*	-	-	
0.5	OP15EJ	OP15EZ	-	-	COM
	OP16EJ	OP16EZ	-	-	
	OP17EJ	OP17EZ	-	-	
1.0	OP15BJ/883	OP15BZ/883	-	-	MIL
	OP16BJ/883	OP16BZ/883	-	-	
	OP17BJ*	OP17BZ	-	-	
1.0	OP15FJ	OP15FZ	OP15FP	-	COM
	OP16FJ	OP16FZ	OP16FP	-	
	-	-	OP17FP	-	
3.0	-	OP17CZ/883	-	-	MIL
	OP15GJ	OP15GZ	OP15GP	OP15GS	
	OP16GJ	OP16GZ	OP16GP	OP16GS	XIND
	OP17GJ	OP17GZ	OP17GP	OP17GS	


\* For devices processed in total compliance to MIL-STD-883, add /883 after part number. Consult factory for 883 data sheet.

† Burn-in is available on commercial and industrial temperature range parts in CerDIP, plastic DIP, and TO-can packages. For ordering information, see 1990/91 Data Book, Section 2.

## PIN CONNECTIONS

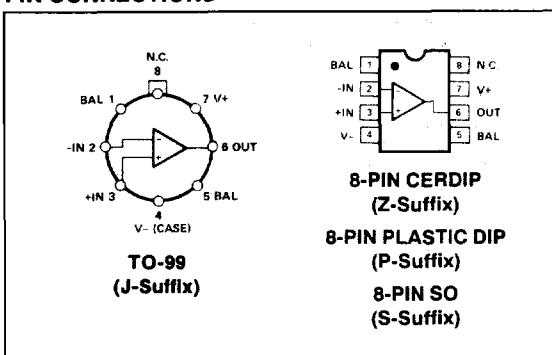

## BURN-IN CIRCUIT

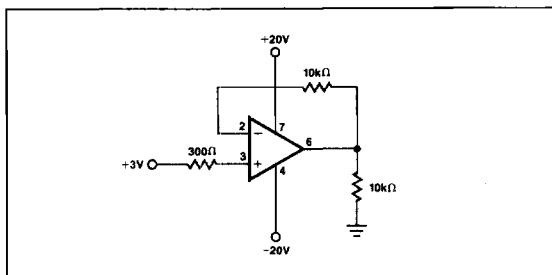

## ABSOLUTE MAXIMUM RATINGS (Note 1)

## Supply Voltage

All Devices Except C, G (Packaged) & GR Grades	±22V
C, G (Packaged) & GR Grades	±18V

## Operating Temperature

A, B, & C Grades	-55°C to +125°C
E & F Grades	0°C to +70°C
G Grade	-40°C to +85°C

Maximum Junction Temperature ..... +150°C

DICE Junction Temperature ( $T_J$ ) ..... -65°C to +150°C

## Differential Input Voltage

All Devices Except C, G (Packaged) & GR Grades	±40V
C, G (Packaged) & GR Grades	±30V

## Input Voltage (Note 2)

All Devices Except C, G (Packaged) & GR Grades	±20V
C, G (Packaged) & GR Grades	±16V

## Input Voltage

OP-15A, OP-15B, OP-15E, OP-15F	±20V
OP-15G	±16V

OP-16A, OP-16B, OP-16E, OP-16F	±20V
OP-16C, OP-16G	±16V

OP-17A, OP-17B, OP-17E, OP-17F	±20V
OP-17C, OP-17G	±16V

Output Short-Circuit Duration ..... Indefinite

Storage Temperature Range ..... -65°C to +150°C

Lead Temperature Range (Soldering, 60 sec) ..... +300°C

PACKAGE TYPE	$\Theta_{JA}$ (Note 3)	$\Theta_{JC}$	UNITS
TO-99 (J)	150	18	°C/W
8-Pin Hermetic DIP (Z)	148	16	°C/W
8-Pin Plastic DIP (P)	103	43	°C/W
8-Pin SO (S)	158	43	°C/W

## NOTES:

1. Absolute maximum ratings apply to both DICE and packaged parts, unless otherwise noted.
2. Unless otherwise specified the absolute maximum negative input voltage is equal to the negative power-supply voltage.
3.  $\Theta_{JA}$  is specified for worst case mounting conditions, i.e.,  $\Theta_{JA}$  is specified for device in socket for TO, CerDIP and P-DIP packages;  $\Theta_{JA}$  is specified for device soldered to printed circuit board for SO package.

**ELECTRICAL CHARACTERISTICS** at  $V_S = \pm 15V$ ,  $T_A = 25^\circ C$ , unless otherwise noted.

PARAMETER	SYMBOL	CONDITIONS	OP-15A/E			OP-15B/F			OP-15G			
			OP-16A/E			OP-16B/F			OP-16C/G			
			OP-17A/E			OP-17B/F			OP-17C/G			
Input Offset Voltage	$V_{OS}$	$R_S = 50\Omega$	—	0.2	0.5	—	0.4	1.0	—	0.5	3.0	mV
Input Offset Current	$I_{OS}$	$T_j = 25^\circ C$ (Note 1) Device Operating OP-15	—	3	10	—	6	20	—	12	50	
		$T_j = 25^\circ C$ (Note 1) Device Operating OP-16/OP-17	—	5	22	—	10	40	—	20	100	pA
Input Bias Current	$I_B$	$T_j = 25^\circ C$ (Note 1) Device Operating OP-15	—	$\pm 15$	$\pm 50$	—	$\pm 30$	$\pm 100$	—	$\pm 60$	$\pm 200$	
		$T_j = 25^\circ C$ (Note 1) Device Operating OP-16/OP-17	—	$\pm 18$	$\pm 110$	—	$\pm 40$	$\pm 200$	—	$\pm 80$	$\pm 400$	pA
Input Resistance	$R_{IN}$		—	$10^{12}$	—	—	$10^{12}$	—	—	$10^{12}$	—	$\Omega$
Large-Signal Voltage Gain	$A_{VO}$	$R_L \geq 2k\Omega$ $V_O = \pm 10V$	100	240	—	75	220	—	50	200	—	V/mV
Output Voltage Swing	$V_O$	$R_L = 10k\Omega$ $R_L = 2k\Omega$	$\pm 12$	$\pm 13$	—	$\pm 12$	$\pm 13$	—	$\pm 12$	$\pm 13$	—	V
Supply Current	$I_{SY}$	OP-15 OP-16/OP-17	—	2.7	4.0	—	2.7	4.0	—	2.8	5.0	mA
Slew Rate	SR	$A_{VCL} = +1$ (Note 3) OP-15	10	13	—	7.5	11	—	5	9	—	
		OP-16 18	18	25	—	12	21	—	9	17	—	V/ $\mu$ s
		$A_{VCL} = +5$ (Note 3) OP-17	45	60	—	35	50	—	25	40	—	
Gain Bandwidth Product	GBW	(Note 3)	OP-15	4.0	6.0	—	3.5	5.7	—	3.0	5.4	
		OP-16	6.0	8.0	—	5.5	7.6	—	5.0	7.2	—	MHz
		OP-17	20	30	—	15	28	—	11	26	—	
Closed-Loop Bandwidth	CLBW	$A_{VCL} = +1$ OP-15	—	14	—	—	13	—	—	12	—	
		OP-16 $A_{VCL} = +5$ OP-17	—	19	—	—	18	—	—	17	—	MHz
Settling Time	$t_s$	to 0.01%	—	4.5	—	—	4.5	—	—	4.7	—	
		to 0.05% (Note 2)	OP-15	—	1.5	—	—	1.5	—	—	1.6	—
		to 0.10%	—	1.2	—	—	1.2	—	—	1.3	—	
		to 0.01%	—	3.8	—	—	3.8	—	—	4.0	—	
		to 0.05% (Note 2)	OP-16	—	1.2	—	—	1.2	—	—	1.3	—
		to 0.10%	—	0.9	—	—	0.9	—	—	1.0	—	$\mu$ s
		to 0.01%	—	1.5	—	—	1.5	—	—	1.6	—	
		to 0.05% (Note 4)	OP-17	—	0.7	—	—	0.7	—	—	0.8	—
		to 0.10%	—	0.6	—	—	0.6	—	—	0.7	—	
Input Voltage Range	IVR		$\pm 10.5$	—	—	$\pm 10.5$	—	—	$\pm 10.3$	—	—	V
Common-Mode Rejection Ratio	CMRR	$V_{CM} = \pm 10.5V$	86	100	—	86	100	—	—	—	—	
		$V_{CM} = \pm 10.3V$	—	—	—	—	—	—	82	96	—	dB
Power Supply Rejection Ratio	PSRR	$V_S = \pm 10V$ to $\pm 18V$	—	10	51	—	10	51	—	—	—	$\mu$ V/V
		$V_S = \pm 10V$ to $\pm 15V$	—	—	—	—	—	—	—	10	80	
Input Noise Voltage Density	$e_n$	$f_O = 100Hz$	—	20	—	—	20	—	—	20	—	$nV/\sqrt{Hz}$
		$f_O = 1000Hz$	—	15	—	—	15	—	—	15	—	
Input Noise Current Density	$i_n$	$f_O = 100Hz$	—	0.01	—	—	0.01	—	—	0.01	—	$pA/\sqrt{Hz}$
		$f_O = 1000Hz$	—	0.01	—	—	0.01	—	—	0.01	—	
Input Capacitance	$C_{IN}$		—	3	—	—	3	—	—	3	—	PF

**NOTES:**

1. Input bias current is specified for two different conditions. The  $T_j = 25^\circ C$  specification is with the junction at ambient temperature; the Device Operating specification is with the device operating in a warmed-up condition at  $25^\circ C$  ambient. The warmed-up bias current value is correlated to the junction temperature value via the curves of  $I_B$  vs  $T_j$  and  $I_B$  vs  $T_A$ . PMI has a bias current compensation circuit which gives improved bias current over the standard JFET input op amps.  $I_B$  and  $I_{OS}$  are measured at  $V_{CM} = 0$ .
2. Settling time is defined here for a unity gain inverter connection using  $2k\Omega$  resistors. It is the time required for the error voltage (the voltage at the

inverting input pin on the amplifier) to settle to within a specified percent of its final value from the time a 10V step input is applied to the inverter. See settling time test circuit.

3. Sample tested.
4. Settling time is defined here for a  $A_V = -5$  connection with  $R_F = 2k\Omega$ . It is the time required for the error voltage (the voltage at the inverting input pin on the amplifier) to settle to within 0.01% of its final value from the time a 2V step input is applied to the inverter. See settling time test circuit.

**ELECTRICAL CHARACTERISTICS** at  $V_S = \pm 15V$ ,  $-55^\circ C \leq T_A \leq 125^\circ C$ , unless otherwise noted.

PARAMETER	SYMBOL	CONDITIONS	OP-15A OP-16A OP-17A			OP-15B OP-16B OP-17B			OP-16C OP-17C			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
Input Offset Voltage	$V_{OS}$	$R_S = 50\Omega$	—	0.4	0.9	—	0.7	2.0	—	0.9	4.5	mV
Average Input Offset Voltage Drift		(Note 2)										
Without External Trim	$TCV_{OS}$		—	2	5	—	3	10	—	4	15	$\mu V/^{\circ}C$
With External Trim	$TCV_{OSn}$	$R_P = 100k\Omega$	—	2	—	—	3	—	—	4	—	
input Offset Current (Note 1)	$I_{OS}$	$T_J = 125^\circ C$ $T_A = 125^\circ C$ Device Operating	—	0.6	4.0	—	0.8	6.0	—	1.0	9.0	nA
		$T_J = 125^\circ C$ $T_A = 125^\circ C$ Device Operating	—	0.8	7.0	—	1.2	11	—	1.5	17	
		$T_J = 125^\circ C$ $T_A = 125^\circ C$ OP-16/OP-17	—	0.6	4.0	—	0.8	6.0	—	1.0	9.0	
		Device Operating	—	1.0	8.5	—	1.3	14.5	—	1.7	22	
Input Bias Current (Note 1)	$I_B$	$T_J = 125^\circ C$ $T_A = 125^\circ C$ OP-15	—	$\pm 1.2$	$\pm 5.0$	—	$\pm 1.5$	$\pm 7.5$	—	$\pm 1.8$	$\pm 10$	nA
		Device Operating	—	$\pm 1.7$	$\pm 9.0$	—	$\pm 2.2$	$\pm 14$	—	$\pm 2.7$	$\pm 19$	
		$T_J = 125^\circ C$ $T_A = 125^\circ C$ OP-16/OP-17	—	$\pm 1.2$	$\pm 5.0$	—	$\pm 1.5$	$\pm 7.5$	—	$\pm 1.8$	$\pm 10$	
		Device Operating	—	$\pm 2.0$	$\pm 11$	—	$\pm 2.5$	$\pm 18$	—	$\pm 3.0$	$\pm 25$	
Input Voltage Range	IVR		± 10.4	—	—	± 10.4	—	—	± 10.25	—	—	V
Common-Mode Rejection Ratio	CMRR	$V_{CM} = \pm 10.4V$ $V_{CM} = \pm 10.25V$	85	97	—	85	97	—	—	—	—	dB
Power Supply Rejection Ratio	PSRR	$V_S = \pm 10V$ to $\pm 18V$ $V_S = \pm 10V$ to $\pm 15V$	—	15	57	—	15	57	—	—	—	$\mu V/V$
Large-Signal Voltage Gain	$A_{VO}$	$R_L \geq 2k\Omega$ $V_O = \pm 10V$	35	120	—	30	110	—	25	100	—	V/mV
Output Voltage Swing	$V_O$	$R_L \geq 10k\Omega$	± 12	± 13	—	± 12	± 13	—	± 12	± 13	—	V

**NOTES:**

1. Input bias current is specified for two different conditions. The  $T_J = 25^\circ C$  specification is with the junction at ambient temperature; the Device Operating specification is with the device operating in a warmed-up condition at  $25^\circ C$  ambient. The warmed-up bias current value is correlated to the junction temperature value via the curves of  $I_B$  vs  $T_J$  and  $I_B$  vs  $T_A$ . PMI has a bias current compensation circuit which gives improved bias current over the standard JFET input op amps.  $I_B$  and  $I_{OS}$  are measured at  $V_{CM} = 0$ .
2. Sample tested.

**ELECTRICAL CHARACTERISTICS** at  $V_S = \pm 15V$ ,  $0^\circ C \leq T_A \leq 70^\circ C$  for E and F,  $-40 \leq T_A \leq +85^\circ C$  for G grade, unless otherwise noted.


PARAMETER	SYMBOL	CONDITIONS	OP-15E			OP-15F			OP-15G			
			OP-16E			OP-16F			OP-16G			
			OP-17E			OP-17F			OP-17G			
MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	UNITS
Input Offset Voltage	$V_{OS}$	$R_S = 50\Omega$	—	0.3	0.75	—	0.55	1.5	—	0.7	3.8	mV
Average Input Offset Voltage Drift												(Note 2)
Without External Trim	$TCV_{OS}$		—	2	5	—	3	10	—	4	30	$\mu V/^\circ C$
With External Trim	$TCV_{OSn}$	$R_p = 100k\Omega$	—	2	—	—	3	—	—	4	—	
Input Offset Current (Note 1)	$I_{OS}$	$T_j = 70^\circ C$ $T_A = 70^\circ C$ Device Operating	OP-15	—	0.04	0.30	—	0.06	0.45	—	0.08	0.65
		$T_j = 70^\circ C$ $T_A = 70^\circ C$ Device Operating	OP-16/OP-17	—	0.06	0.55	—	0.08	0.80	—	0.10	1.2
Input Bias Current (Note 1)	$I_B$	$T_j = 70^\circ C$ $T_A = 70^\circ C$ Device Operating	OP-15	—	0.04	0.30	—	0.06	0.45	—	0.08	0.65
		$T_j = 70^\circ C$ $T_A = 70^\circ C$ Device Operating	OP-16/OP-17	—	0.07	0.70	—	0.10	1.1	—	0.15	1.7
Input Voltage Range	IVR			$\pm 10.4$	—	—	$\pm 10.4$	—	—	$\pm 10.25$	—	—
Common-Mode Rejection Ratio	CMRR	$V_{CM} = \pm 10.4V$ $V_{CM} = \pm 10.25V$		85	98	—	85	98	—	—	—	dB
Power Supply Rejection Ratio	PSRR	$V_S = \pm 10V$ to $\pm 18V$ $V_S = \pm 10V$ to $\pm 15V$		—	13	57	—	13	57	—	—	—
Large-Signal Voltage Gain	$A_{VO}$	$R_L \geq 2k\Omega$ $V_O = \pm 10V$		65	200	—	50	180	—	35	160	V/mV
Output Voltage Swing	$V_O$	$R_L \geq 10k\Omega$		$\pm 12$	$\pm 13$	—	$\pm 12$	$\pm 13$	—	$\pm 12$	$\pm 13$	v

**NOTES:**

1. Input bias current is specified for two different conditions. The  $T_j = 25^\circ C$  specification is with the junction at ambient temperature; the Device Operating specification is with the device operating in a warmed-up condition at  $25^\circ C$  ambient. The warmed-up bias current value is correlated to the junction temperature value via the curves of  $I_B$  vs  $T_j$  and  $I_B$  vs  $T_A$ . PMI has a bias current compensation circuit which gives improved bias current over the standard JFET input op amps.  $I_B$  and  $I_{OS}$  are measured at  $V_{CM} = 0$ .
2. Sample tested.


## DICE CHARACTERISTICS (125°C TESTED DICE AVAILABLE)

OP-15




DIE SIZE 0.068 × 0.056 inch, 3808 sq. mils  
(1.73 × 1.42mm, 2.46 sq. mm)

OP-16



DIE SIZE 0.068 × 0.056 inch, 3808 sq. mils  
(1.73 × 1.42mm, 2.46 sq. mm)

OP-17



DIE SIZE 0.068 × 0.056 inch, 3808 sq. mils  
(1.73 × 1.42mm, 2.46 sq. mm)

1. BALANCE
2. INVERTING INPUT
3. NONINVERTING INPUT
4. V-
5. BALANCE
6. OUTPUT
7. V+

1. BALANCE
2. INVERTING INPUT
3. NONINVERTING INPUT
4. V-
5. BALANCE
6. OUTPUT
7. V+

1. BALANCE
2. INVERTING INPUT
3. NONINVERTING INPUT
4. V-
5. BALANCE
6. OUTPUT
7. V+

For additional DICE ordering information, refer to 1990/91 Data Book, Section 2.

**WAFER TEST LIMITS** at  $V_S = \pm 15V$ ,  $T_A = 25^\circ C$  for OP-15/16/17N, OP-15/16/17G and OP-15/16/17GR devices;  $T_A = 125^\circ C$  for OP-15/16/17NT and OP-15/16/17GT devices, unless otherwise noted.

PARAMETER	SYMBOL	CONDITIONS	OP-15NT	OP-15N	OP-15GT	OP-15G	OP-15GR	UNITS
			OP-16NT	OP-16N	OP-16GT	OP-16G	OP-16GR	
Input Offset Voltage	$V_{OS}$	$R_S = 50\Omega$	0.9	0.5	2.0	1.0	3.0	mV MAX
Large-Signal Voltage Gain	$A_{VO}$	$V_O = \pm 10V$ $R_L = 2k\Omega$	35	100	30	75	50	V/mV MIN
Input Voltage Range	IVR		$\pm 10.4$	$\pm 10.5$	$\pm 10.4$	$\pm 10.5$	$\pm 10.3$	V MIN
Common-Mode Rejection Ratio	CMRR	$V_{CM} = \pm IVR$	85	86	85	86	82	dB MIN
Power Supply Rejection Ratio	PSRR	$V_S = \pm 10V$ to $\pm 20V$ $V_S = \pm 10V$ to $\pm 15V$	57	51	57	51	—	$\mu V/V$ MAX
Output Voltage Swing	$V_O$	$R_L = 10k\Omega$ $R_L = 2k\Omega$	$\pm 12$	$\pm 12$	$\pm 12$	$\pm 12$	$\pm 12$	V MIN
Supply Current	$I_{SV}$	OP-15 OP-16, OP-17	—	4	—	4	5	mA MAX
Input Bias Current	$I_B$	OP-15 OP-16, OP-17	$\pm 9$ $\pm 11$	—	$\pm 14$ $\pm 18$	—	—	nA MAX
Input Offset Current	$I_{OS}$	OP-15 OP-16, OP-17	7.0 8.5	—	11.0 14.5	—	—	nA MAX

**NOTES:**

For 25°C characteristics of OP-15/16/17NT and OP-15/16/17GT, see OP-15/16/17N and OP-15/16/17G characteristics, respectively.

Electrical tests are performed at wafer probe to the limits shown. Due to variations in assembly methods and normal yield loss, yield after packaging is not guaranteed for standard product dice. Consult factory to negotiate specifications based on dice lot qualification through sample lot assembly and testing.


**TYPICAL ELECTRICAL CHARACTERISTICS** at  $V_S = \pm 15V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.

PARAMETER	SYMBOL	CONDITIONS	OP-15NT	OP-15N	OP-15GT	OP-15G	OP-15GR	
			OP-16NT	OP-16N	OP-16GT	OP-16G	OP-16GR	
		TYPICAL	TYPICAL	TYPICAL	TYPICAL	TYPICAL	TYPICAL	UNITS
Average Input Offset Drift Unnullied	$TCV_{OS}$		2	2	3	3	4	$\mu V^\circ C$
Average Input Offset Drift Nullied	$TCV_{OSn}$	$R_P = 100k\Omega$	2	2	3	3	4	$\mu V^\circ C$
Input Offset Current	$I_{OS}$		3	3	3	3	3	pA
Input Bias Current	$I_B$		$\pm 15$	pA				
Slew Rate	SR	$A_{VCL} = +1$	OP-15	13	13	11	11	9
		OP-16	25	25	21	21	17	$V/\mu s$
		OP-17	60	60	50	50	40	
		to 0.01%	4.5	4.5	4.5	4.5	4.7	
		to 0.05%	OP-15	1.5	1.5	1.5	1.5	1.6
		to 0.10%	1.2	1.2	1.2	1.2	1.3	
Settling Time (see settling time test circuits)	$t_S$	to 0.01%	3.8	3.8	3.8	3.8	4.0	
		to 0.05%	OP-16	1.2	1.2	1.2	1.2	1.3
		to 0.10%	0.9	0.9	0.9	0.9	1.0	$\mu s$
		to 0.01%	1.5	1.5	1.5	1.5	1.6	
		to 0.05%	OP-17	0.7	0.7	0.7	0.7	0.8
		to 0.10%	0.6	0.6	0.6	0.6	0.7	
Gain Bandwidth Product	GBW	OP-15	6.0	6.0	5.7	5.7	5.4	
		OP-16	8.0	8.0	7.6	7.6	7.2	$MHz$
		OP-17	30	30	28	28	26	
Closed-Loop Bandwidth	CLBW	$A_{VCL} = +1$	OP-15	14	14	13	13	12
		OP-16	19	19	18	18	17	$MHz$
		OP-17	11	11	10	10	9	
Input Noise Voltage Density	$e_n$	$f = 100Hz$	20	20	20	20	20	$nV/\sqrt{Hz}$
		$f = 1000Hz$	15	15	15	15	15	
Input Noise Current Density	$i_n$	$f = 100Hz$	0.01	0.01	0.01	0.01	0.01	$pA/\sqrt{Hz}$
		$f = 1000Hz$	0.01	0.01	0.01	0.01	0.01	
Input Capacitance	$C_{IN}$		3	3	3	3	3	pF


**NOTES:**

For  $25^\circ C$  characteristics of OP-15/16/17NT and OP-15/16/17GT, see OP-15/16/17N and OP-15/16/17G characteristics, respectively.



## TYPICAL PERFORMANCE CHARACTERISTICS (OP-15/OP-16/OP-17)

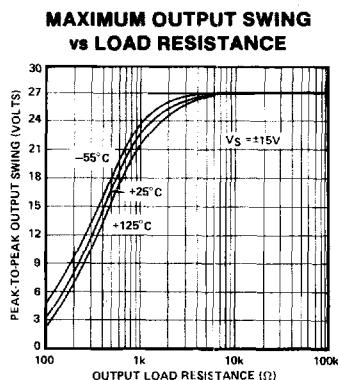


**COMMON-MODE INPUT VOLTAGE RANGE vs SUPPLY VOLTAGE**





**VOLTAGE NOISE vs SOURCE RESISTANCE**

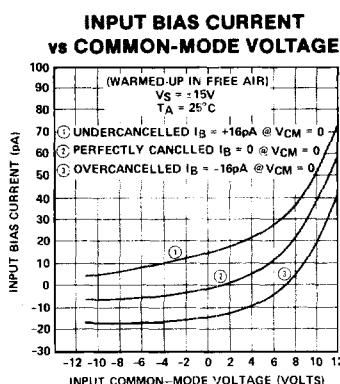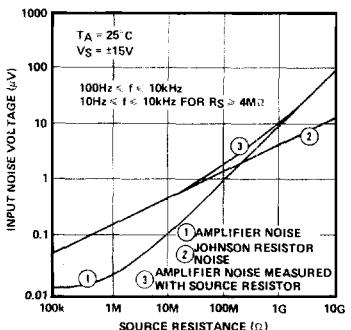


**OPEN-LOOP VOLTAGE GAIN vs SUPPLY VOLTAGE**




**OUTPUT VOLTAGE SWING vs SUPPLY VOLTAGE**

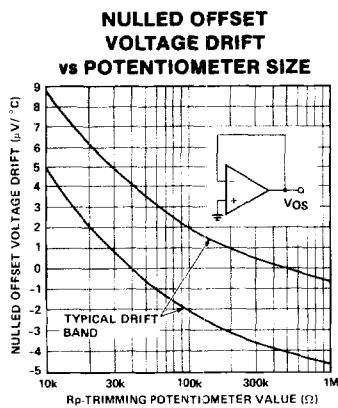







**OFFSET VOLTAGE DRIFT vs TEMPERATURE OF REPRESENTATIVE UNITS**





**INPUT BIAS CURRENT vs AMBIENT TEMPERATURE (UNITS ARE WARMED-UP IN FREE AIR)**

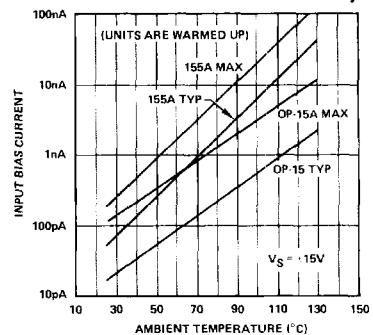


## TYPICAL PERFORMANCE CHARACTERISTICS (OP-15/OP-16/OP-17)

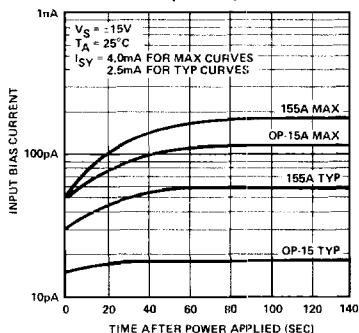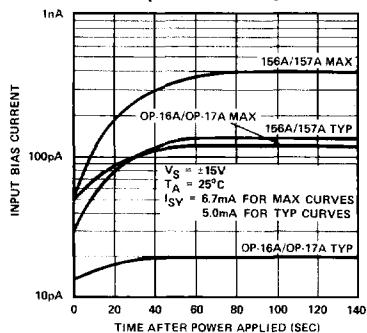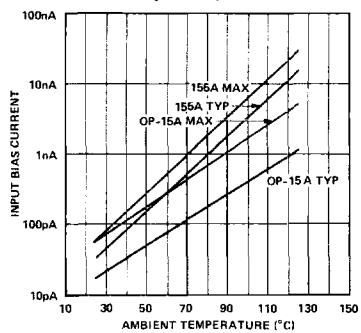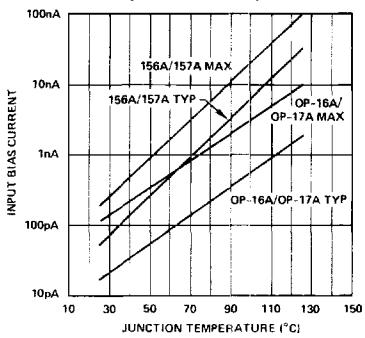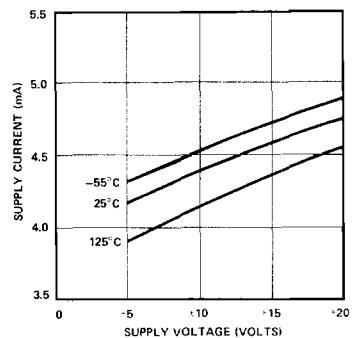BIAS CURRENT vs TIME  
IN FREE AIR  
(OP-15)BIAS CURRENT vs TIME  
IN FREE AIR  
(OP-16/OP-17)INPUT BIAS CURRENT vs  
AMBIENT TEMPERATURE (UNITS  
ARE WARMED-UP IN FREE AIR)  
(OP-15)INPUT BIAS CURRENT vs  
AMBIENT TEMPERATURE (UNITS  
ARE WARMED-UP IN FREE AIR)  
(OP-16/OP-17)SUPPLY CURRENT  
vs SUPPLY VOLTAGE  
(OP-15)SUPPLY CURRENT  
vs SUPPLY VOLTAGE  
(OP-16/OP-17)










## TYPICAL PERFORMANCE CHARACTERISTICS (OP-15)

LARGE-SIGNAL  
TRANSIENT RESPONSESMALL-SIGNAL  
TRANSIENT RESPONSE


SETTLING TIME







## TYPICAL PERFORMANCE CHARACTERISTICS (OP-15)

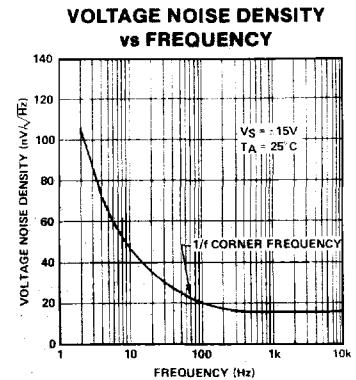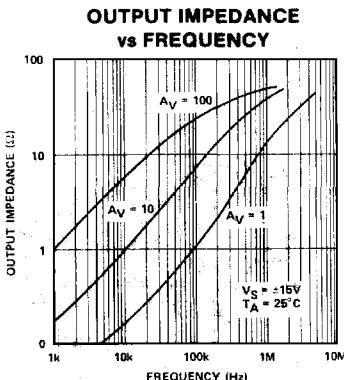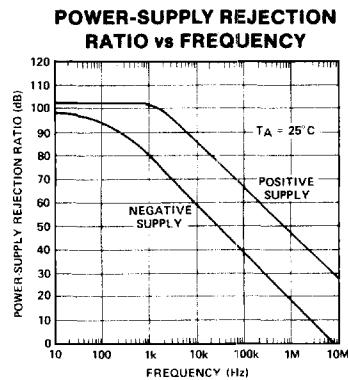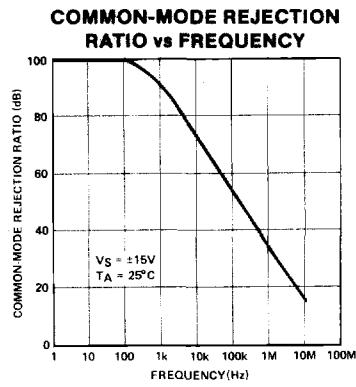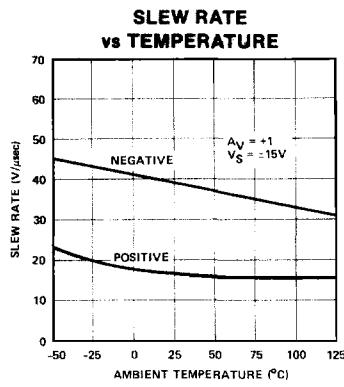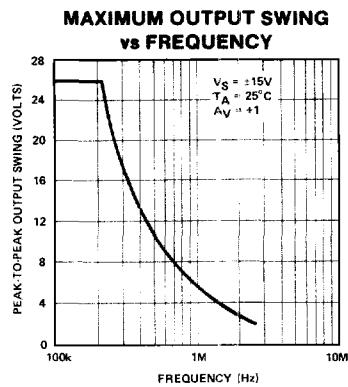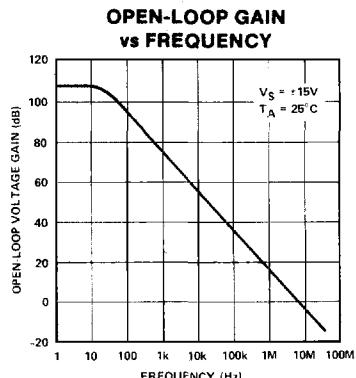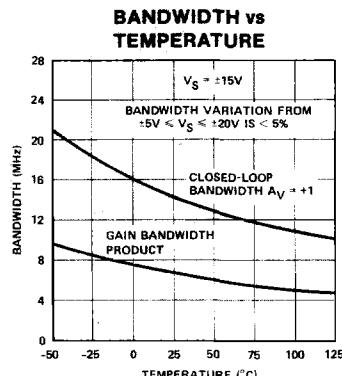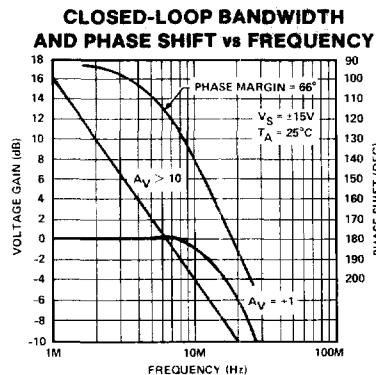




## TYPICAL PERFORMANCE CHARACTERISTICS (OP-16)

LARGE-SIGNAL  
TRANSIENT RESPONSESMALL-SIGNAL  
TRANSIENT RESPONSE




SETTLING TIME

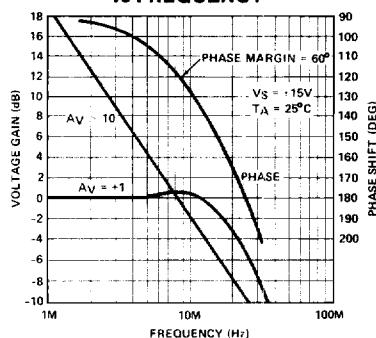CLOSED-LOOP BANDWIDTH  
AND PHASE SHIFT  
vs FREQUENCYBANDWIDTH vs  
TEMPERATUREOPEN-LOOP GAIN  
vs FREQUENCY




OPERATIONAL AMPLIFIERS/BUFFERS

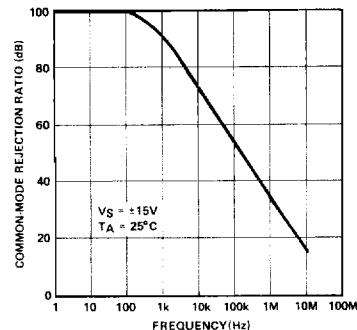MAXIMUM OUTPUT SWING  
vs FREQUENCYSLEW RATE  
vs TEMPERATURECOMMON-MODE REJECTION  
RATIO vs FREQUENCY




## TYPICAL PERFORMANCE CHARACTERISTICS (OP-16)

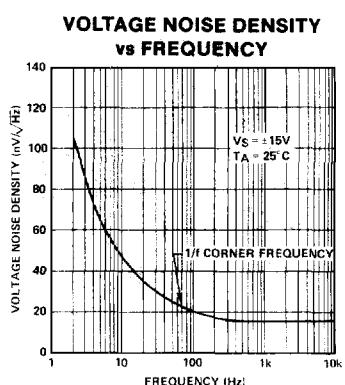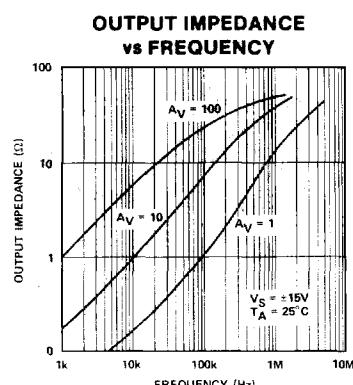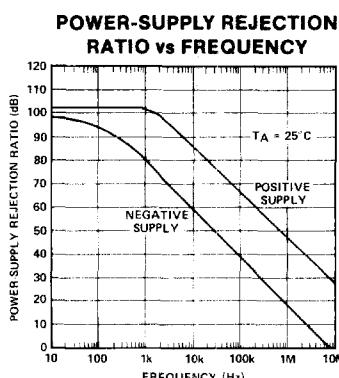







## TYPICAL PERFORMANCE CHARACTERISTICS (OP-17)

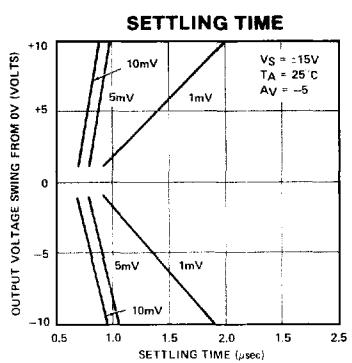

## CLOSED-LOOP BANDWIDTH AND PHASE SHIFT vs FREQUENCY

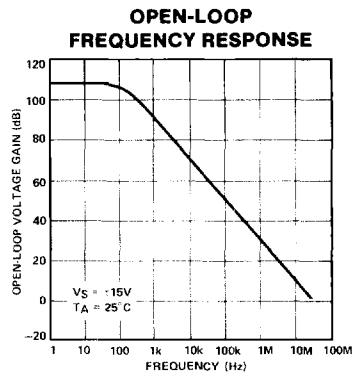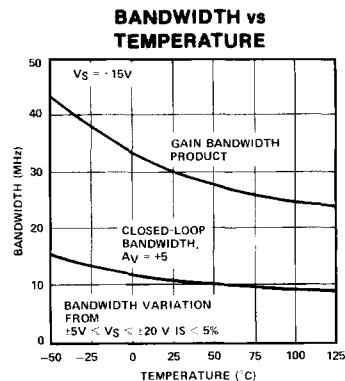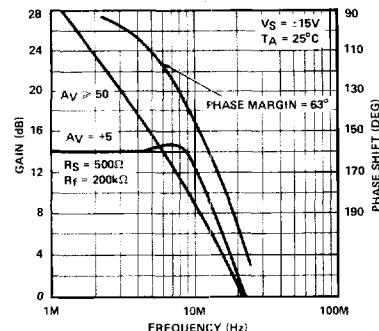


## TYPICAL PERFORMANCE CHARACTERISTICS (OP-17)

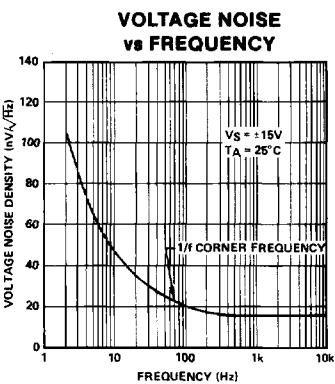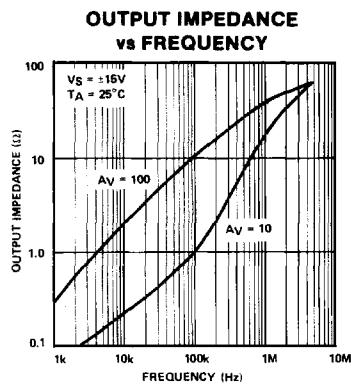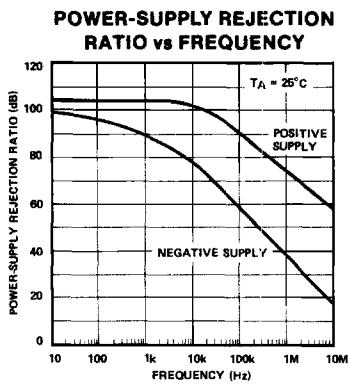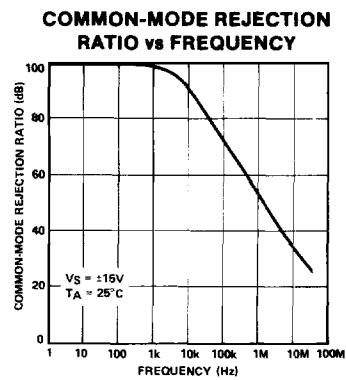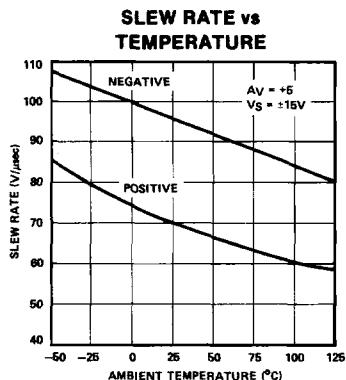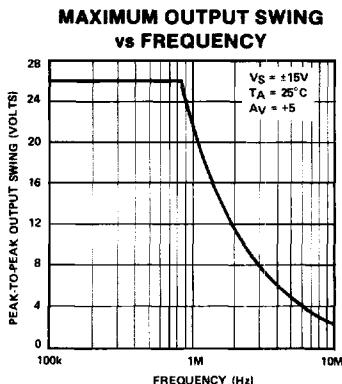


## BASIC CONNECTIONS


## INPUT OFFSET VOLTAGE NULLING

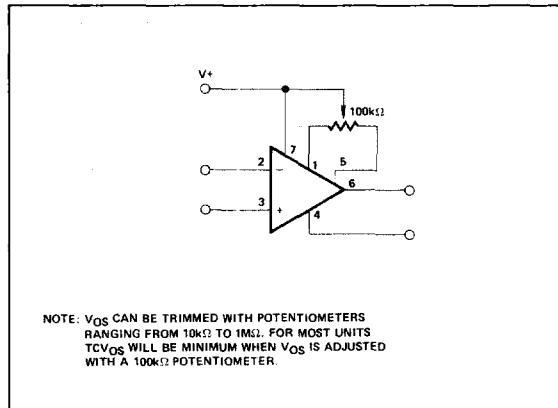

## SETTLING-TIME TEST CIRCUIT — OP-15/OP-16

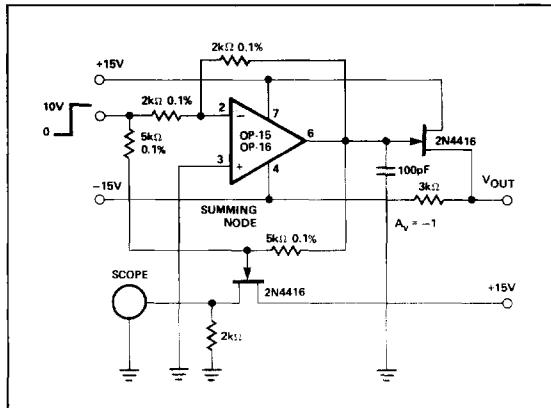


## SETTLING-TIME TEST CIRCUIT — OP-17

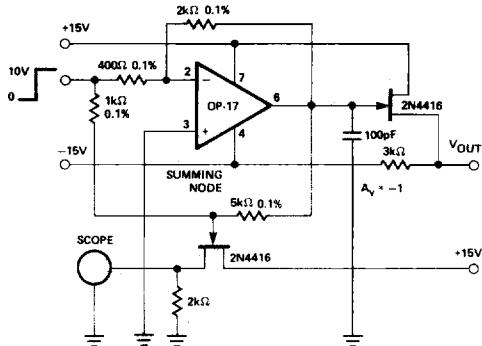

## TYPICAL APPLICATIONS

## CURRENT-TO-VOLTAGE AMPLIFIER OUTPUT

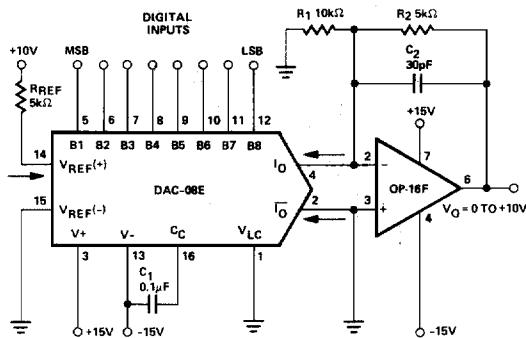

## APPLICATIONS INFORMATION

## DYNAMIC OPERATING CONSIDERATIONS

As with most amplifiers, care should be taken with lead dress, component placement, and supply decoupling in order to ensure stability. For example, resistors from the output to an input should be placed with the body close to the input to minimize "pick-up" and maximize the frequency of the feedback pole by minimizing the capacitance from the input to ground.

A feedback pole is created when the feedback around any amplifier is resistive. The parallel resistance and capacitance

from the input of the device (usually the inverting input) to AC ground set the frequency of the pole. In many instances the frequency of this pole is much greater than the expected 3dB frequency of the closed-loop gain and consequently there is negligible effect on stability margin. However, if the feedback pole is less than approximately six times the expected 3dB frequency, a lead capacitor should be placed from the output to the negative input of the op amp. The value of the added capacitor should be such that the RC time-constant of this capacitor and the resistance it parallels is greater than, or equal to, the original feedback pole time constant.