


CHP1X -- SPECIAL SERIES

1/2 WATT PACKAGE



METAL GLAZE™ GENERAL PURPOSE SURFACE MOUNT POWER RESISTOR

- 1 Watt in a 1/2 watt package (2010 footprint)
- 0.1 ohm to 10K ohm
- Outstanding surge capacity
- 150°C maximum operating temperature

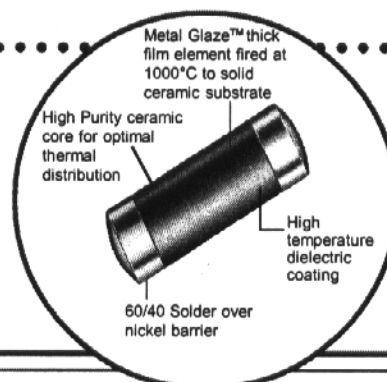

CHP SPECIFICATIONS:

Size Code ¹	Industry Footprint	IRC Type	Maximum Power Rating	Working Voltage ²	Maximum Voltage	Resistance Range (ohms) ³	Tolerance (±%) ³	TCR (ppm/°C) ³	Product Category
D	2010	CHP 1X	1W @ 70°C	300	600	0.1 to 0.99 1.0 to 10K	1, 2, 5 1, 2, 5	100 50, 100	Low Range Standard

Not to exceed $\sqrt{P \times R}$ ³Consult factory for tighter TCR, tolerance, or resistance values.

CHP PERFORMANCE CHARACTERISTICS:

Characteristics	Maximum Change	Test Method
Temperature Coefficient	As specified	MIL-R-55342E Par 4.7.9 (-55°C +125°C)
Thermal Shock	±0.5% +0.01 ohm	MIL-R-55342E Par 4.7.3 (65°C +150°C, 5 cycles)
Low Temperature Operation	±0.25% +0.01 ohm	MIL-R-55342E Par 4.7.4 (65°C @ working voltage)
Short Time Overload	±0.5% +0.01 ohm ±1% for R>100K ohm	MIL-R-55342E Par 4.7.5 2.5 x $\sqrt{P \times R}$ for 5 seconds
High Temperature Exposure	±0.5% +0.01 ohm	MIL-R-55342E Par 4.7.6 (+150°C for 100 hours)
Resistance to Bonding Exposure	±0.25% 0.01 ohm	MIL-R-55342E Par 4.7.7 (Reflow soldered to board at 260°C for 10 seconds)
Solderability	95% minimum coverage	MIL-STD-202, Method 208 (245°C for 5 seconds)
Moisture Resistance	±0.5% +0.01 ohm	MIL-R-55342E Par 4.7.8 (10 cycles, total 240 hours)
Life Test	±0.3% +0.01 ohm	MIL-R-55342E Par 4.7.10 (2000 hour at 70°C intermittent)
Terminal Adhesion Strength	±1% +0.01 ohm no mechanical damage	1200 gram push from underside of mounted chip for 60 seconds
Resistance to Board Bending	±1% + 0.01 ohm no mechanical damage	Chip mounted in center of 90mm long board, deflected 5mm so as to exert pull on chip contacts for 10 seconds

General Note





IRC reserves the right to make changes in product specification without notice or liability. All information is subject to IRC's own data and is considered accurate at time of going to print.

WIREWOUND AND FILM TECHNOLOGIES DIVISION

736 Greenway Road • Boone, North Carolina 28607-1860 • Tel: 828-264-8861 • Fax: 828-264-8866 • www.irctt.com



A subsidiary of
TT electronics plc
Issue Preliminary
0701

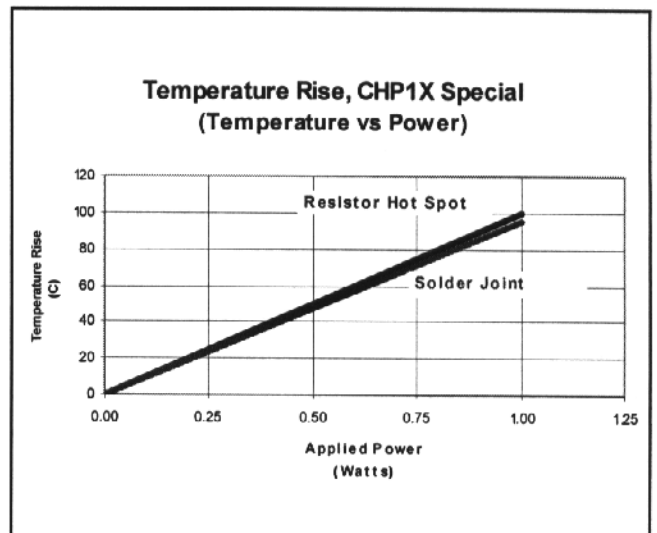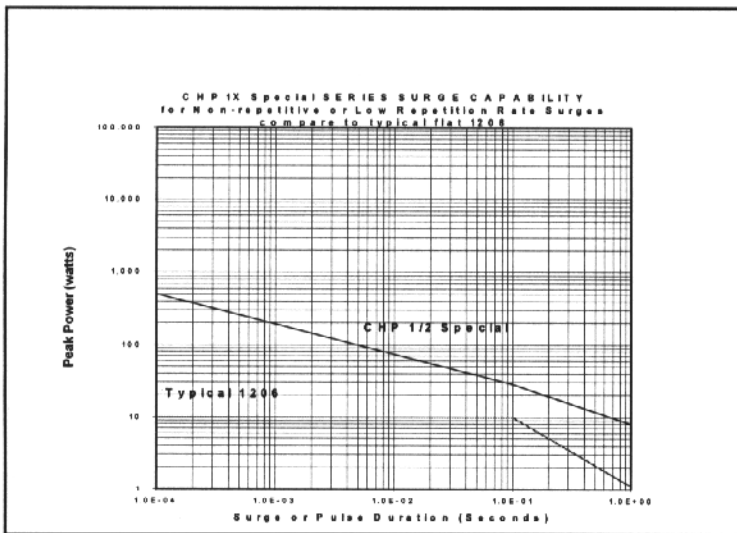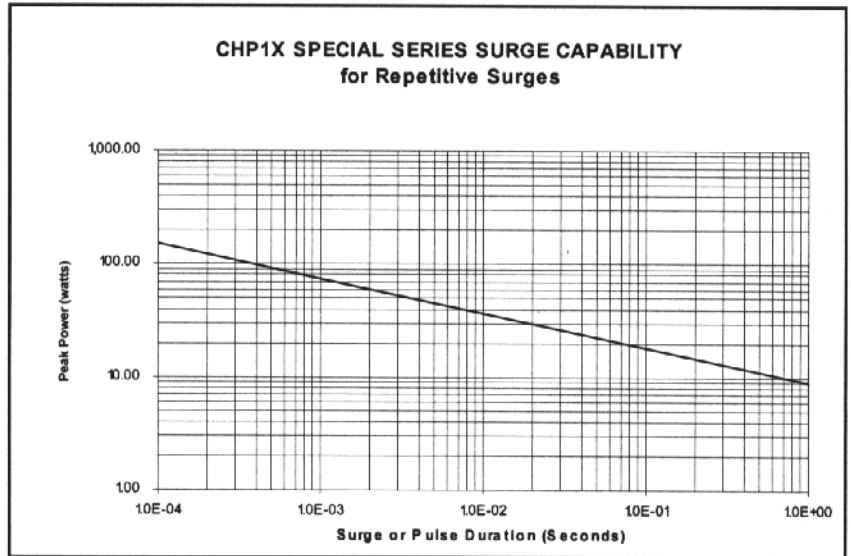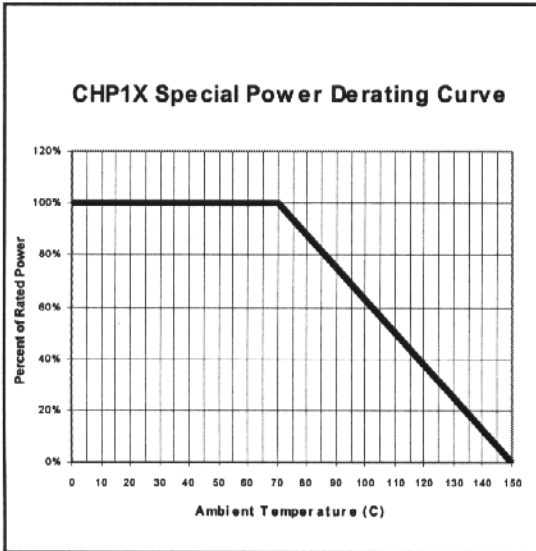

HOW TO ORDER:

Sample Part No.

CHP 1X - 100 - 2203 - F - 13

IRC Type _____
(CHP 1X)

Temperature Coefficient _____
(50 or 100)

Resistance Value _____
(100 ohms and greater - First 3 significant figures plus 4th digit multiplier)
Example: 100 ohms = 1000, 1000 ohms = 1001, 150,000 ohms = 1503
(Less than 100 ohms - "R" is used to designate decimal)
Example: 51 ohms = 51R0, 1 ohm = 1R00, 0.25 ohm = R250

Tolerance _____
(C = 0.25%, D = 0.5%, F = 1.0%, G = 2.0%, J = 5.0%)

Packaging Code* _____
(BLK = Bulk, 7=7" Reel, 13=13" Reel)