


POWER DIVIDERS, 6 WAY - 0°

Frequency Range (MHz)	Insertion Loss (dB) max.	Isolation (dB) min.	Amplitude Balance (dB) max.	Phase Balance (Deg) max.	VSWR max.	(1) Input Power (watts) max.	P/N
1-100	1.5	22	0.3	5.0	1.50:1	1	P6-01-*
10-500	2.0	22	0.4	5.0	1.50:1	1	P6-02-*
10-1000	2.5	22	0.4	6.0	1.50:1	1	P6-03-*


* Available in outline # 105, 107, 302, 303 & 434
75 Ohm or higher power models available upon request, consult factory.

Note: (1) For Load VSWR better than 1.2:1.


Port Configuration			
Outline	Input	Outputs	Ground
105	2	5,8,9,12,13,16	1,3,4,6,7,10,11,14,15
107	2	4,6,7,9,10,12	1,3,5,8,11
302	4	8-10,12-14	1-3,5-7,11
303	4	9,10,12,13,15,16	1-3,5-8,11,14

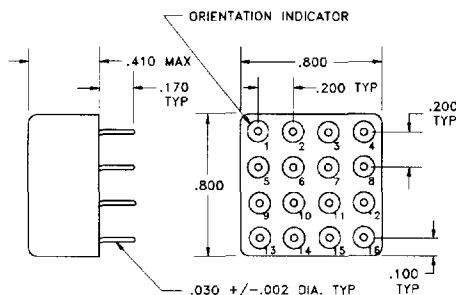


Outline 105

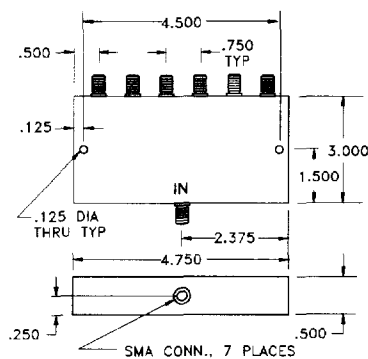


Outline 434

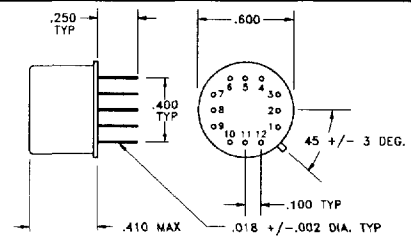

Outline 107

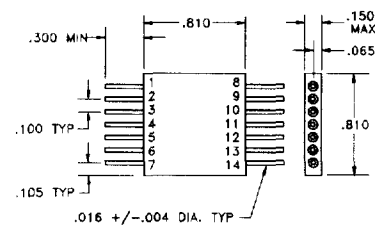

Outline 302

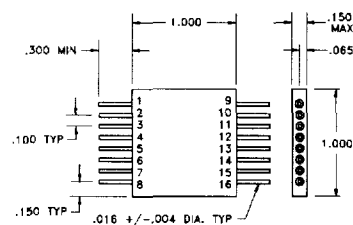

Outline 303