


6.4V TEMPERATURE COMPENSATED ZENER DIODE

1N4565 - 1N4584AD2A
1N4565 - 1N4584AD2B

- Hermetic Ceramic Surface Mount Package
- 6.4V $\pm 5\%$ Reference Voltage
- Stable over a wide temperature range
- Space Level and High-Reliability Screening Options Available

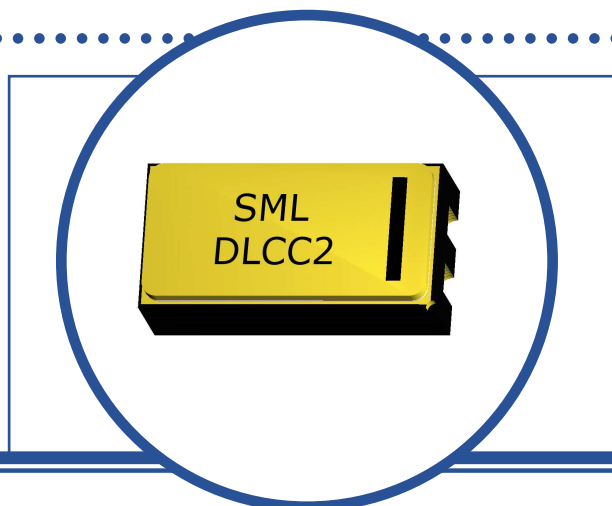

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise stated)

V_{ZM}	Reference Voltage	6.4V
$I_{ZM}^{(1)}$	Continuous DC Current	70mA
P_T	Total Power Dissipation at $T_A = 25^\circ\text{C}$ De-rate $T_A > 25^\circ\text{C}$	500mW 3.33mW/ $^\circ\text{C}$
T_J	Junction Temperature Range	-55 to +175 $^\circ\text{C}$
T_{STG}	Storage Temperature Range	-55 to +175 $^\circ\text{C}$
T_{SP}	Maximum Soldering Pad Temperature for 20s	260 $^\circ\text{C}$

THERMAL PROPERTIES

Symbol	Parameter	Min	Typ	Max	Units
$R_{\theta JA}$	Thermal Resistance Junction to Ambient			260	$^\circ\text{C}/\text{W}$

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise stated)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Units
V_Z	Zener Voltage	At I_{ZT}	6.08	6.4	6.72	V
ΔV_Z	Zener Voltage Coefficient from V_Z	See Electrical Stability Table				
I_R	Reverse Leakage Current	$V_R = 3\text{V}$			2.0	μA
Z_Z	Dynamic Impedance	See Electrical Stability Table				

Semelab Limited reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing an order.

6.4V TEMPERATURE COMPENSATED
ZENER DIODE
1N4565 - 1N4584AD2A
1N4565 - 1N4584AD2B

ELECTRICAL STABILITY CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise stated)

Type	I_{ZT}	ΔV_Z		Z_Z
	Zener Test Current	Zener Voltage Coefficient ⁽¹⁾		Dynamic Impedance
	$\pm 0.01\text{mA dc}^{(1)}$	At I_{ZT}		At I_{ZT} , $I_{sig} = 10\% I_{ZT}$ rms
		max.	$T_A \pm 2^\circ\text{C}$	max.
	mA	mV	$^\circ\text{C}$	Ω
1N4565	0.5	48	0, +25, +75	200
1N4566	0.5	24	0, +25, +75	200
1N4567	0.5	10	0, +25, +75	200
1N4568	0.5	5	0, +25, +75	200
1N4569	0.5	2	0, +25, +75	200
1N4565A	0.5	100	-55, 0, +25, +75, +100	200
1N4566A	0.5	50	-55, 0, +25, +75, +100	200
1N4567A	0.5	20	-55, 0, +25, +75, +100	200
1N4568A	0.5	10	-55, 0, +25, +75, +100	200
1N4569A	0.5	5	-55, 0, +25, +75, +100	200
1N4570	1.0	48	0, +25, +75	100
1N4571	1.0	24	0, +25, +75	100
1N4572	1.0	10	0, +25, +75	100
1N4573	1.0	5	0, +25, +75	100
1N4574	1.0	2	0, +25, +75	100
1N4570A	1.0	100	-55, 0, +25, +75, +100	100
1N4571A	1.0	50	-55, 0, +25, +75, +100	100
1N4572A	1.0	20	-55, 0, +25, +75, +100	100
1N4573A	1.0	10	-55, 0, +25, +75, +100	100
1N4574A	1.0	5	-55, 0, +25, +75, +100	100
1N4575	2.0	48	0, +25, +75	50
1N4576	2.0	24	0, +25, +75	50
1N4577	2.0	10	0, +25, +75	50
1N4578	2.0	5	0, +25, +75	50
1N4579	2.0	2	0, +25, +75	50
1N4575A	2.0	100	-55, 0, +25, +75, +100	50
1N4576A	2.0	50	-55, 0, +25, +75, +100	50
1N4577A	2.0	20	-55, 0, +25, +75, +100	50
1N4578A	2.0	10	-55, 0, +25, +75, +100	50
1N4579A	2.0	5	-55, 0, +25, +75, +100	50
1N4580	4.0	48	0, +25, +75	25
1N4581	4.0	24	0, +25, +75	25
1N4582	4.0	10	0, +25, +75	25
1N4583	4.0	5	0, +25, +75	25
1N4584	4.0	2	0, +25, +75	25
1N4580A	4.0	100	-55, 0, +25, +75, +100	25
1N4581A	4.0	50	-55, 0, +25, +75, +100	25
1N4582A	4.0	20	-55, 0, +25, +75, +100	25
1N4583A	4.0	10	-55, 0, +25, +75, +100	25
1N4584A	4.0	5	-55, 0, +25, +75, +100	25


Notes

(1) To guarantee voltage temperature stability, it is necessary to maintain a stable I_Z as specified

6.4V TEMPERATURE COMPENSATED ZENER DIODE


1N4565 - 1N4584AD2A
1N4565 - 1N4584AD2B

MECHANICAL DATA

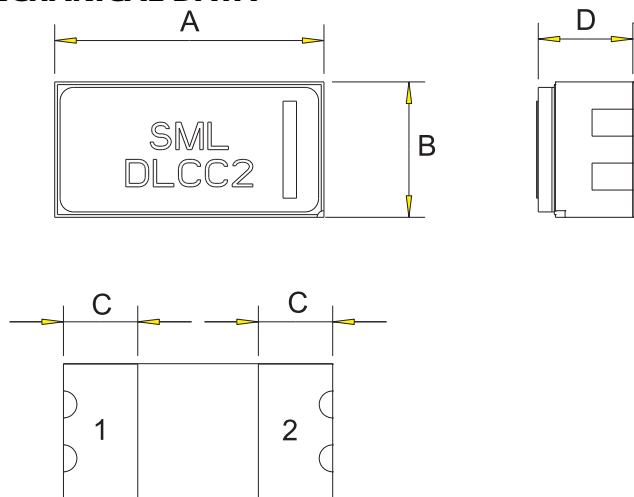

DLCC2 Variant A (D2A)


PAD 1	ANODE	
PAD 2	CATHODE	
DIMENSION	mm	Inches
A	5.00 ±0.10	0.197 ±0.004
B	2.61 ±0.10	0.103 ±0.004
C	1.08 ±0.10	0.043 ±0.004
D	1.76 ±0.10	0.069 ±0.004

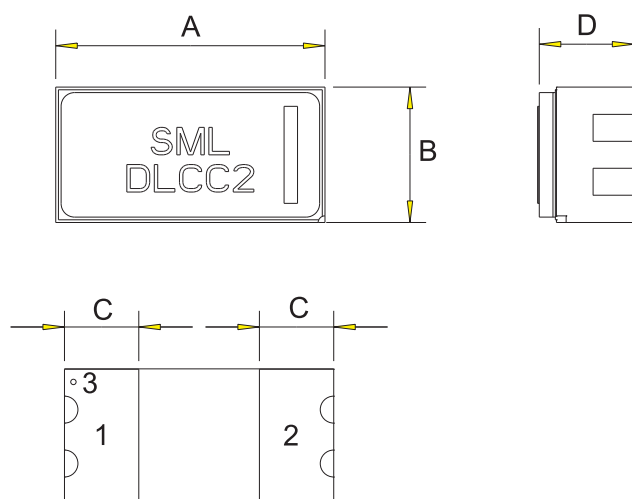

DLCC2 Variant B (D2B)


PAD 1	ANODE	
PAD 2	CATHODE	
PAD 3	LID CONTACT TO ANODE*	
DIMENSION	mm	Inches
A	5.00 ±0.10	0.197 ±0.004
B	2.61 ±0.10	0.103 ±0.004
C	1.08 ±0.10	0.043 ±0.004

DLCC2/ D-5A MELF OVERLAY

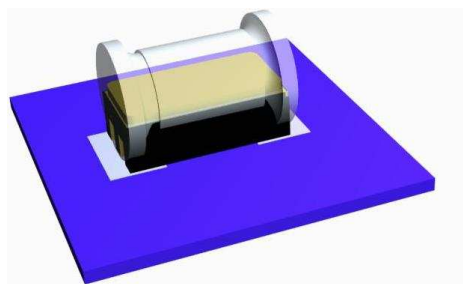

SOLDER PAD LAYOUT D-5A

DIMENSION	mm	Inches
A	6.25	0.246
B	1.70	0.067
C	2.67	0.105



* The additional contact provides a connection to the lid in the application. Connecting the metal lid to a known electrical potential stops deep dielectric discharge in space applications; see the Space Weather link www.semelab.co.uk/dlcc2.html on the Semelab web site. Package variant to be specified at order.

Other Package Outlines may be available – Contact Semelab Sales to Enquire

6.4V TEMPERATURE COMPENSATED ZENER DIODE

1N4565 - 1N4584AD2A
1N4565 - 1N4584AD2B

SCREENING OPTIONS

Space Level (JQRS/ESA) and High Reliability options are available in accordance with the [High Reliability and Screening Options Handbook](#) available for download from the from the TT electronics Semelab web site.

ESA Quality Level Products are based on the testing procedures specified in the generic ESCC 5000 and in the corresponding part detail specifications.

Semelabs QR216 and QR217 processing specifications (JQRS), in conjunction with the companies ISO 9001:2000 approval present a viable alternative to the American MIL-PRF-19500 space level processing.

QR217 (Space Level Quality Conformance) is based on the quality conformance inspection requirements of MIL-PRF-19500 groups A (table V), B (table VIa), C (table VII) and also ESA / ESCC 5000 (chart F4) lot validation tests.

QR216 (Space Level Screening) is based on the screening requirements of MIL-PRF-19500 (table IV) and also ESA / ESCC 5000 (chart F3).

JQRS parts are processed to the device data sheet and screened to QR216 with conformance testing to Q217 groups A and B in accordance with MIL-STD-750 methods and procedures.

Additional conformance options are available, for example Pre-Cap Visual Inspection, Buy-Off Visit or Data Packs. These are chargeable and must be specified at the order stage (See Ordering Information). Minimum order quantities may apply.


Alternative or additional customer specific conformance or screening requirements would be considered. Contact Semelab sales with enquiries.

MARKING DETAILS

Parts can be laser marked with approximately 7 characters on two lines and always includes cathode identification. Typical marking would include part or specification number, week of seal or serial number subject to available space and legibility.

Customer specific marking requirements can be arranged at the time of order.

Example Marking:



ORDERING INFORMATION

Part numbers are built up from Type, Package Variant, and screening level. The part numbers are extended to include the additional options as shown below.

Type – See Electrical Stability Characteristics Table
Package Variant – See Mechanical Data
Screening Level – See Screening Options (ESA / JQRS)

Additional Options:

Customer Pre-Cap Visual Inspection	.CVP
Customer Buy-Off visit	.CVB
Data Pack	.DA
Solderability Samples	.SS
Scanning Electron Microscopy	.SEM
Radiography (X-ray)	.XRAY
Total Dose Radiation Test	.RAD
MIL-PRF-19500 (QR217)	
Group B charge	.GRPB
Group B destructive mechanical samples	.GBDM (12 pieces)
Group C charge	.GRPC
Group C destructive electrical samples	.GCDE (12 pieces)
Group C destructive mechanical samples	.GCDM (6 pieces)
ESA/ESCC	
Lot Validation Testing (subgroup 1) charge	.LVT1
LVT1 destructive samples (environmental)	.L1DE (15 pieces)
LVT1 destructive samples (mechanical)	.L1DM (15 pieces)
Lot Validation Testing (subgroup 2) charge	.LVT2
LVT2 endurance samples (electrical)	.L2D (15 pieces)
Lot Validation Testing (subgroup 3) charge	.LVT3
LVT3 destructive samples (mechanical)	.L3D (5 pieces)

Additional Option Notes:

- 1) All 'Additional Options' are chargeable and must be specified at order stage.
- 2) When Group B,C or LVT is required, additional electrical and mechanical destructive samples must be ordered
- 3) All destructive samples are marked the same as other production parts unless otherwise requested.

Example ordering information:

The following example is for the 1N4565A part with package variant A, JQRS screening, additional Group C conformance testing and a Data pack.

Part Numbers:

1N4565AD2A-JQRS (Include quantity for flight parts)
1N4565AD2A-JQRS.GRPC (chargeable conformance option)
1N4565AD2A-JQRS.GCDE (charge for destructive parts)
1N4565AD2A-JQRS.GCDM (charge for destructive parts)
1N4565AD2A-JQRS.DA (charge for Data pack)

Customers with any specific requirements (e.g. marking or screening) may be supplied with a similar alternative part number (there is maximum 20 character limit to part numbers). Contact Semelab sales with enquiries.

High Reliability and Screening Options Handbook link: http://www.semelab.co.uk/pdf/misc/documents/hirel_and_screening_options.pdf