

**Straight through hole type male connector for PCB**  
**LPC-( ) (T ) MA2( )**


**2 mm pitch connector**

**For PCB**

**Straight Through hole**

**Low profile**

RoHS

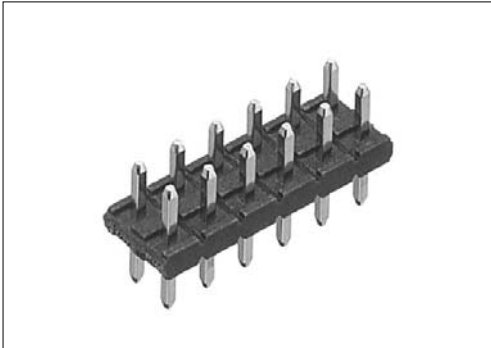


● Configuration of product Part No.

**LPC- ( ) (T ) MA2 ( )**

①      ②      ③      ④

- ① Series name
- ② No. of contacts: 4-24
- ③ Length No. of contact:  
Refer to the table of dimensions below.
- ④ Contact plating  
+S: Tin plate  
G : Gold plate

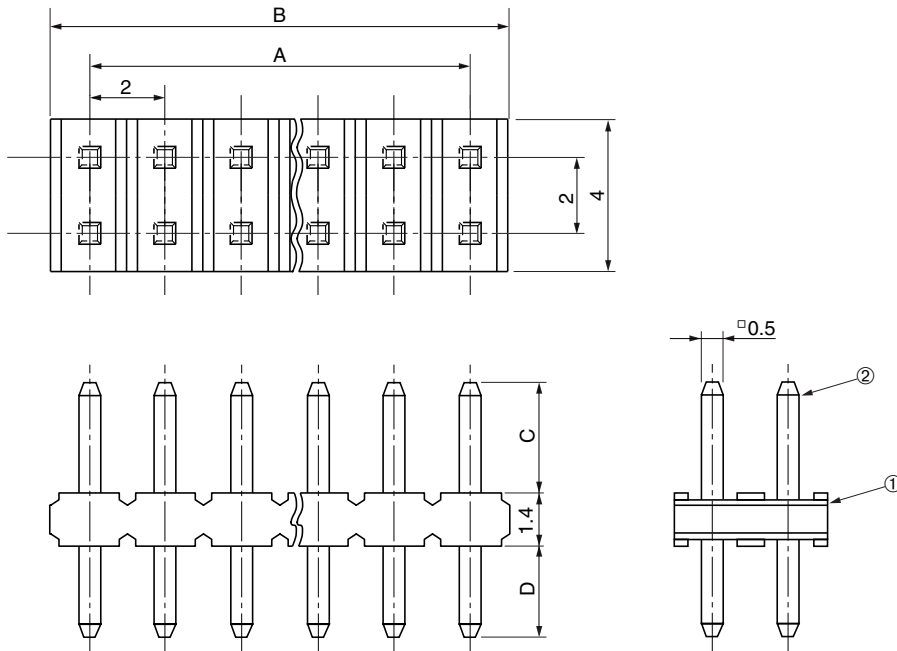

● Dimensions

Part No.	A	B
LPC-4(T)MA2( )	2	4
LPC-6(T)MA2( )	4	6
LPC-8(T)MA2( )	6	8
LPC-10(T)MA2( )	8	10
LPC-12(T)MA2( )	10	12
LPC-14(T)MA2( )	12	14
LPC-16(T)MA2( )	14	16
LPC-18(T)MA2( )	16	18
LPC-20(T)MA2( )	18	20
LPC-22(T)MA2( )	20	22
LPC-24(T)MA2( )	22	24

Part No.	C	D
LPC-( )MA2( )	3	3
LPC-( )TMA2( )	2.5	2.5
LPC-( )T1MA2( )	1.5	
LPC-( )T2MA2( )	2	1
LPC-( )T3MA2( )	1.5	2
LPC-( )T4MA2( )		2.9
LPC-( )T5MA2( )	2.9	2.1
LPC-( )T6MA2( )	3.5	5.7
LPC-( )T7MA2( )		5.1

● Components

①	Insulator
②	Contacts

Because some combinations of "Configurations of Product Part No.", are under consideration for development, please contact us for availability details.

Mating connectors: LPC series female connectors or shunt plugs