




Series 89 Nanominiature Connectors

Single Row Right Angle Printed Circuit Board

890-008 and -009

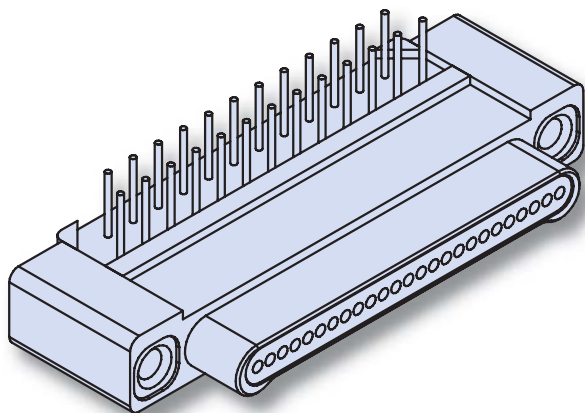

Right Angle Thru Hole PCB Nano Connectors feature gold alloy NanoPin contacts. These nanominiature connectors offer premium performance and reliability for demanding applications. Available with #0-80 threaded inserts, or with jackscrews for use with flexible circuits.

Pre-Tinned PC Tails are coated with Sn63Pb37 tin-lead for excellent solderability.

Choose Aluminum, Titanium or Stainless Steel Shells in seven layouts from 9 to 51 contacts. Complies to the requirements of MIL-DTL-32139. These connectors are intermateable with any corresponding Glenair Series 890 single row metal shell nanominiature connector.

HOW TO ORDER RIGHT ANGLE PCB CONNECTORS

Series	Insert Arrangement/ Contact Type	Shell Material and Finish	Termination Type	PC Tail Length	Hardware
890-008 Plug, Pin Contacts, Single Row, Right Angle Thru-Hole PCB Nanominiature	Plugs (890-008)	A1 Aluminum Shell, Cadmium Plating A2 Aluminum Shell, Electroless Nickel Plating	BRT "Board Right Angle Thru-Hole"	1 .110 Inch (2.79 mm)	J Jackscrew, #0-80
	9P				
	15P				
	21P				
	25P				
890-009 Receptacle, Socket Contacts, Single Row, Right Angle Thru-Hole PCB Nanominiature	Receptacles (890-009)	T Titanium Shell, Unplated S Stainless Steel Shell, Passivated		2 .172 Inch (43.69 mm)	T Threaded Inserts, #0- 80 Female
	31P				
	37P				
	51P				
	9S				
	15S				
	21S				
25S					
31S					
37S					
51S					
Sample Part Number					
890-008	- 51P	A2	- BRT	1	T

MATERIALS AND FINISHES


Connector Shell	See Ordering Information
Insulator	Liquid Crystal Polymer (LCP), 30% Glass-Filled
Contacts	Gold Alloy, Unplated
Hardware	300 Series Stainless Steel
PC Tails	#30 (.010 Dia.) Copper Wire, Solder Dipped
PCB Trays	Liquid Crystal Polymer (LCP) or Epoxy
Encapsulant	Epoxy

SPECIFICATIONS




Durability	200 Cycles Minimum
Current Rating	1 AMP Maximum
Voltage Rating (DWV)	300 VAC RMS Sea Level
Insulation Resistance	5000 Megohms Minimum
Operating Temperature	-55° C. to +125° C.
Contact Resistance	71 mV. @1 AMP #30 AWG Wire
Thermal Vacuum Outgassing	1.0% Max TML, 0.1% Max.

SINGLE ROW NANO RIGHT ANGLE PCB DIMENSIONS

Plug (Pin) Connectors

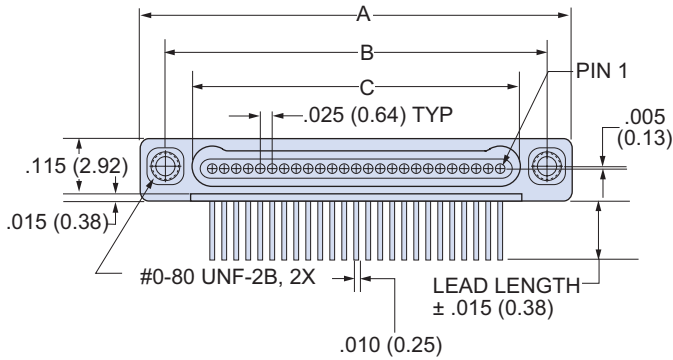

Receptacle (Socket) Connectors

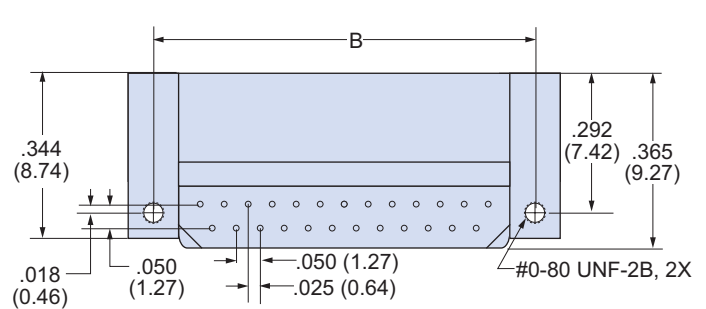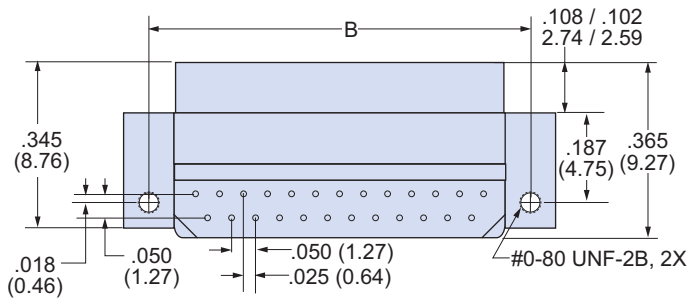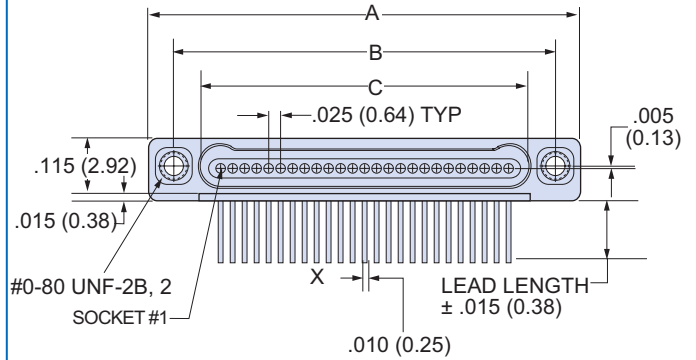


Layout	A Dimension		B Basic Dimension		C Basic Dimension	
	In.	mm.	In.	mm.	In.	mm.
9P	.500	12.70	.395	10.03	.284	7.21
9S	.500	12.70	.395	10.03	.285	7.24
15P	.650	16.51	.545	13.84	.434	11.02
15S	.650	16.51	.545	13.84	.435	11.05
21P	.800	20.32	.695	17.65	.584	14.83
21S	.800	20.32	.695	17.65	.585	14.86
25P	.900	22.86	.795	20.19	.684	17.37
25S	.900	22.86	.795	20.19	.685	17.40
31P	1.050	26.67	.945	24.00	.834	21.18
31S	1.050	26.67	.945	24.00	.835	21.21
37P	1.200	30.48	1.095	27.81	.984	24.99
37S	1.200	30.48	1.095	27.81	.985	24.02
51P	1.550	39.37	1.445	36.70	1.334	33.88
51S	1.550	39.37	1.445	36.70	1.335	33.91


Patterns shown are for connector mounting side of PC Board.

RIGHT ANGLE PCB PLUG (PIN) CONNECTOR LAYOUT 890-008


9 Contacts

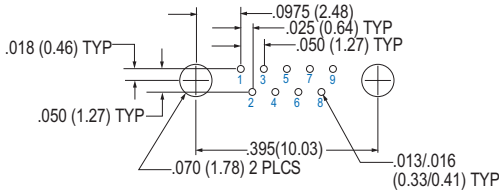


15 Contacts

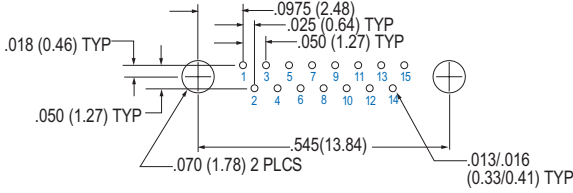


21 Contacts

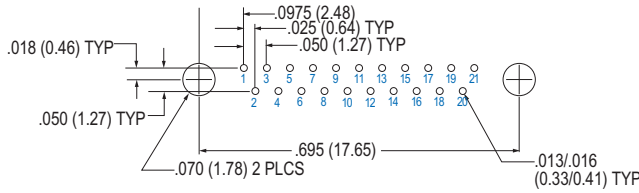


25 Contacts

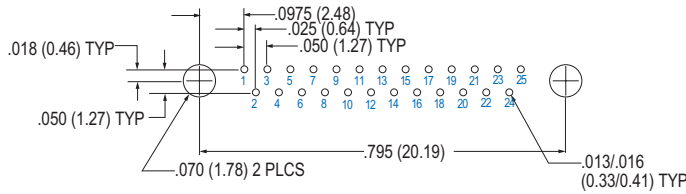



31 Contacts

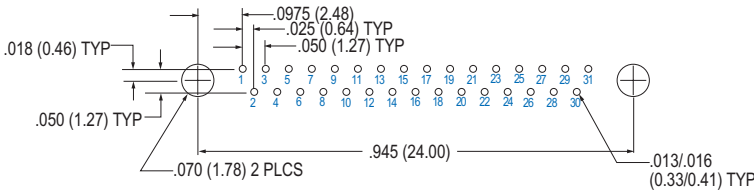

37 Contacts

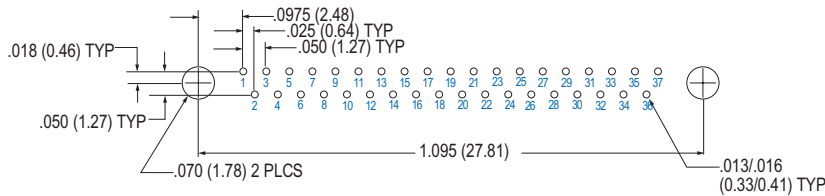

51 Contacts

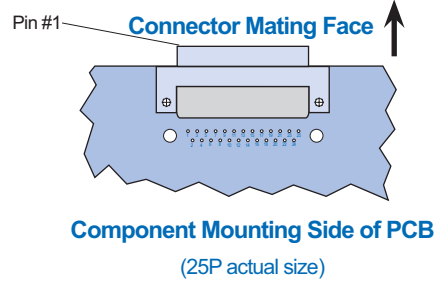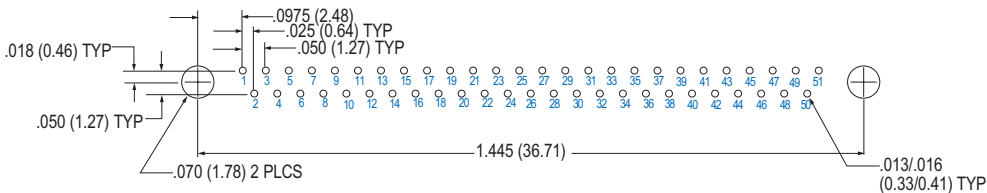



Series 89 Nanominiature Connectors Single Row Right Angle Printed Circuit Board 890-008 and -009



Patterns shown are for connector mounting side of PC Board.


RIGHT ANGLE PCB RECEPTACLE (SOCKET) CONNECTOR LAYOUT 890-009

9 Contacts

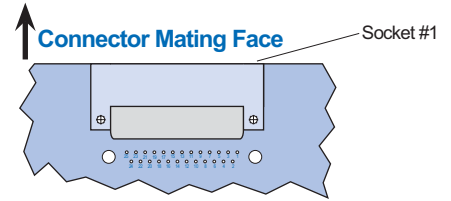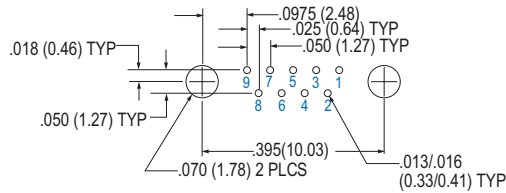


Component Mounting Side of PCB
(25S actual size)


15 Contacts

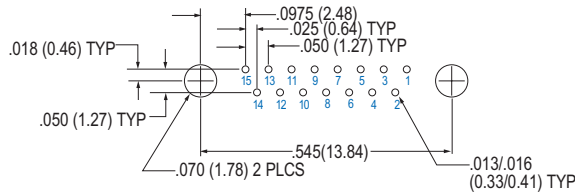


21 Contacts

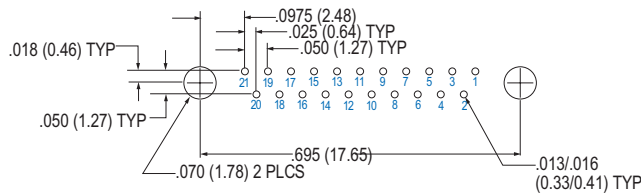


25 Contacts

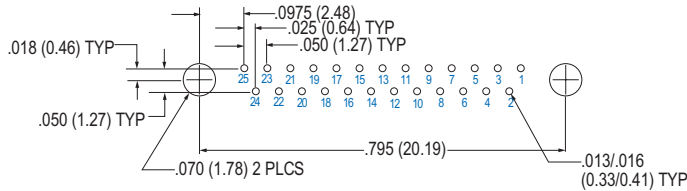

31 Contacts

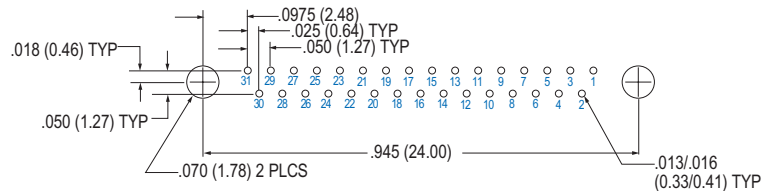

37 Contacts

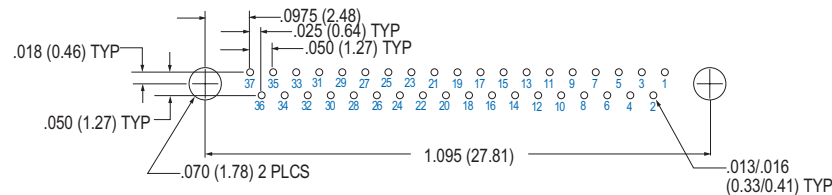

51 Contacts

