


(2,54mm) .100"

PHT SERIES

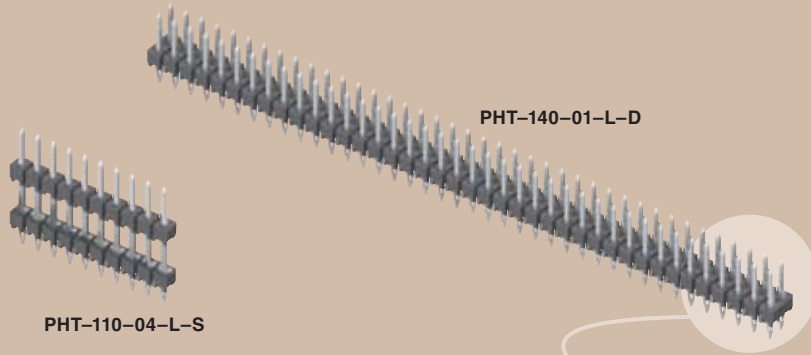

PRESS FIT .025" SQ POST HEADER

SPECIFICATIONS

For complete specifications see www.samtec.com?PHT

Insulator Material:

Liquid Crystal
Polymer

Contact Material:

Phosphor Bronze

Plating:

Au or Sn over 50µ" (1,27µm) Ni

Current Rating:

2.9A @ 30°C temperature rise

Operating Temp Range:

-55°C to +125°C with Gold

RoHS Compliant:


Yes

Processing:

Contact ipg@samtec.com


Mates with:

SSW, SSQ, ESW, ESQ, BCS, BSW, IDSD, IDSS, CES, SLW, PHF, SSM

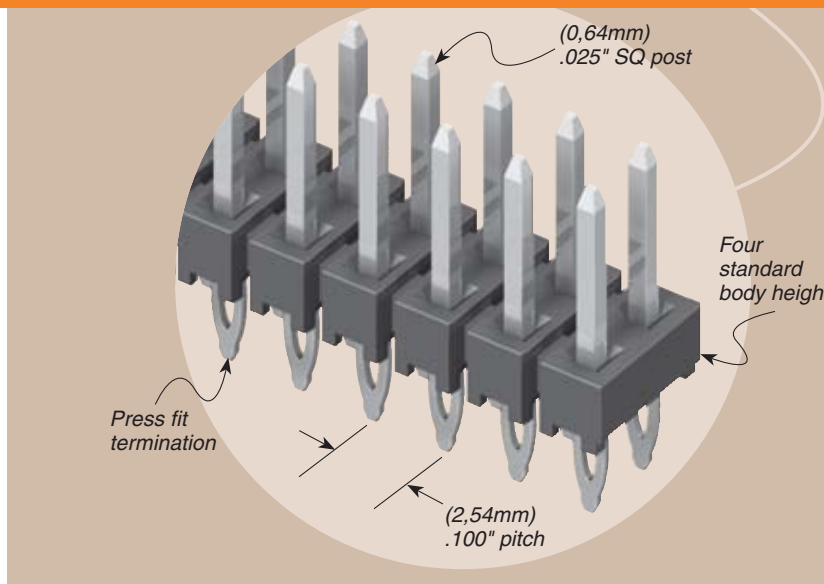

PHT	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	OTHER OPTION
		01 = (single row only) 02 thru 50	Specify LEAD STYLE from chart	-L = 10µ" (0,25µm) Gold on post, Matte Tin on tail	-S = Single Row -D = Double Row	-“XXX” = Polarized Position

LEAD STYLE	A
-01	(2,54) .100
-02	(5,08) .200
-03	(7,62) .300
-04	(10,16) .400

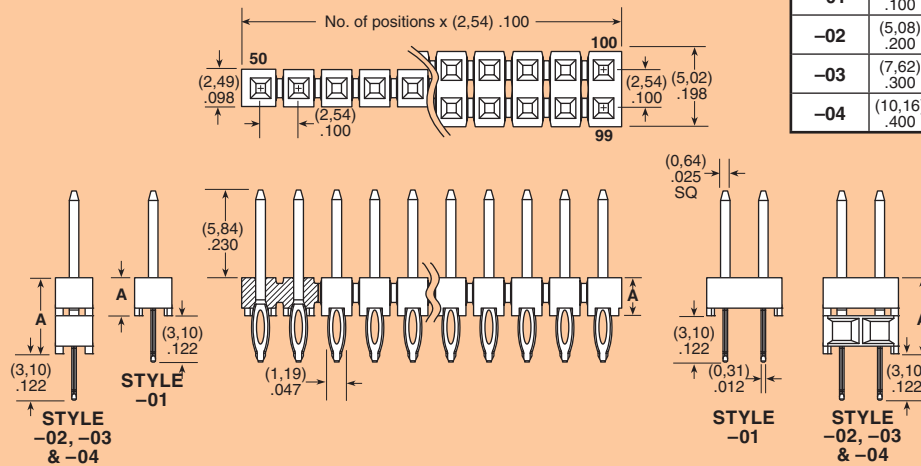

ALSO AVAILABLE

- Other plating options.
- Press fit tooling available. Call Samtec.

Note: Some lengths, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM