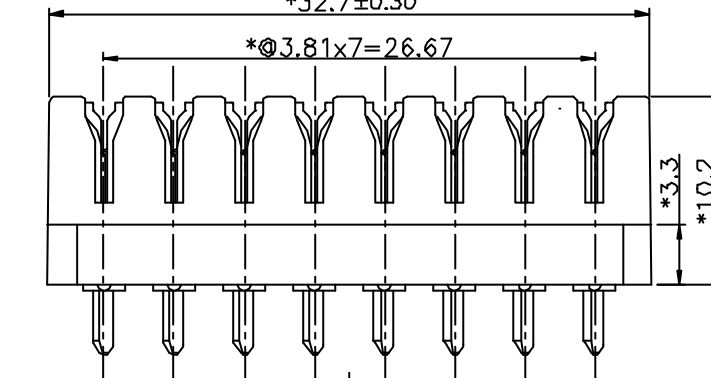
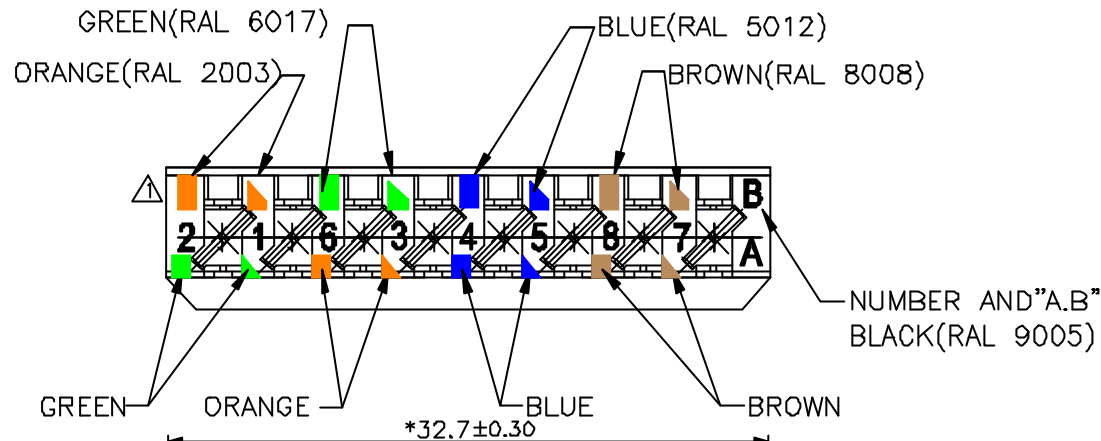




NOTE:

1. Housing : PC UL94V-0
2. Contact : Phosphor Bronze with Tin plating
3. Wire : cable sizes :
Solid copper wires up to 0.4mm - 0.8mm in diameter
Insulation :
PE or PVC insulated wire (100% PE/foam skin, filled/unfilled)
up to 1.4mm in diameter
4. Contact resistance : 10 Milliohms Max.
5. Voltage Rating : 250 VDC
6. Operating Temperature : -20°C to +80°C and Humidity up to 95%
7. Insulation Resistance : 500 VDC, voltage applied 5000 Megohms Min.
8. Dielectric Strength : AC 2000 Vrms

PART NUMBER(FOR AA):15814DL

PART NUMBER(FOR FRE):E4808-90UY1A

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
Δ		Design change	ZY	04/05/03*

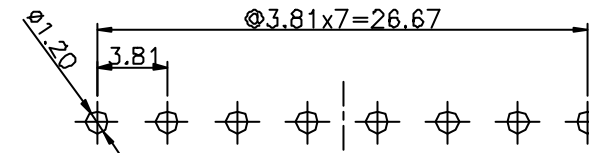PC Board Layout
Component Side Shown

DIMENSIONS (INCH) TOLERANCES EXCEPT AS NOTED MM ±0.20 ±0.15 ±0.075 ANGLES ± THIRD ANGLE PROJECTION	DATE	12/18/02	FULL RISE ELECTRONIC CO., LTD	
	DATE	2003/05/06		
	DATE	2003/05/06	TITLE IDC TERMINAL BLOCK 8P	
	DATE	2003/05/06	15814DL	
MATERIAL .			(BOTTOM CLOSURE)	
QTY :			DRAWING NO. GE483103	SIZE A3
FINISH :			/PART NO. SEE NOTE	REV 1
SCALE			DO NOT SCALE DRAWING	SHEET X OF Y